




General description

The SD36C is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time , make these parts ideal for ESD protection on designs where board space is at a premium.

Features and benefits

- Reverse stand-off voltage: 36V Max
- Low leakage current: nA Level
- Low Clamping Voltage
- Response time is typically < 1 ns
- IEC61000-4-2 Level 4 ESD Protection

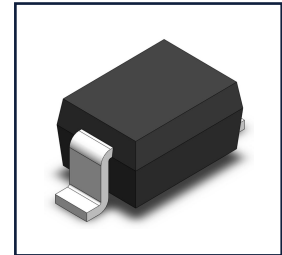

SOD323

Application information

- Cell phones
- Audio equipment
- Portable devices
- Digital cameras
- Power supplies

Ordering information

Device	Package	Reel Size	Qty(PCS)
SD36C	SOD323	7 Inch	3000

Ordering information

Marking	Naming rule	Graphic symbol
9/e		



Maximum Ratings ($T_A = 25^\circ\text{C}$, unless otherwise specified)


Parameter	Symbol	Value	Unit
Peak Pulse Power ($t_p = 8/20\mu\text{s}$)	P_{PPM}	390	W
Peak Pulse Current ($t_p = 8/20\mu\text{s}$)	I_{PPM}	6	A
Maximum lead temperature for soldering during 10s	T_L	260	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^\circ\text{C}$
Operating Temperature Range	T_{OP}	-40 to +125	$^\circ\text{C}$
Maximum junction temperature	T_j	150	$^\circ\text{C}$
ESD voltage IEC 61000-4-2 (air discharge)	V_{ESD}	30	kV
ESD voltage IEC 61000-4-2 (contact discharge)	V_{ESD}	30	kV

Electrical Characteristics ($T_A = 25^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Reverse Working Voltage	V_{RWM}	--	--	36.0	V	
Breakdown Voltage	V_{BR}	39.0	--	46.0	V	$I_T = 1\text{mA}$
Leakage Current I_{Leak}	I_R	--	--	100	nA	$V_{RWM} = 36\text{V}$
Clamping Voltage	V_C	--	48	50	V	$I_{PP} = 1\text{A}, t_p = 8/20\mu\text{s}$
Clamping Voltage	V_C	--	60	65	V	$I_{PP} = 6\text{A}, t_p = 8/20\mu\text{s}$
Junction Capacitance	C_J	--	14	16	pF	$V_R = 0\text{V}, f = 1\text{MHz}$

Portion Electronics Parameter


Symbol	Parameter
I_{PPM}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Reverse Leakage Current @ V_{RWM}
I_T	Test Current
V_{BR}	Breakdown Voltage @ I_T

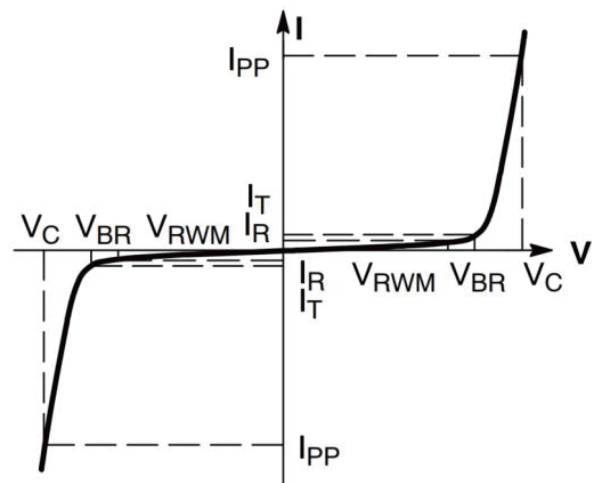



Package Outline Dimensions

SOD323

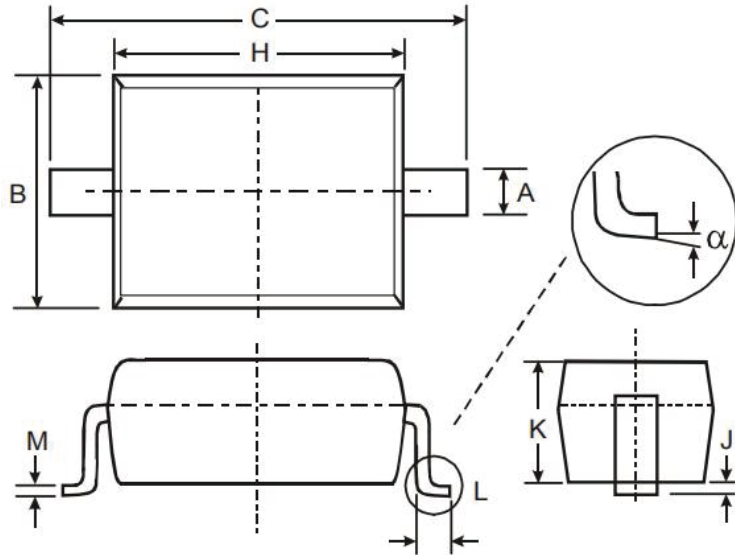

SYMBOL	MILLIMETERS	
	MIN	MAX
A	0.25	0.35
B	1.20	1.40
C	2.40	2.70
H	1.60	1.80
J	0.01	0.15
K	0.80	1.00
L	0.20	0.40
M	0.08	0.15
α	0°	8°

Soldering Footprint (mm)

