

◆ Product Description

The SL1120 is a Hall-effect latch designed in CMOS technology. The IC internally includes a voltage regulator, Hall sensor with dynamic offset cancellation system, Schmitt trigger and an open-drain output driver. With no magnetic field present, the output is in the “on” state(Low). While the magnetic flux density(B) is larger than operate point(Bop),the output will be turned off(High) and the output is latched “off” state until the magnetic flux density (B) is lower than release point(Brp),then turn on(Low). It has wide operating voltage range and extended choice of temperature range, it is quite suitable for use in automotive, industrial and consumer applications.

◆ Features

- 3.5V to 24V DC Operation Voltage
- CMOS Technology
- Chopper-stabilized amplifier stage
- 25mA Output Sink Current
- Operating Temperature: -40~ +125°C
- High Magnetic Sensitivity: B_{hys}=60Gauss(Typ.)
- Lead Free Package: SIP-3L and SC59
(Commonly known as TO-92S and SOT-23-3L in Asia)
- Lead Free Finish/RoHS Compliant

◆ Application

- Rotor Position Sensing
- Current Switch
- Encoder
- RPM Detection

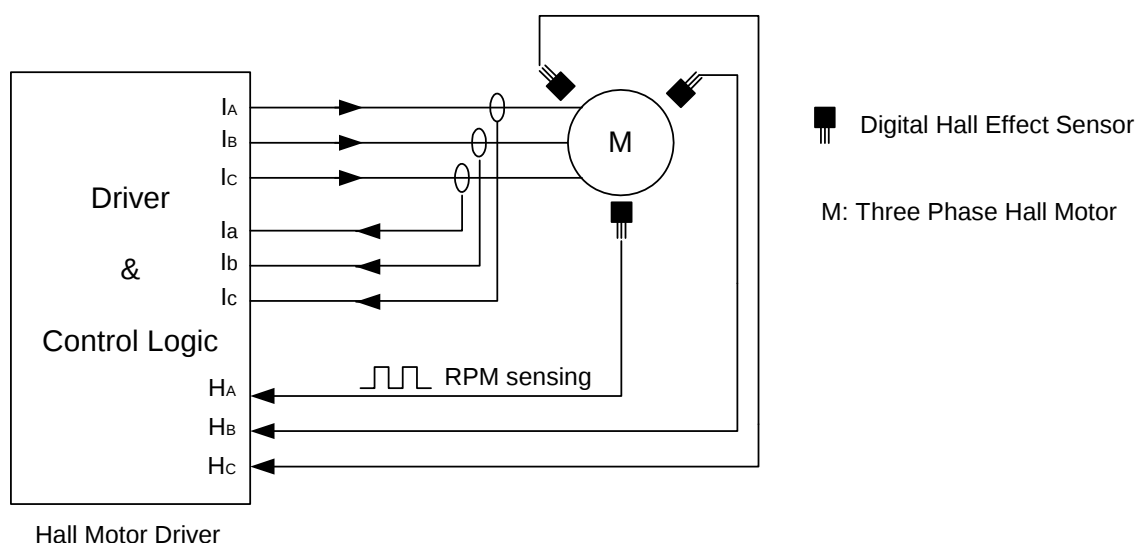


Fig.1 Functional Application Circuit in 3-Phase Hall Motor

◆ Pin Description

Table 1-1 Pin definition and description for SIP-3L(TO-92S)

PIN #	NAME	P/I/O	FUNCTION DESCRIPTION
1	VDD	P	Input Power Supply
2	GND	P	Ground
3	OUT	O	Output Stage of Open Drain


Table 1-2 Pin definition and description for SC59(SOT-23-3L)

PIN #	NAME	P/I/O	FUNCTION DESCRIPTION
1	VDD	P	Input Power Supply
2	OUT	O	Output Stage of Open Drain
3	GND	P	Ground


◆ Pin Configuration

(Top View)


TO-92S

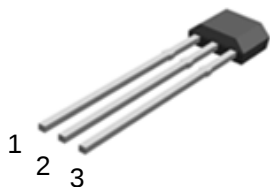

SOT-23-3L



SOT23



◆ **Absolute Maximum Rating** (Note 1)

SYMBOL	PARAMETER	RATING
VDD	Supply Voltage	+28VDC
Vout (off)	Voltage externally applied to output	+28VDC max, OFF condition only -0.5 V min., OFF or ON condition
Io (sink)	Output "ON" Current	50 mA
PD	Power Dissipation	450mW(SIP-3L);230mW(SC59)
Top	Operation Temperature Range	-40 to +125 °C
Tst	Storage Temperature Range	-65 to +150 °C
B	Magnetic Flux	No limit.

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

◆ **Electrical Characteristics** (TA = 25°C)

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP	MAX	UNIT
VDD	Supply Voltage		Operating	3.5		24	V
VO(SAT)	Output Saturation Voltage		VDD = 12V, OUT "ON", Io = 10mA			300	mV
			VDD = 12V, OUT "ON", Io = 20mA			500	mV
IDD	Supply Current		VDD =3.5~24V, OUT "OFF"		2.0	5.0	mA
ILE	Output Leakage Current (Leakage into sensor output)		Released			10	μ A
Tr	Output Switching Time	Rise Time	RL=820Ω, CL=20pF			0.45	μ S
Tf		Fall Time	RL=820Ω, CL=20pF			0.45	μ S
F _{SW}	Maximum Switching Frequency				10		KHz

◆ **Magnetic Characteristics** (TA = 25°C, VDD=12V)

SYMBOL	PARAMETER	MIN.	TYP.	MAX.	UNIT
Bop	Operation Point	5	30	80	Gauss
Brp	Release Point	-80	-30	-5	Gauss
Bhy	Hysteresis	30	60	90	Gauss

◆ Functional Block Diagram

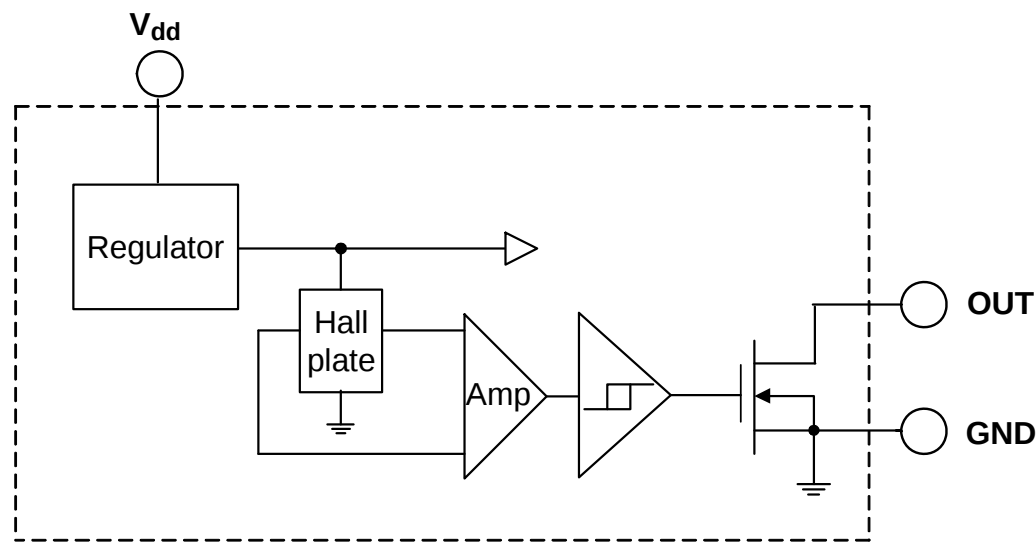


Figure 1. Function Block Diagram of SL1120

◆ Operating Characteristics

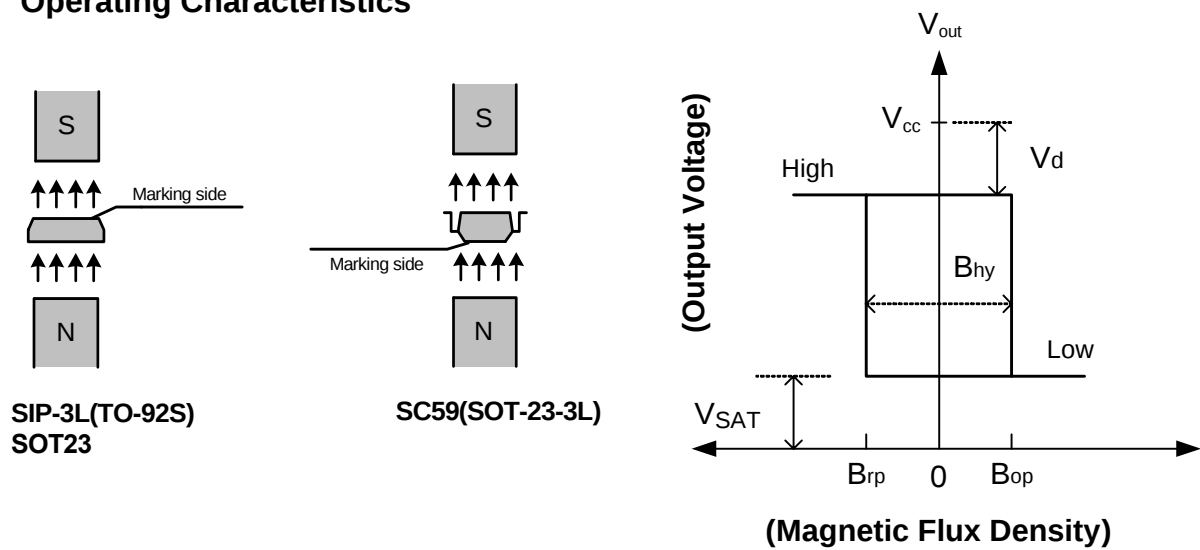


Figure 2. Operating Characteristics of SL1120

Table 2: Switching Function

Parameter	Pole	OUT	Pole	OUT
	(SC59/SOT-23-3L)		(SIP-3L/TO-92S)	
South Pole	$B < B_{RP}$	High	$B > B_{OP}$	Low
North Pole	$B > B_{OP}$	Low	$B < B_{RP}$	High

◆ **Typical Characteristics**

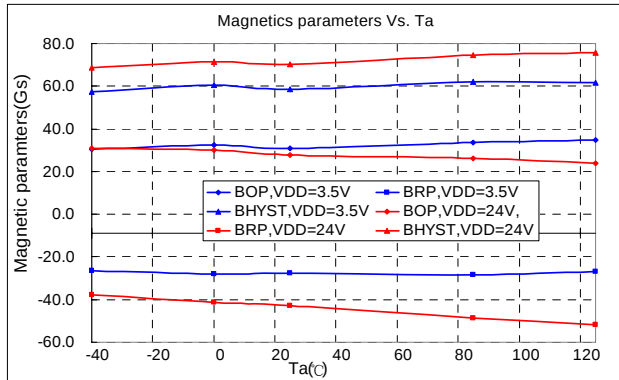


Figure 3-1. Magnetic parameters Vs. Ta

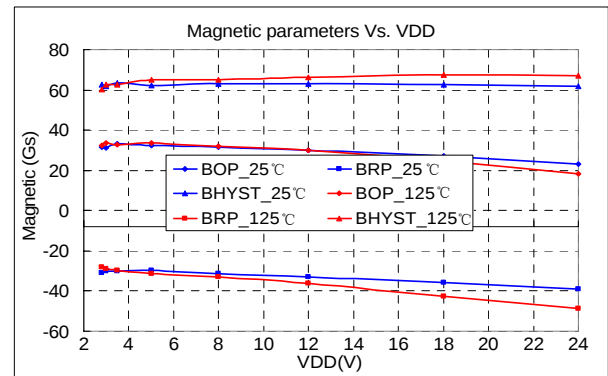


Figure 3-2. Magnetic parameters Vs. VDD

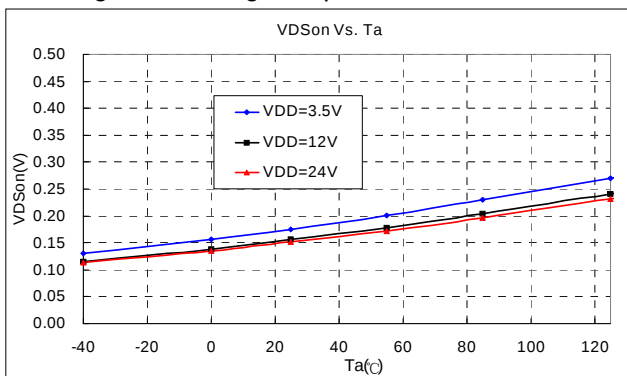


Figure 3-3. VDSon Vs. Ta

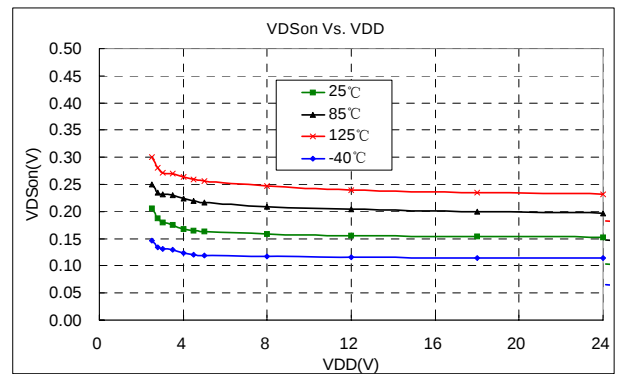


Figure 3-4. VDSon Vs. VDD

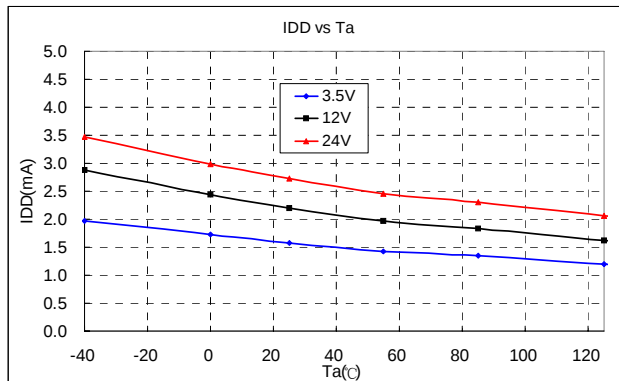


Figure 3-5. IDD Vs. Ta

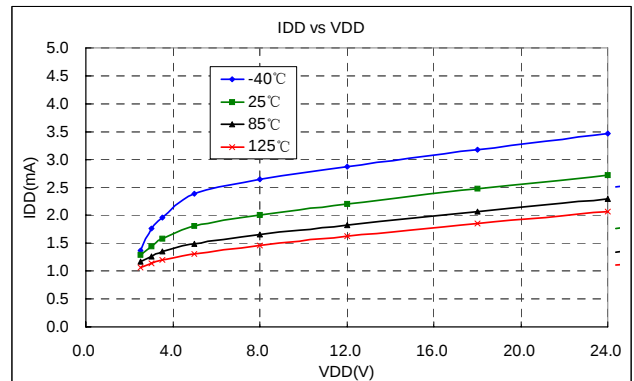


Figure 3-6. IDD Vs. VDD

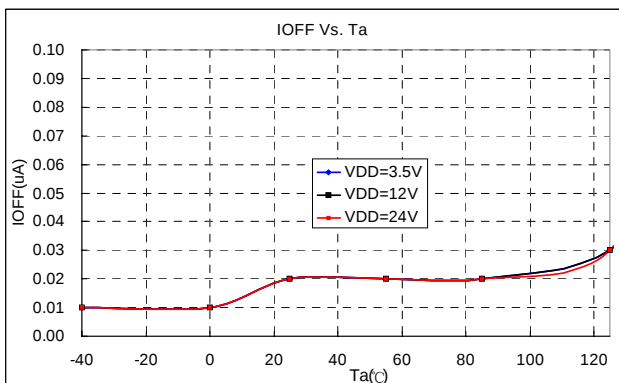


Figure 3-7. IOFF Vs. Ta

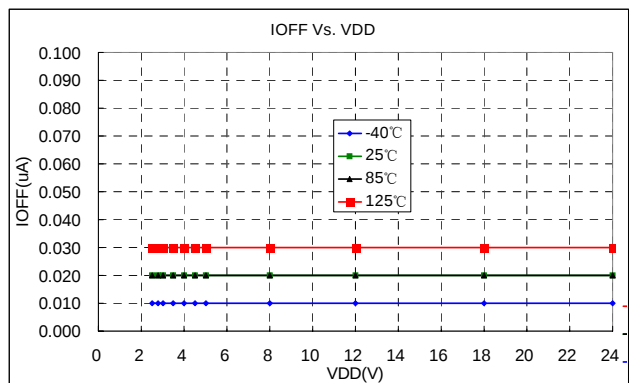
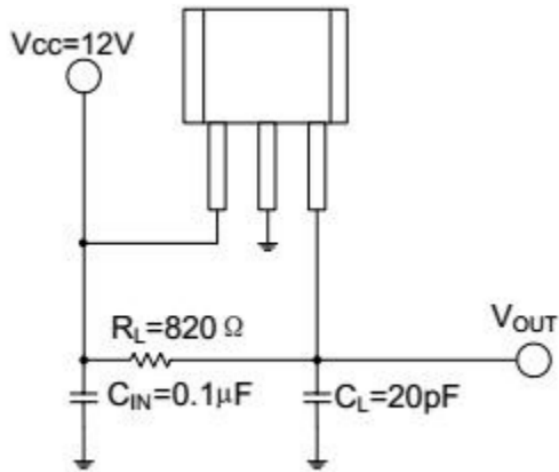



Figure 3-8. IOFF Vs. VDD

◆ Typical Application Circuit



Note: C_{IN} is used to stabilize external power supply. R_L is the pull-up resistance necessary for open collector output, with a value range of $820\ \Omega \sim 100\ k\Omega$, depending on the current capacity required by the back-end input; C_L is used to filter out the output noise. This capacitor will affect the rise time of the waveform

◆ **Package Information** (unit: mm)

(1) UA: SIP-3L(TO-92S) for Bulk only

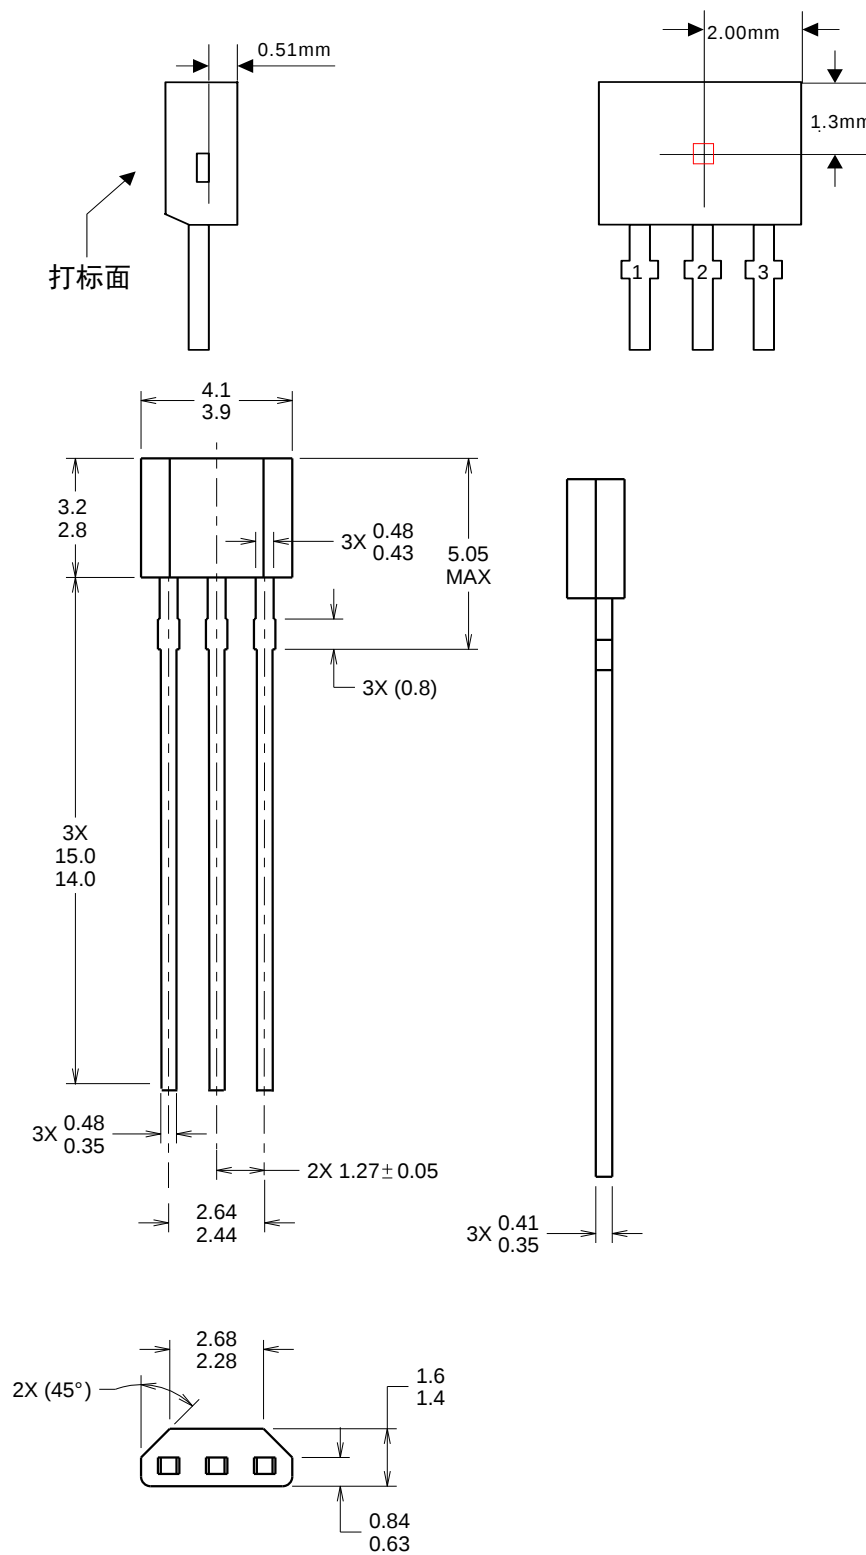

(2) SW: SOT-23-3L

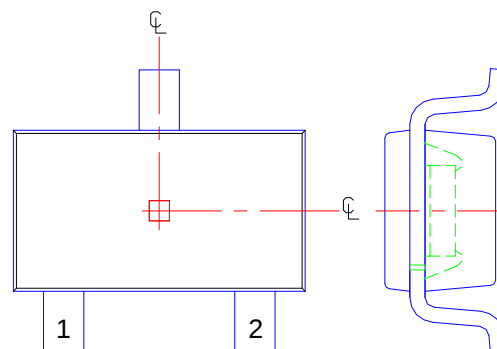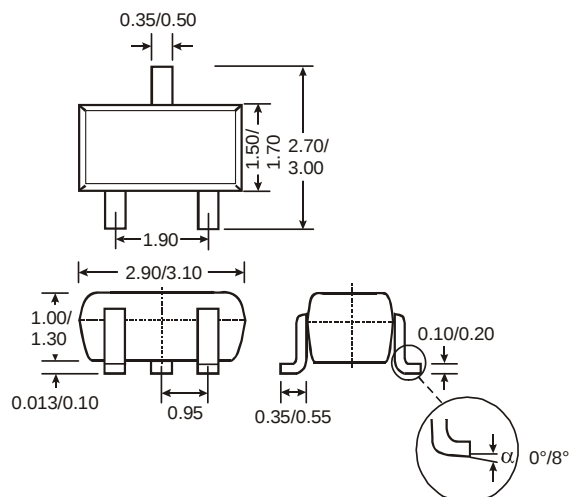

(3) SE: SOT23

