



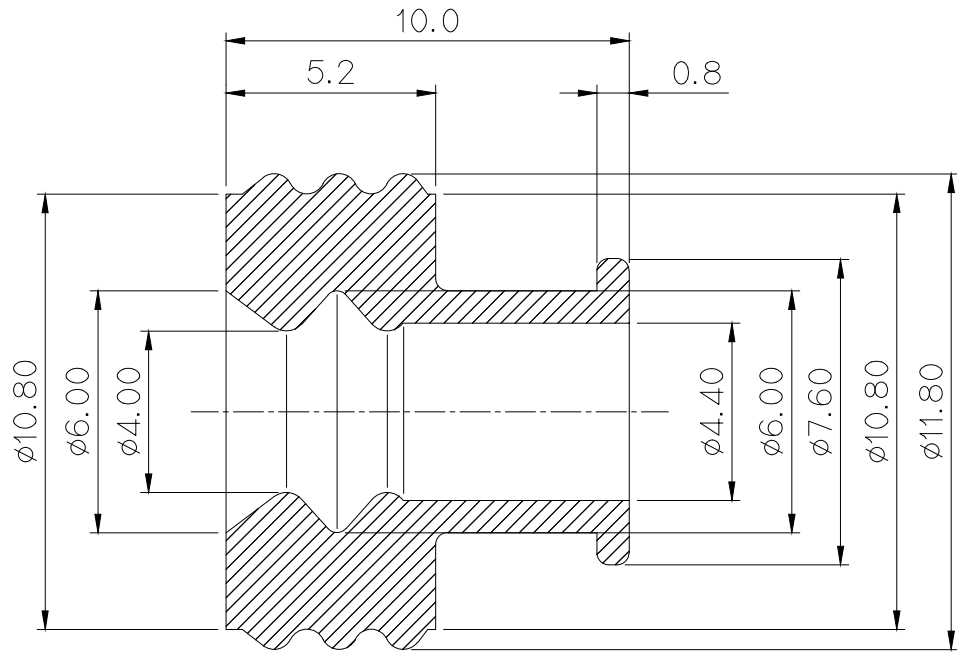

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- ⚠ 2. APPLICABLE WIRE SIZE : AVS 5.0 – AVS 8.0
APPLICABLE TERMINAL : ST730652, ST740655, ST730893, ST740668, ST730936
- ⚠ 3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (SILICONE RUBBER)							USED ON
0 TO 3	3 TO 6	6 TO 10	10 TO 18	18 TO 30	30 TO 50	50 TO 80	
±0.3	±0.4	±0.5	±0.6	±0.8	±1.0	±1.2	

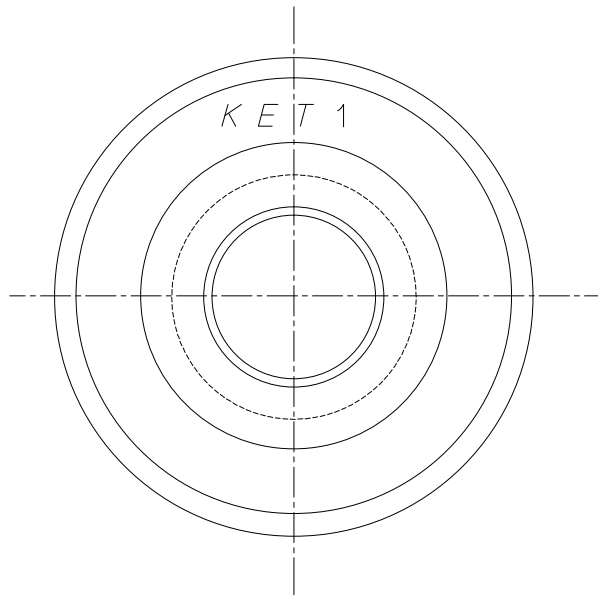

주 기

1. 제품기능상 유해한 BURR,변형 및 WELDLINE등이 없을것.
- ⚠ 2. 적용 WIRE SIZE: AVS 5.0 – AVS 8.0
적용 TERMINAL : ST730652, ST740655, ST730893, ST740668, ST730936
- ⚠ 3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



ISSUE MARK

						MATERIAL		SILICONE	 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
						FINISH		BLACK	
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
	ECO-1111-193 근거 도면 재작성 (도면 현실화)	AJH				'11.11.23			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	±0.2	SCALE 5/1	PART NO. MG 680954
DR.	YUN 95.7.25	CHK.				PART NAME			
CHK.		APP.				312II WIRE SEAL(L)			