
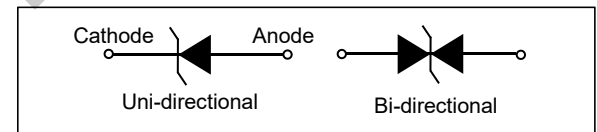


Features

- 3000W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate(duty cycle):0.01%
- Uni and Bidirectional unit
- Low leakage
- Very fast response time
- Excellent clamping capability
- RoHS compliant

Mechanical Data

- Lead: Solderable per MIL-STD-750, method 2026
- Case: Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Polarity: Color band denotes cathode end except Bipolar
- Mounting position: Any

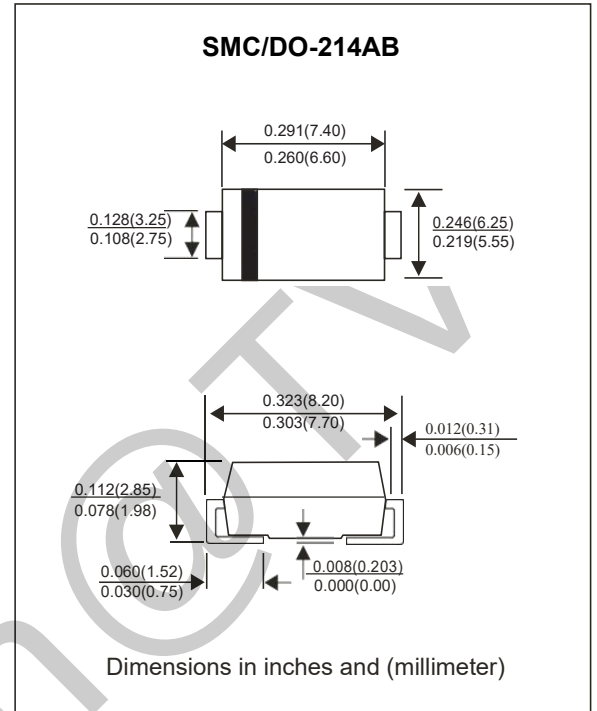

Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak power dissipation with a 10/1000 μ s waveform ⁽¹⁾	P_{PP}	3000	W
Peak pulse current with a 10/1000 μ s waveform ⁽¹⁾	I_{PP}	See Next Table	A
Power dissipation on infinite heatsink at $T_L = 75^{\circ}\text{C}$	P_D	6	W
Peak forward surge current, 8.3 ms single half sine-wave unidirectional only ⁽²⁾	I_{FSM}	300	A
Maximum instantaneous forward voltage at 100A for unidirectional only	V_F	3.5/5.0	V
Operating junction and storage temperature range	T_J, T_{STG}	- 55 to +150	$^{\circ}\text{C}$

Note:

(1)Non-repetitive current pulse per Fig.5 and derated above $T_A= 25^{\circ}\text{C}$ per Fig.1

(2)Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

Ratings and Characteristics Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1-Pulse Derating Curve

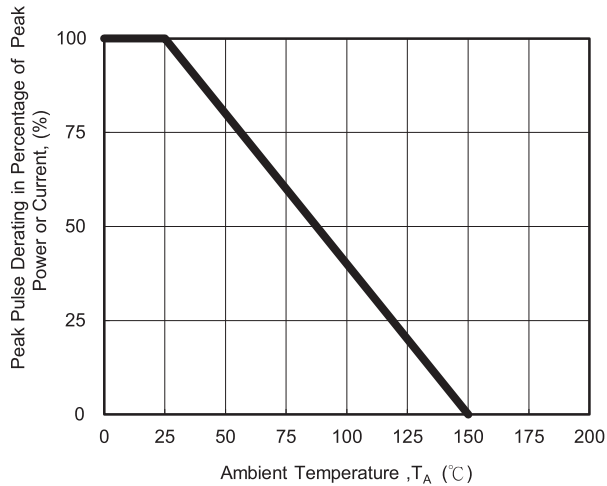


Fig.2-Maximum Non-Repetitive Surge Current

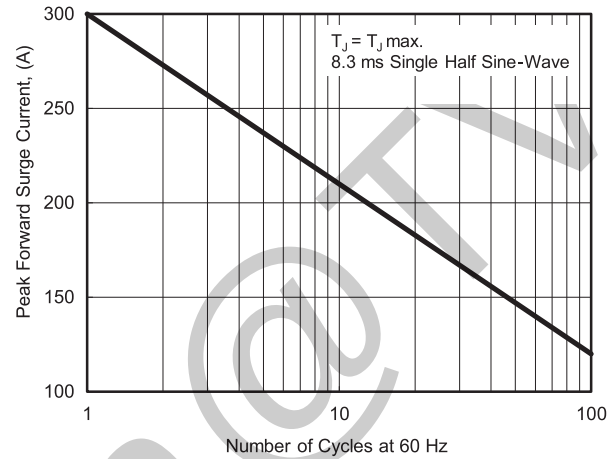


Fig.3-Steady State Power Derating Curve

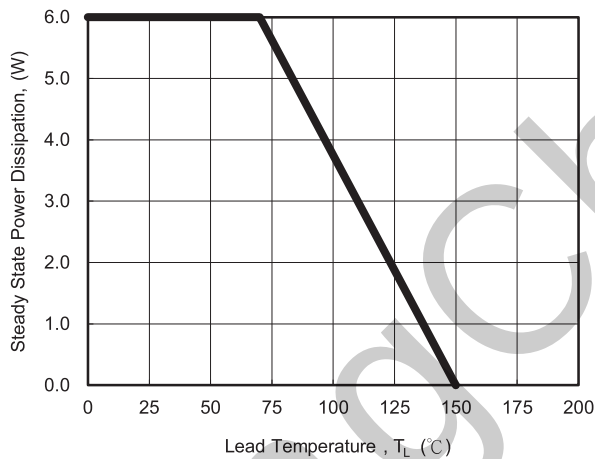


Fig.4-Peak Power Rating Curve

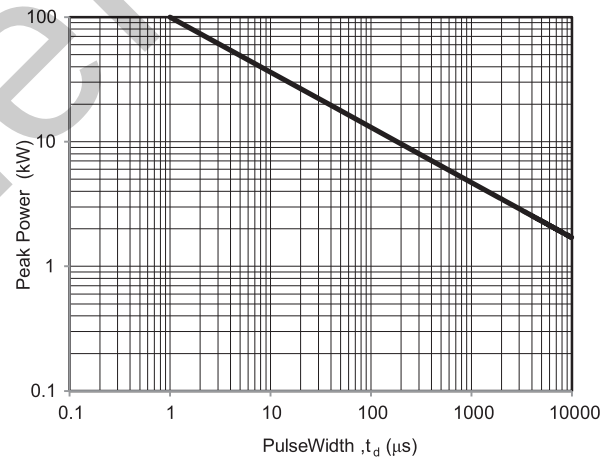


Fig.5-Pulse Waveform


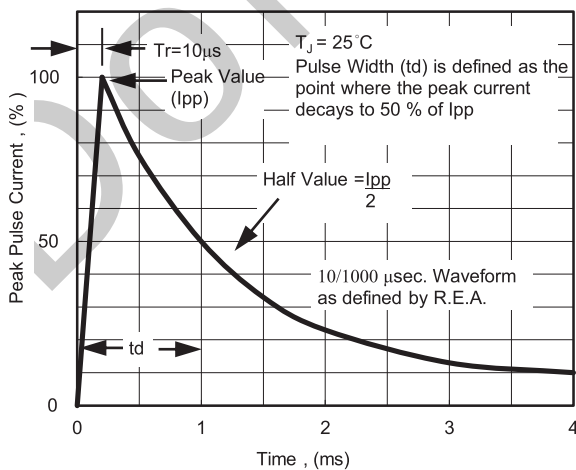


Fig.6-Typical Junction Capacitance

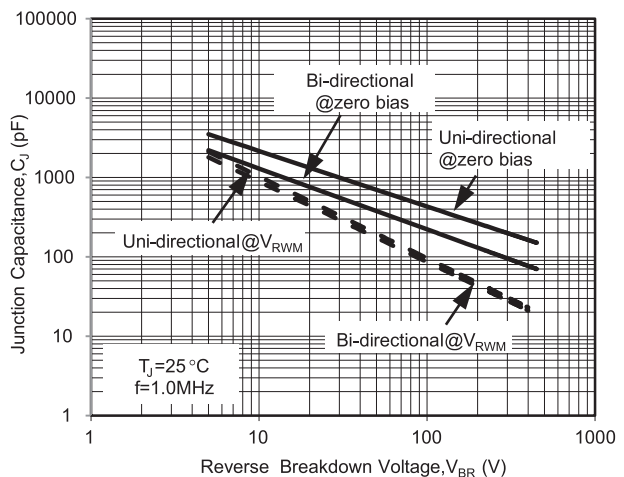

Electrical Characteristics($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Part Number		Marking Code		Reverse Stand-off Voltage	Breakdown Voltage Min. @I _T	Breakdown Voltage Max. @I _T	Test Current	Maximum Clamping Voltage @I _{PP}	Peak Pulse Current	Maximum Reverse Leakage @V _{RWM}
UNI	BI	UNI	BI	V _R (V)	V _B (V)	V _B (V)	I _T (mA)	V _C (V)	I _{PP} (A)	I _R (μ A)
SMDJ5.0A	SMDJ5.0CA	RDE	DDE	5	6.4	7	10	9.2	326.1	800
SMDJ6.0A	SMDJ6.0CA	RDG	DDG	6	6.67	7.37	10	10.3	291.3	800
SMDJ6.5A	SMDJ6.5CA	RDK	DDK	6.5	7.22	7.98	10	11.2	267.9	500
SMDJ7.0A	SMDJ7.0CA	PDM	DDM	7	7.78	8.6	10	12	250	200
SMDJ7.5A	SMDJ7.5CA	PDP	DDP	7.5	8.33	9.21	1	12.9	232.6	100
SMDJ8.0A	SMDJ8.0CA	PDR	DDR	8	8.89	9.83	1	13.6	220.6	50
SMDJ8.5A	SMDJ8.5CA	PDT	DDT	8.5	9.44	10.4	1	14.4	208.3	20
SMDJ9.0A	SMDJ9.0CA	PDV	DDV	9	10	11.1	1	15.4	194.8	10
SMDJ10A	SMDJ10CA	PDX	DDX	10	11.1	12.3	1	17	176.5	5
SMDJ11A	SMDJ11CA	PDZ	DDZ	11	12.2	13.5	1	18.2	164.8	2
SMDJ12A	SMDJ12CA	PEE	DEE	12	13.3	14.7	1	19.9	150.8	2
SMDJ13A	SMDJ13CA	PEG	DEG	13	14.4	15.9	1	21.5	139.5	2
SMDJ14A	SMDJ14CA	PEK	DEK	14	15.6	17.2	1	23.2	129.3	2
SMDJ15A	SMDJ15CA	PEM	DEM	15	16.7	18.5	1	24.4	123	2
SMDJ16A	SMDJ16CA	PEP	DEP	16	17.8	19.7	1	26	115.4	2
SMDJ17A	SMDJ17CA	PER	DER	17	18.9	20.9	1	27.6	108.7	2
SMDJ18A	SMDJ18CA	PET	DET	18	20	22.1	1	29.2	102.7	2
SMDJ20A	SMDJ20CA	PEV	DEV	20	22.2	24.5	1	32.4	92.6	2
SMDJ22A	SMDJ22CA	PEX	DEX	22	24.4	26.9	1	35.5	84.5	2
SMDJ24A	SMDJ24CA	PEZ	DEZ	24	26.7	29.5	1	38.9	77.1	2
SMDJ26A	SMDJ26CA	PFE	DFE	26	28.9	31.9	1	42.1	71.3	2
SMDJ28A	SMDJ28CA	PFG	DFG	28	31.1	34.4	1	45.4	66.1	2
SMDJ30A	SMDJ30CA	PFK	DFK	30	33.3	36.8	1	48.4	62	2
SMDJ33A	SMDJ33CA	PFM	DFM	33	36.7	40.6	1	53.3	56.3	2
SMDJ36A	SMDJ36CA	PFP	DFP	36	40	44.2	1	58.1	51.6	2
SMDJ40A	SMDJ40CA	PFR	DFR	40	44.4	49.1	1	64.5	46.5	2
SMDJ43A	SMDJ43CA	PFT	DFT	43	47.8	52.8	1	69.4	43.2	2
SMDJ45A	SMDJ45CA	PFV	DFV	45	50	55.3	1	72.7	41.3	2
SMDJ48A	SMDJ48CA	PFX	DFX	48	53.3	58.9	1	77.4	38.8	2
SMDJ51A	SMDJ51CA	PFZ	DFZ	51	56.7	62.7	1	82.4	36.4	2
SMDJ54A	SMDJ54CA	RGE	DGE	54	60	66.3	1	87.1	34.4	2
SMDJ58A	SMDJ58CA	PGG	DGG	58	64.4	71.2	1	93.6	32.1	2
SMDJ60A	SMDJ60CA	PGK	DGK	60	66.7	73.7	1	96.8	31	2
SMDJ64A	SMDJ64CA	PGM	DGM	64	71.1	78.6	1	103	29.1	2
SMDJ70A	SMDJ70CA	PGP	DGP	70	77.8	86	1	113	26.5	2
SMDJ75A	SMDJ75CA	PGR	DGR	75	83.3	92.1	1	121	24.8	2
SMDJ78A	SMDJ78CA	PGT	DGT	78	86.7	95.8	1	126	23.8	2
SMDJ85A	SMDJ85CA	PGV	DGV	85	94.4	104	1	137	21.9	2
SMDJ90A	SMDJ90CA	PGX	DGX	90	100	111	1	146	20.5	2
SMDJ100A	SMDJ100CA	PGZ	DGZ	100	111	123	1	162	18.5	2

Electrical Characteristics($T_A=25^{\circ}\text{C}$ unless otherwise noted)


Part Number		Marking Code		Reverse Stand-off Voltage	Breakdown Voltage Min. @ I_T	Breakdown Voltage Max. @ I_T	Test Current	Maximum Clamping Voltage @ I_{PP}	Peak Pulse Current	Maximum Reverse Leakage @ V_{RWM}
UNI	BI	UNI	BI	$V_R(V)$	$V_B(V)$	$V_B(V)$	$I_T(mA)$	$V_C(V)$	$I_{PP}(A)$	$I_R(\mu A)$
SMDJ110A	SMDJ110CA	PHE	DHE	110	122	135	1	177	16.9	2
SMDJ120A	SMDJ120CA	PHG	DHG	120	133	147	1	193	15.5	2
SMDJ130A	SMDJ130CA	PHK	DHK	130	144	159	1	209	14.4	2
SMDJ150A	SMDJ150CA	PHM	DHM	150	167	185	1	243	12.3	2
SMDJ160A	SMDJ160CA	PHP	DHP	160	178	197	1	259	11.6	2
SMDJ170A	SMDJ170CA	PHR	DHR	170	189	209	1	275	10.9	2
SMDJ180A	SMDJ180CA	PHT	DHT	180	201	222	1	292	10.3	2
SMDJ190A	SMDJ190CA	PHU	DHU	190	209	243	1	308	9.7	2
SMDJ200A	SMDJ200CA	PHV	DHV	200	224	247	1	324	9.3	2
SMDJ210A	SMDJ210CA	PHW	DHW	210	231	269	1	340	8.8	2
SMDJ220A	SMDJ220CA	PKE	DKE	220	246	272	1	356	8.4	2

DO-214AB(SMC) Package Dimension

Item	Millimeters		Inches	
	Min.	Max.	Min.	Max.
L	6.60	7.11	0.260	0.280
D	5.59	6.22	0.220	0.245
D1	2.90	3.20	0.114	0.126
T	7.75	8.13	0.305	0.320
T1	0.76	1.52	0.030	0.060
d	-	0.20	-	0.008
s	2.06	2.62	0.079	0.103
t	0.152	0.31	0.006	0.012


NOTES:

1. Dimensions are exclusive of mold flash and metal burrs
2. Cathode Band is only applicable to the unidirectional package

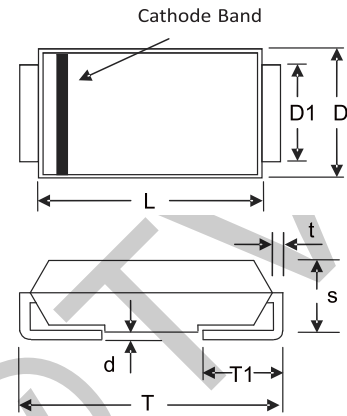


RECOMMENDED PAD LAYOUT DIMENSIONS

Item	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	3.300	-	0.129	-
B	2.400	-	0.094	-
C	-	4.200	-	0.165
D	2.400	-	0.094	-
E	8.13 REF		0.320 REF	



Tape and Reel Specification

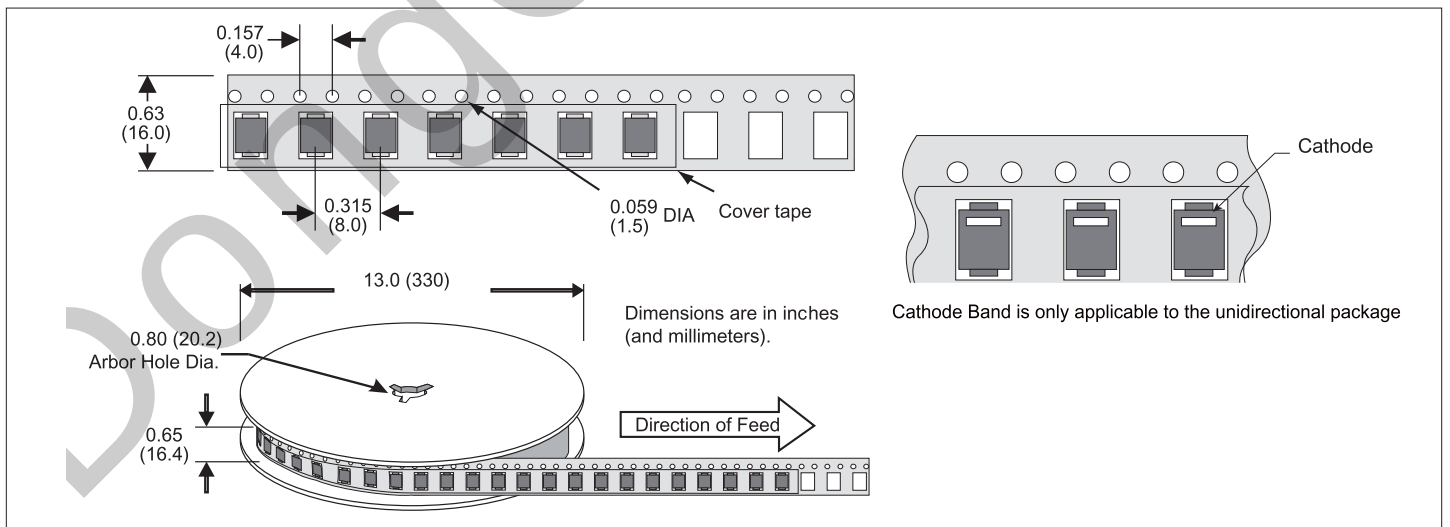

ORDERING INFORMATION

Part Number	Component Package	QTY/Reel	Reel Size
SMDJxx(C)A	DO-214AB(SMC)	3000PCS	13"

Important Notice

DongChen Electronics reserves the right to make changes without further notice to any products herein.

DongChen Electronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does DongChen Electronics assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.

“Typical” parameters which may be provided in DongChen Electronics data sheets and/or specifications can and do vary in different applications and actual performance may vary over time.

All operating parameters, including “Typicals,” must be validated for each customer application by the customer’s technical experts.

DongChen Electronics does not convey any license under its patent rights nor the rights of others.

The products listed in this document are designed to be used with ordinary electronic equipment or devices.

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers, and other safety devices), please be sure to consult with our sales representative in advance.

Head Office

Contact Information:

DongChen Electronics Co.,Ltd.

Address: 2F., No.407, Sec. 2, Longgang Rd.,Zhongli Dist.,
Taoyuan City 32097, Taiwan (R.O.C.)

Tel: 03-284-1808

Fax: 03-284-1404

Mail:dc@dongchen.com.tw

Web:www.dongchen.com.tw