

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: LCP 无卤+30%G.F UL94V-0, 颜色:黑色.

Housing:LCP HF+30%G.F UL94V-0, Color:Black

排针胶芯: PA6T 金发无卤+30%G.F UL94V-0, 颜色:黑色.

Housing:PA6T HF+30%G.F UL94V-0, Color:Black

四方针: 黄铜, 镍底, 表面镀金足0.6u"

Contact:Brass, 0.6u" Min GOLD PLATING OVER ALL

NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电压: 125V AC/DC

Rated Voltage:125V AC/DC

额定电流: 2 AMP

Raring Current:2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V/分钟.


Withstanding Voltage:AC 500V/Minute.

温度范围: -40° C to+105° C



Temperture Range: -40° C to+105° C

The soldering Temperature: 260° C for 5S

for wave soldering

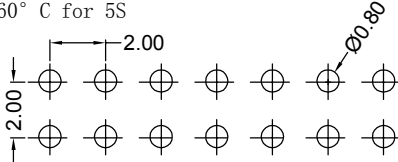


Recommended P.C.B LAYOUT
General Tolerance±0.05

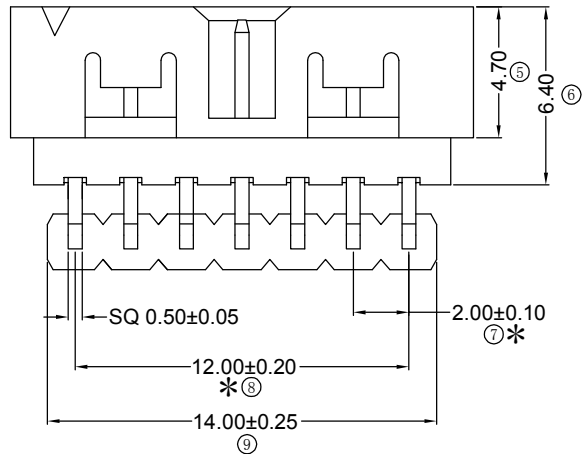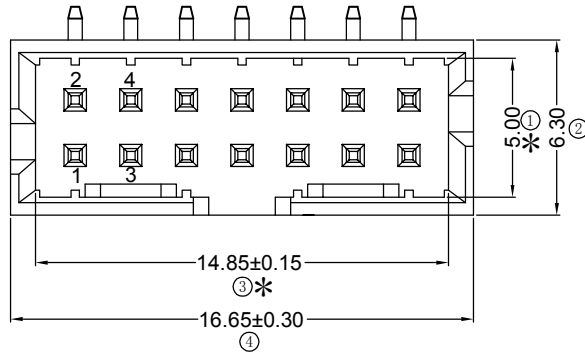

Ordering Information

B264-2 14 A0 D R B F 2

NO. OF PINS	Contact Plating	INSULATOR MATERIAL:	Black	PAQING
6-68P	Full Gold	60=0.8U"	Grey427	PE Bag
	A0=G/F	B1=1U"	PA6T	Grey413
	A1=1u"	B2=1.5U"	PA6T	White
	A2=1.5u"	B3=2U"	LCP	Blue
	A3=2u"	B4=3U"		Tube+CAP
	A4=3u"	B5=5U"		Tray
	A5=5u"	B6=10U"		
	A6=10u"	B7=15U"		
	A7=15u"	B8=20U"		
	A8=20u"	B9=30U"		
	A9=30u"			
	S1=Gr di nary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

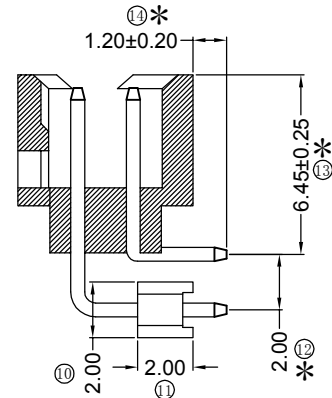

RoHS
COMPLIANT

客编:

注意事项

- 带序号为必检尺寸, 带*为重点检验尺寸
- 产品表面光滑, 不可有灰尘, 毛刺等异物。

				OPERATION		SCALE		Fit	Yxcon www.yxcon.com 广东宇熙新能源技术有限公司 Guangdong Yuxi New Energy Technology Co., Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	李官森2024.04.07	PART NO	B264-214A0DRBF2
				X.XXX	±0.10						
A0	2024.04.07	/	新版发行	Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.0英仕高年+2.0成型P排针 14P L=9.2(1.20)/13.2 带窗口无至 90° LCP无卤 排针6T无卤 金足0.6u镍30-45u 放大5倍全检 卷装
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	