
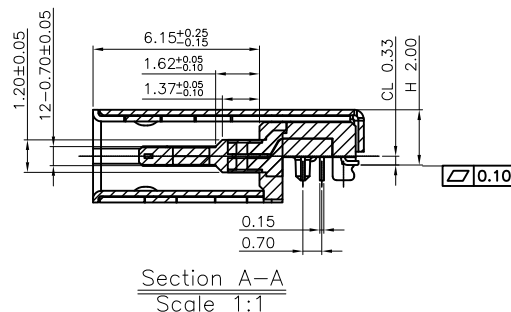
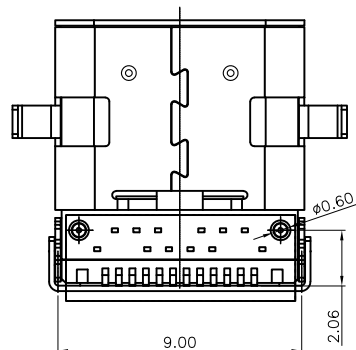

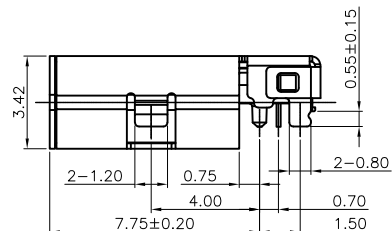
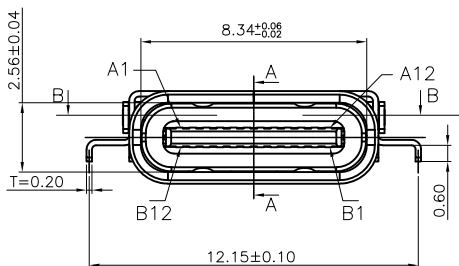


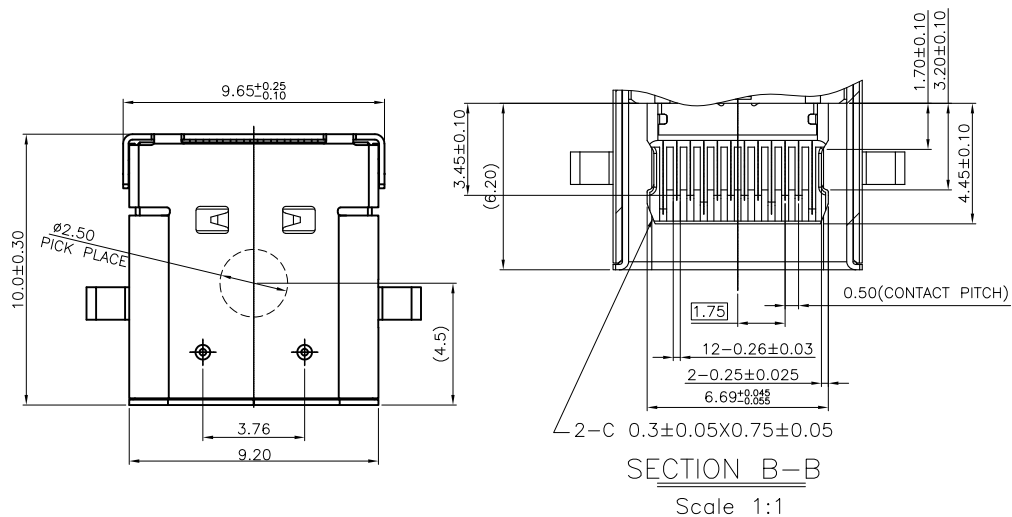

NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0

CONTACT: COPPER ALLOY.

PLATED GOLD ON CONTACT AREA,
G/F GOLD ON SOLDER AREA,
50u" NICKEL PLATING OVER ALL.OUTER SHELL: SUS304-H, T=0.20±0.03mm
50u" NICKEL SOLDER AREA TAIL

INNER SHELL: SUS304, T=0.20±0.03mm

EMI SHILD: SUS304=0.12±0.03mm

LATCH: SUS301, T=0.15±0.03mm

2.MECHANICAL:

INSERTION: 5~20N.

EXTRACTION: 8~20N.

DURABILITY: 10000 CYCLES

3.ELECTRICAL:

CURRENT: 5A MAX FOR VBUS;

1.25A FOR GND, 0.25A FOR OTHER OTHER.

VOLTAGE: 20VDC MAX

WITHSTANDING VOLTAGE: 100V AC.

CONTACT RESISTANCE: 40mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL

TEMPERATURE RANGE -40°C ~ +85°C



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

USB TYPE C 母座24P 沉板双壳DIP+SMT L10.0

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYCW771-USB24-100B

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23



DRAW NO:

HYC-2607071629

SHEET NO.


1 OF 1

1	OF	1
---	----	---

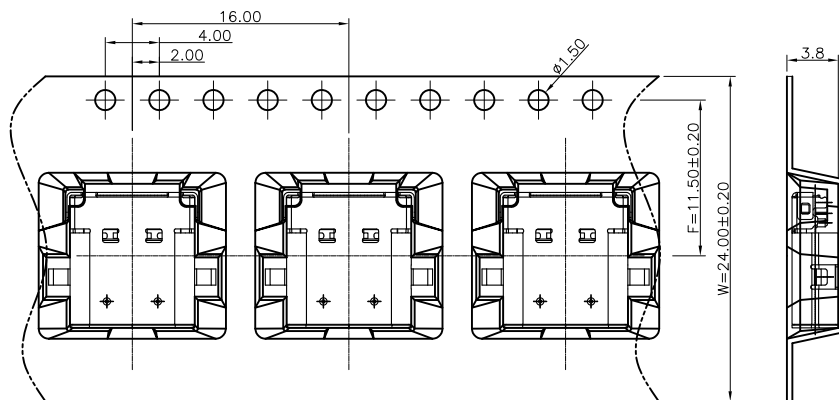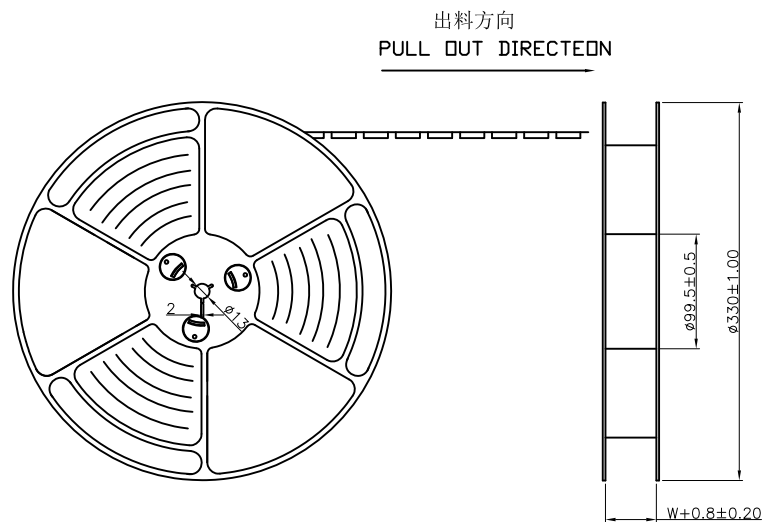

NOTES

1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

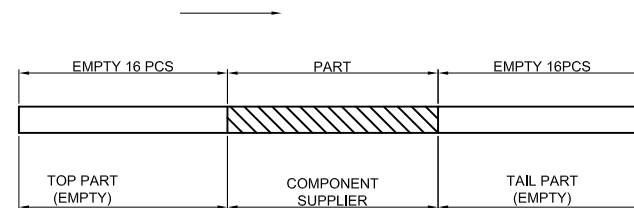


2. 出貨運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30
X.XX ± 0.25
X.XXX ± 0.15
X.' $\pm 2'$ X.X' $\pm 0.5'$



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

包装图

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱敏

DATE :

2014-02-23


PART NO.

MOLD NO.

DRAW NO:

SHEET NO.

1 OF 1

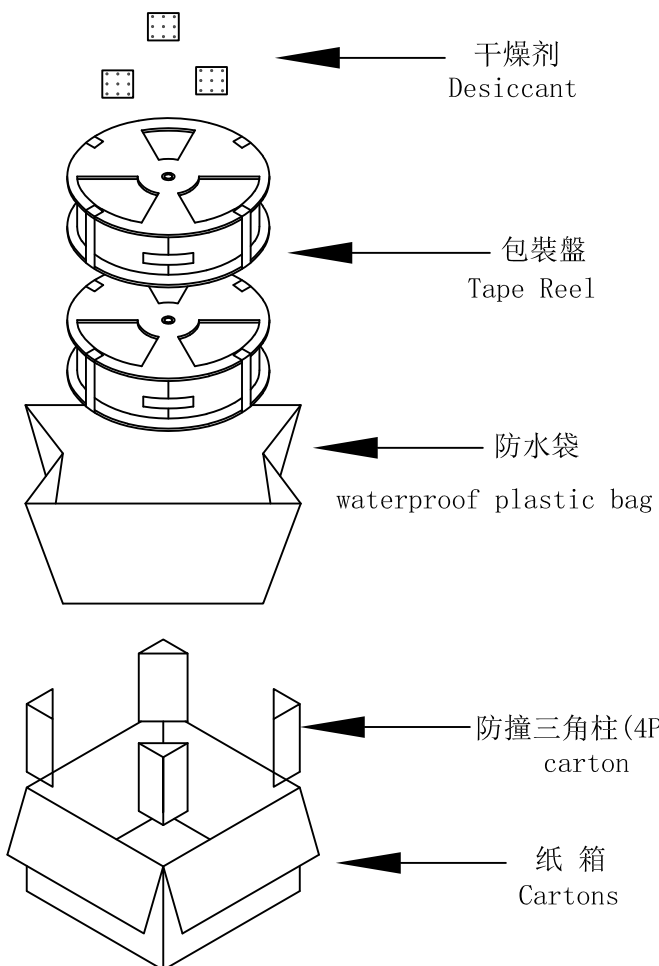


產品料號 (PRODUCT No.)	包裝容量 (PACKING CAPACITY)			重量 WEIGHT (Kg)		
	PCS/REEL	REELS/CARTON	PCS/CARTON	N.W./PCS	N.W./BOX	G.W./BOX
	1000	10	10000	0.78g	7.8Kg	

Label pasting location (facing the back of the circular hole on the roll)

标签粘贴处 (朝卷帶圓孔反面)

Location of label sticking (label

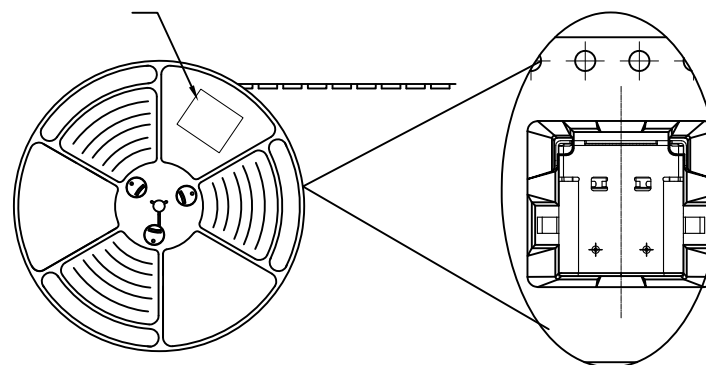

NOTE:

1. 每捲包裝數量及每箱裝箱數量如左下表格。

Packing q'ty of each reel & carton as below table shown.

2. 以上膠帶覆蓋下包裝帶經包裝機冷封包裝

Use cover tape to cover and hot melt machine to seal up.

3. 將裝滿產品的卷盤放入紙箱并以膠帶封口

Put reels in the carton and use adhesive tape to seal up.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1