
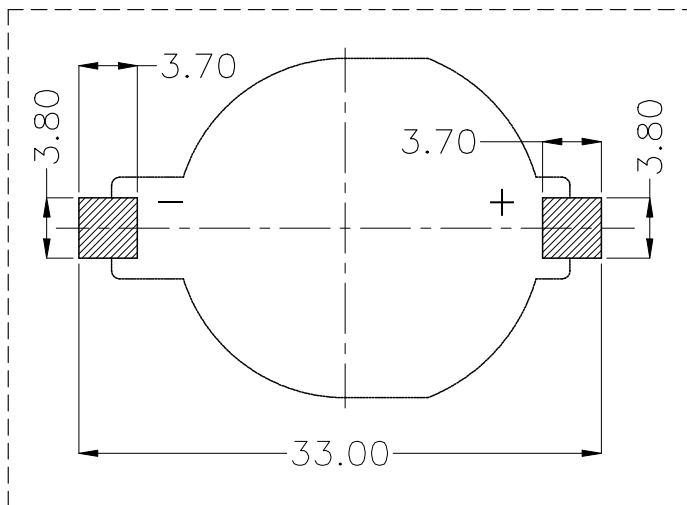
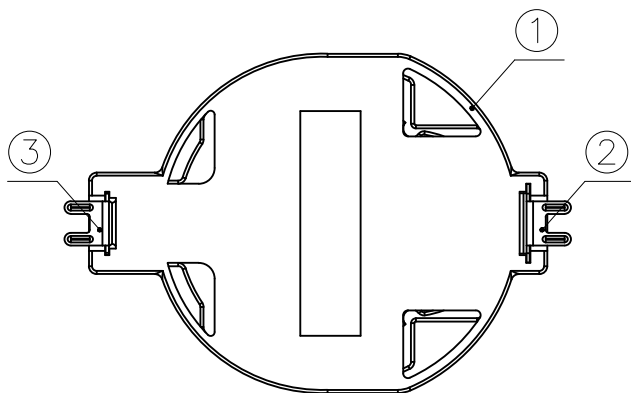
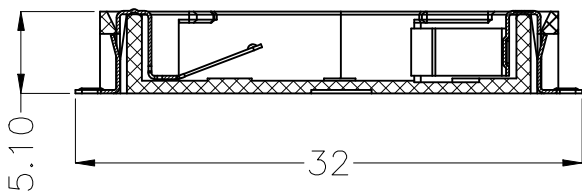



ROHS

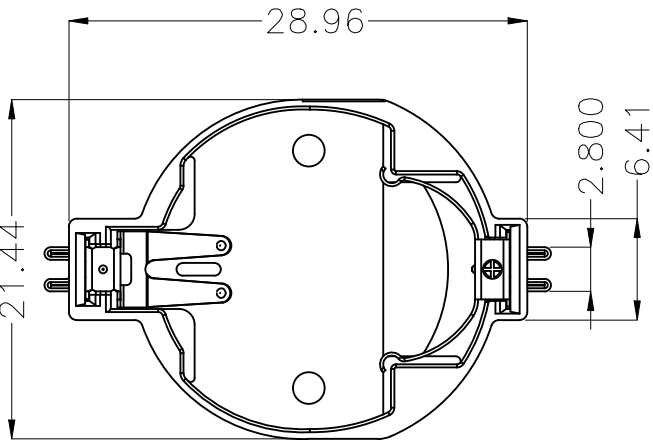

PCB Layout Diagram
Top View

NOTE:

1.MATERIAL:

a.HOUSING:PPA 94HB BROWN

b.CONTACT:PHOSPHOR BRONZE

(SURFACE PLATING: Au-PLATING)

SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 50 MILLIOHMS MAX

b.INSULATION RESISTANCE: 100 MEGA OHMS MIN


c.DIELECTNIC VOLTAGE: 500V AC ONE MINUTE

d.OPERATING TEMPERATURE: -25°C~+85°C

3.PACKAGING:



a.PLASTIC TRAY(PLEASE REFER TO PAGE TWO FOR DETAILS)

b.TAPE OR REEL(PLEASE REFER TO PAGE THREE FOR DETAILS)


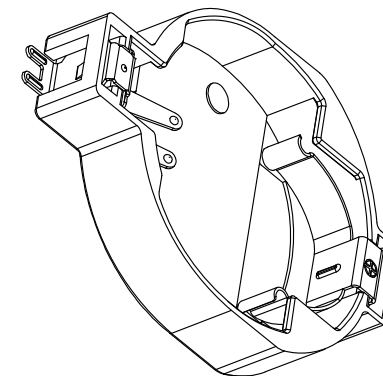


3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPA 94HB	BROWN
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
COSTOMER DRAWING			LAILIAN 深圳市莱联电子有限公司	
DRAWING			SHENZHEN LAILIAN ELECTRONICS CO.,LTD	
CHECK				
APPROVAL				
TOLERANCES ARE			TITLE	电池座适用电池规格CR2032
30-150	±0.35	ANGLE	REV.	A
10-30	±0.2		PART NO.	LAIL-CR2032-SMT-B03-2AA
5-10	±0.15		UNITS	mm
0-5	±0.1		DWG.NO.	Projection
			±3°	


REV.	ECN NO.	DESCRIPTION	DRAW	DATE

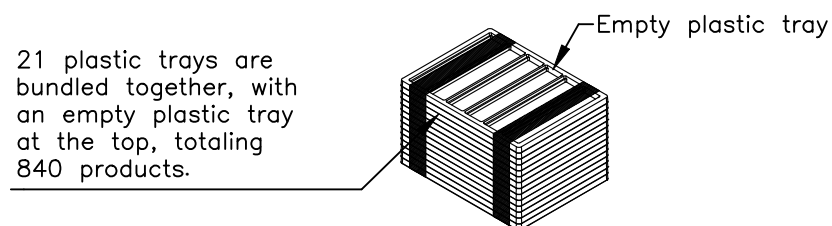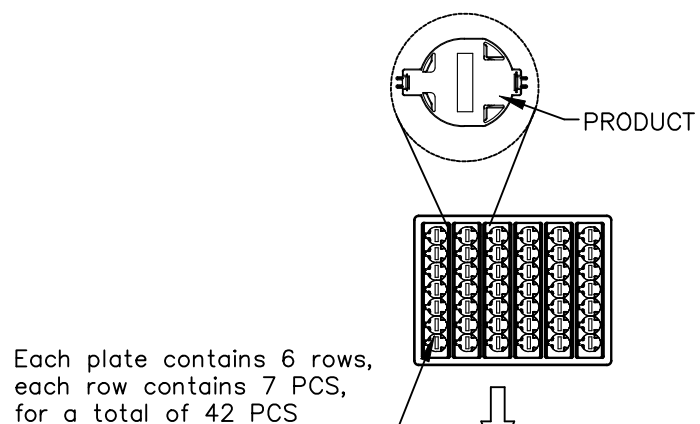


Mini carton box=840PCS/box



Seal the top and bottom of the outer box with adhesive tape to form the character "工".

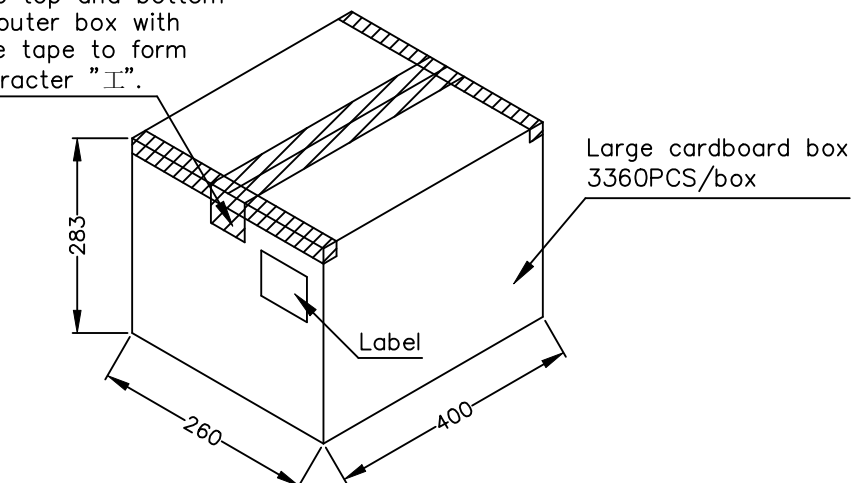

desiccant 3PCS

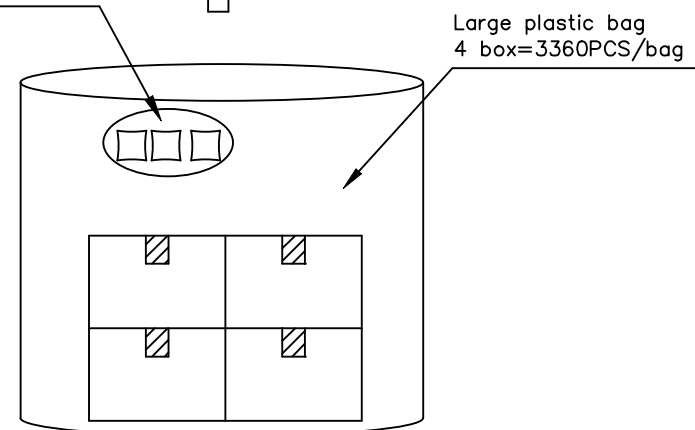


Packaging information:

1. Each plate contains 6 rows, each row contains 7 PCS, for a total of 42 PCS;
2. 21 plastic trays are bundled together, with an empty plastic tray at the top, totaling 840 products;
3. Each large bag contains 4 small boxes, totaling 3360 products;
4. Each outer box contains a large plastic bag, totaling 3360 products
5. Seal the top and bottom of the outer box with adhesive tape to form the character "工";


COSTOMER DRAWING		LAILIAN 深圳市莱联电子有限公司 SHENZHEN LAILIAN ELECTRONICS CO.,LTD			
DRAWING					
CHECK					
APPROVAL					
TOLERANCES ARE		TITLE	电池座适用电池规格CR2032	REV.	A
30-150	±0.35	PART NO.	LAIL-CR2032-SMT-B03-2AA	UNITS	mm
10-30	±0.2				
5-10	±0.15				
0-5	±0.1				
ANGLE		DWG.NO.		Projection	
±3°					

REV.	ECN NO.	DESCRIPTION	DRAW	DATE

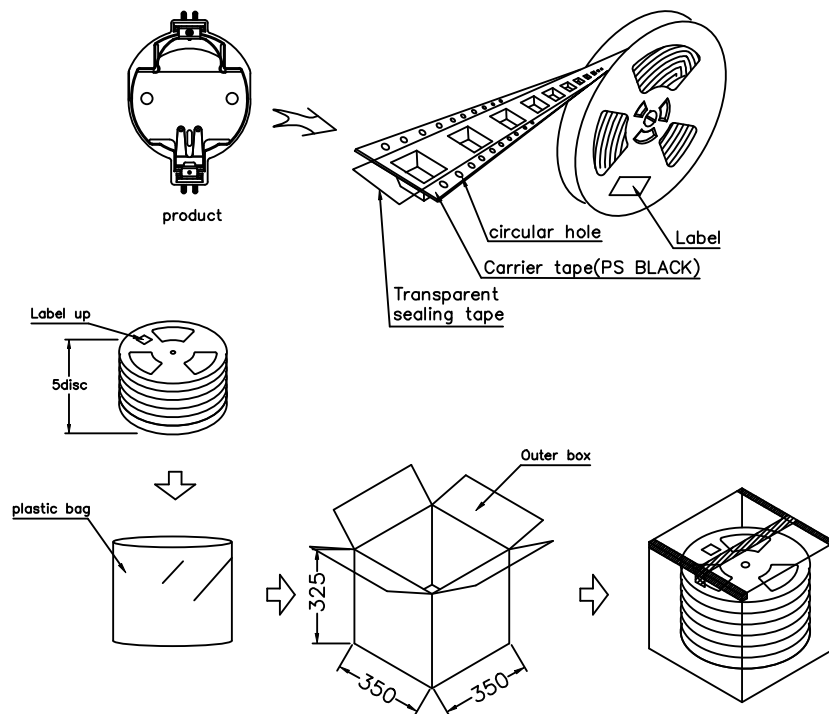

Packaging information:

1. Each roll contains 350 products, with relevant labels attached to the outside of the roll;
2. Put every 5 rolls in a plastic bag;
3. Each outer box contains 5 plates, with a total of 1750 products;
4. Seal the top and bottom of the outer box with adhesive tape to form the character "工";
5. Battery holder packaging material BS-2032-10 SMT roll pack(BS-2032-10-01-R).

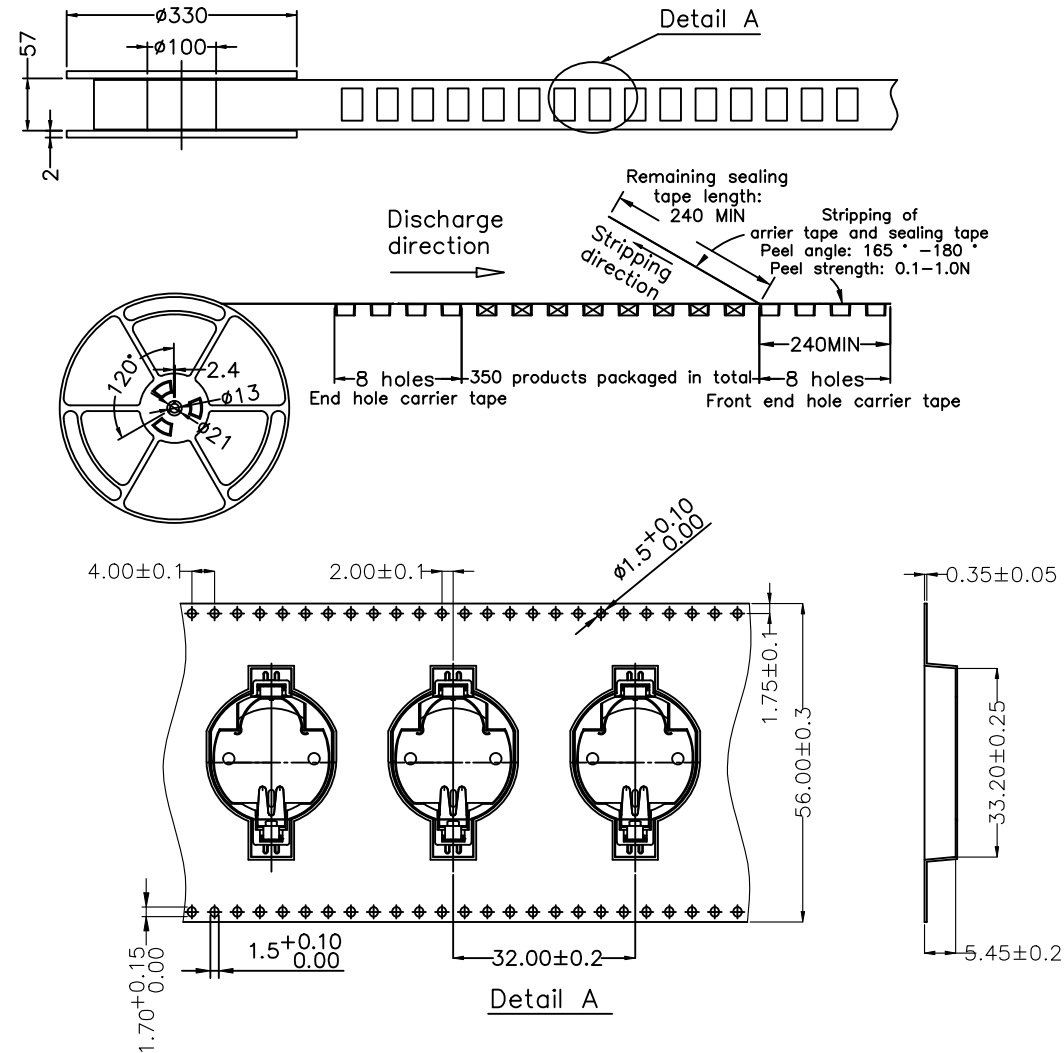

COSTOMER DRAWING			LAILIAN 深圳市莱联电子有限公司 SHENZHEN LAILIAN ELECTRONICS CO., LTD					
DRAWING								
CHECK								
APPROVAL								
TOLERANCES ARE			TITLE	电池座适用电池规格CR2032	REV.	A		
30-150	±0.35	ANGLE	PART NO.	LAIL-CR2032-SMT-B03-2AA	UNITS	mm		
10-30	±0.2							
5-10	±0.15							
0-5	±0.1							
			DWG.NO.				Projection	
±3°								