
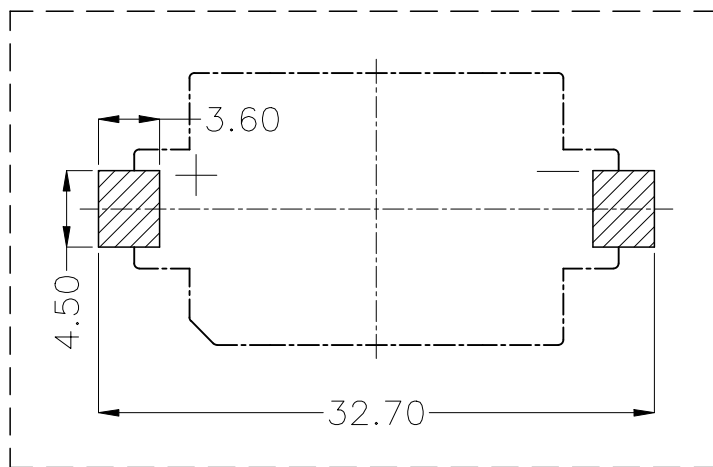
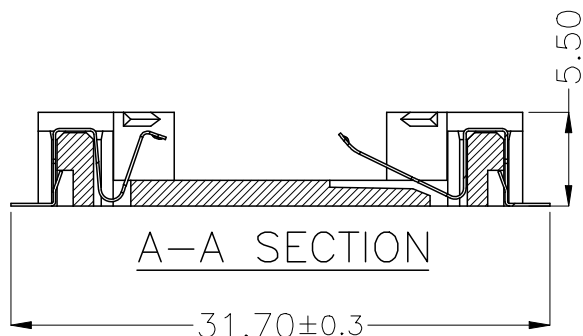



ROHS

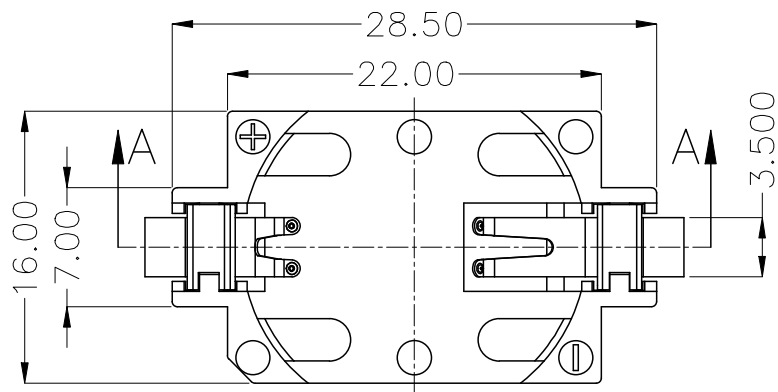

PCB Layout Diagram
Top View

REV.	ECN NO.	DESCRIPTION	DRAW	DATE

1.MATERIAL:

- a.HOUSING:LCP UL94V-0
b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING: Au-Plating)


SEE ORDERING INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 100 MEGA OHMS MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE MINUTE
d.OPERATING TEMPERATURE: -25°C~ +85°C



3.PACKAGING:

- a.PLASTIC TRAY(PLEASE REFER TO PAGE TWO FOR DETAILS)
b.TAPE OR REEL(PLEASE REFER TO PAGE THREE FOR DETAILS)

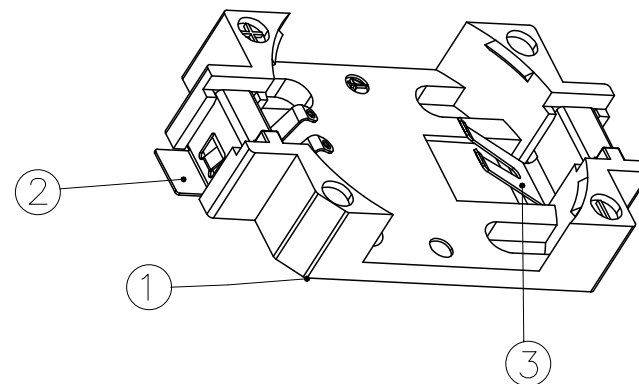

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.15	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.15	Gold Plating and Ni Under-Plating
1	HOUSING	1	LCP UL94 V-0	WHITE
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
COSTOMER DRAWING			深圳市莱联电子有限公司	
DRAWING			SHENZHEN LAILIAN ELECTRONICS CO.,LTD	
CHECK				
APPROVAL				
TOLERANCES ARE			TITLE	电池座适用电池规格CR2032
30-150	±0.35	ANGLE	REV.	A
10-30	±0.2		PART NO.	LAIL-CR2032-SMT-B02-4AA
5-10	±0.15		UNITS	mm
0-5	±0.1		DWG.NO.	
			Projection	

REV.	ECN NO.	DESCRIPTION	DRAW	DATE

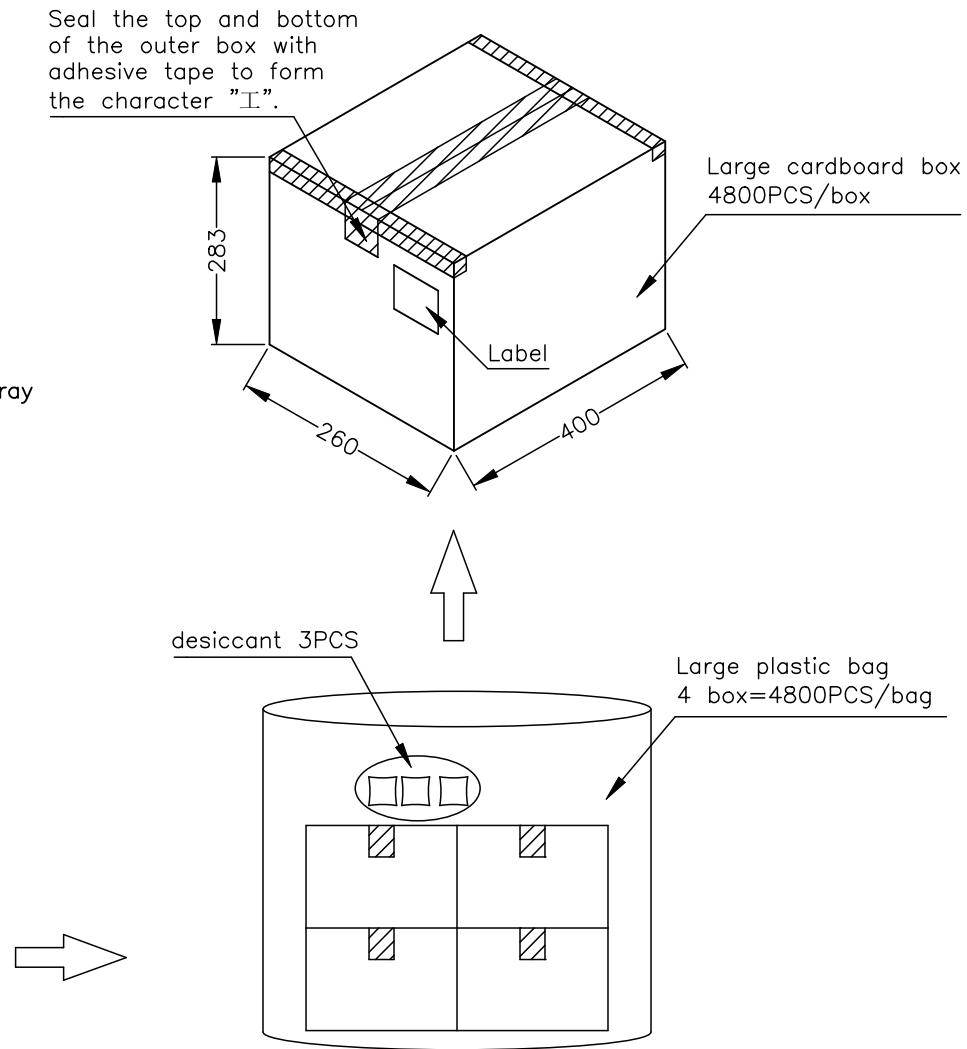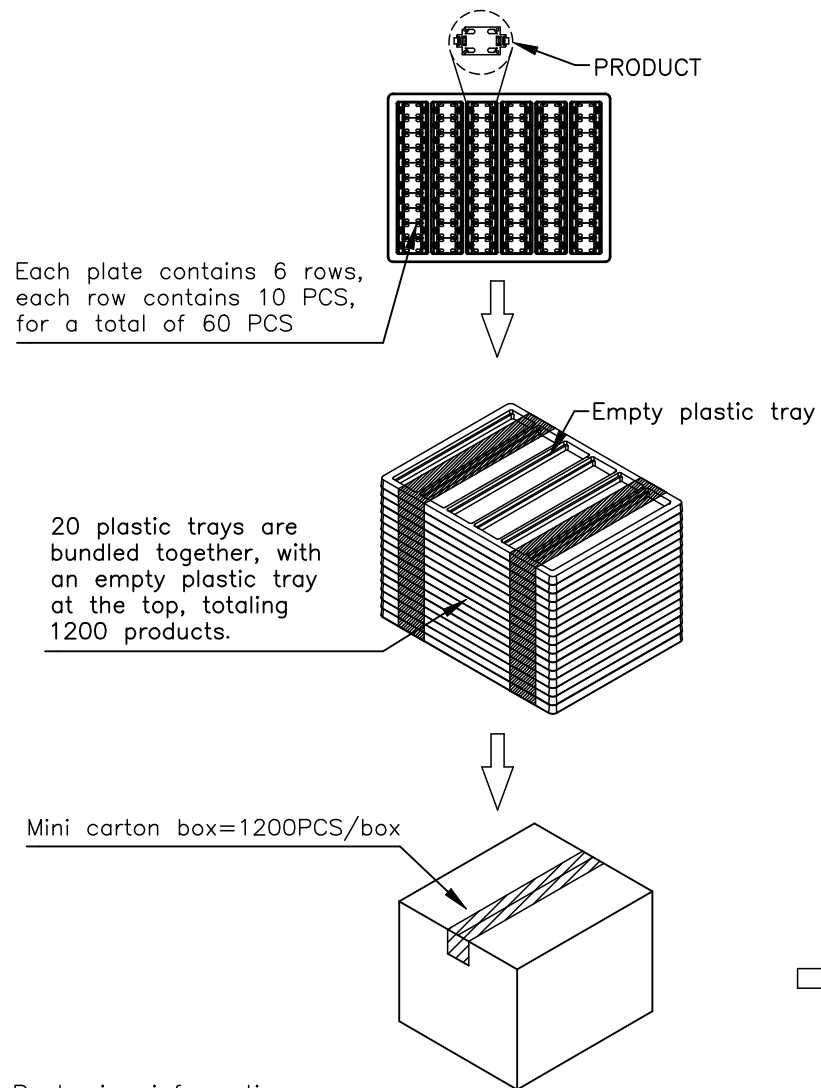


Packaging information:

1. Each plate contains 6 rows, each row contains 10 PCS, for a total of 60 PCS;
2. 21 plastic trays are bundled together, with an empty plastic tray at the top, totaling 1200 products;
3. Each small cardboard box contains 20 plastic trays products, totaling 1200 products;
4. Each outer box contains 4 small paper boxes, totaling 4800 products
5. Seal the top and bottom of the outer box with adhesive tape to form the character "工";

COSTOMTER DRAWING			深圳市莱联电子有限公司			
DRAWING			SHENZHEN LAILIAN ELECTRONICS CO., LTD			
CHECK						
APPROVAL						
TOLERANCES ARE			TITLE	电池座适用电池规格CR2032	REV.	A
30-150	±0.35	ANGLE	PART NO.	LAIL-CR2032-SMT-B02-4AA	UNITS	mm
10-30	±0.2					
5-10	±0.15					
0-5	±0.1					
			DWG.NO.		Projection	


ROHS

REV.	ECN NO.	DESCRIPTION	DRAW	DATE

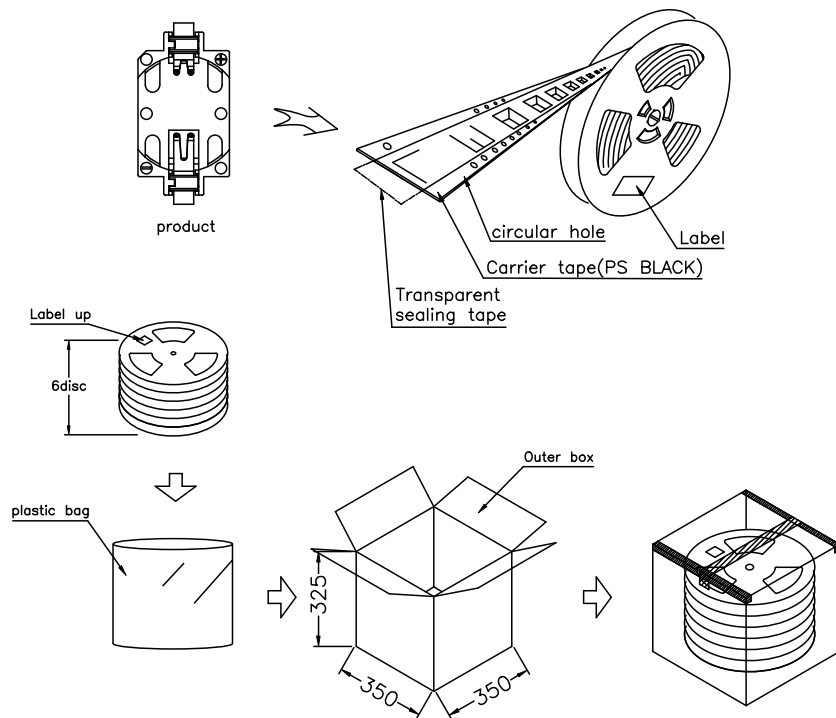

Packaging information:

1. Each roll contains 500 products, with relevant labels attached to the outside of the roll;
2. Put every 6 rolls in a plastic bag;
3. Each outer box contains 6 plates, with a total of 3000 products;
4. Seal the top and bottom of the outer box with adhesive tape to form the character "工";
5. Battery holder packaging material BS-2032-6 SMT roll pack(BS-6-01-R).

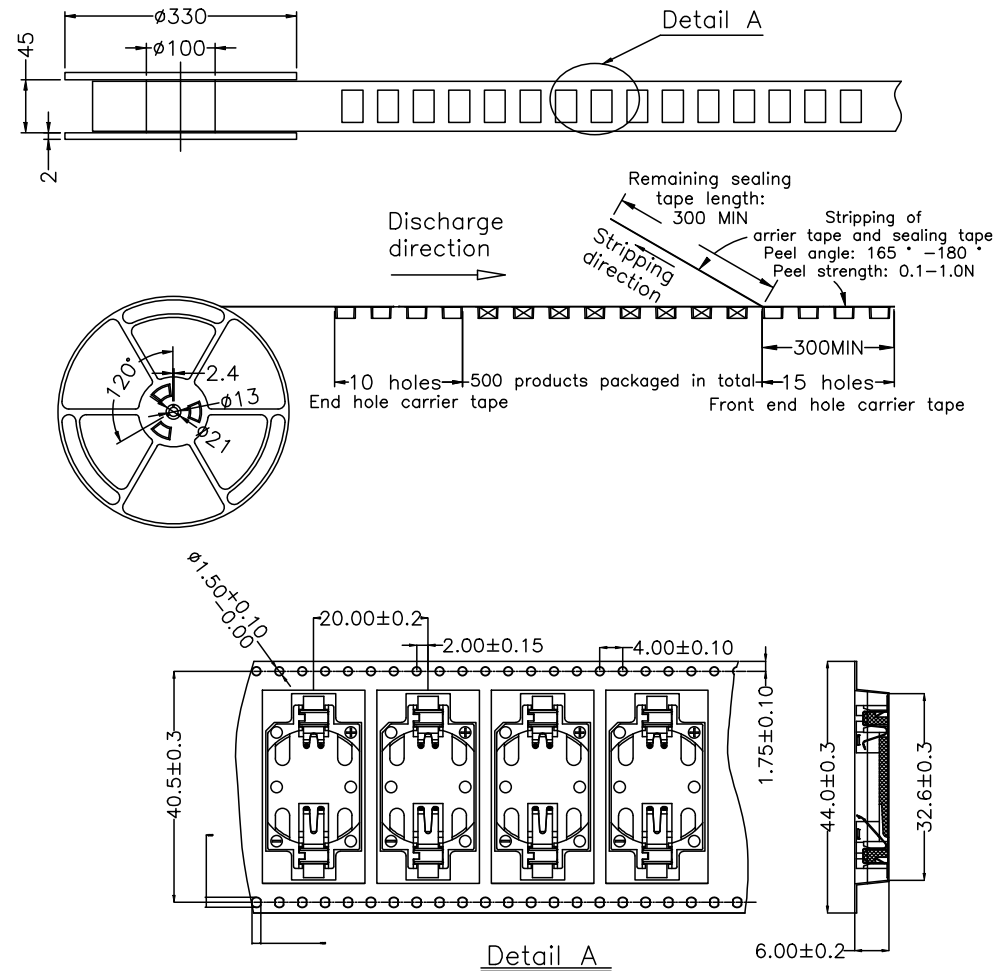

COSTOMTER DRAWING			深圳市莱联电子有限公司				
DRAWING			SHENZHEN LAILIAN ELECTRONICS CO., LTD				
CHECK							
APPROVAL							
TOLERANCES ARE			TITLE		电池座适用电池规格CR2032	REV.	A
30-150	±0.35	ANGLE	PART NO.	LAIL-CR2032-SMT-B02-4AA	UNITS	mm	
10-30	±0.2						
5-10	±0.15						
0-5	±0.1						
±3°			DWG.NO.		Projection		