BCD80N360M2

N-Channel Silicon Carbide Power MOSFET

800 V, 10.3 A, 360 mΩ

bestirpower

Features

- Revolutionary semiconductor material Silicon Carbide
- High blocking voltage with low on-resistance
- High-speed switching with very low switching losses
- High-speed and high robust intrinsic body diode

$BV_{DSS, Tc=25℃}$	$I_{D, Tc=25℃}$	$R_{DS(on),typ}$	$Q_{g,typ}$
800 V	10.3 A	360 mΩ	20.7nC

Applications

- LED driver
- PD charger
- PC adapter
- Air-conditioning
- E-bike charger





Absolute Maximum Ratings (T_J = 25℃ unless otherwise noted)

Symbol	Parameter		Value	Unit
V_{DSS}	Drain to Source Voltage		800	V
V_{GS}	Gate to Source Voltage (DC)		-10/22	V
V_{GSop}	Recommended Operation Value		0/15	V
I_D	Drain Current	V_{GS} = 15 V, (T_C = 25℃)	10.3	A
		V_{GS} = 15 V,(T_C = 100℃)	7.3	
I_{DM}	Drain Current	Pulsed、	22	A
P_D	Power Dissipation	(T_C = 25℃)	61	W
		Derate Above 25℃	0.41	W/℃
T_J, T_{STG}	Operating and Storage Temperature Range		-55 to 175	℃

Thermal Characteristics

Symbol	Parameter	Value	Unit
R_{thj-C}	MOSFET/Body Diode Junction-Case Thermal Resistance	2.46	℃/W
Tsold	Soldering temperature, wave soldering only allowed at leads	260	℃

Electrical Characteristics (T_J = 25℃ unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Off Characteristics						
BV_{DSS}	Drain to Source Breakdown Voltage	I_D = 100μA	800	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 800 V, V_{GS} = 0 V	-	2.57	20	μA
I_{GSS}	Gate-Source Leakage Current	V_{DS} = 0 V, V_{GS} = + 22 V	-	100	+250	nA
I_{SGS}	Source-Gate Leakage Current	V_{DS}= 0 V, V_{GS}= - 10 V	-250	-51	-	nA
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS} = V_{DS}, I_D = 10 mA, T_J = 25˚C	-	3.32	-	V
$R_{DS(on)}$	Static Drain to Source On Resistance	V_{GS} = 15V, I_D = 7 A, T_J = 25℃	-	474	-	mΩ
		V_{GS} = 15 V, I_D = 7 A, T_J = 175℃	-	410	-	
		V_{GS} = 18 V, I_D = 7 A, T_J = 25℃	-	357		
		V_{GS} = 18 V, I_D = 7 A, T_J = 175℃	-	340	-	
Dynamic Characteristics						
C_{iss}	Input Capacitance	V_{GS} = 0V, V_{DS} = 650 V, f = 1MHz	-	375	-	pF
C_{oss}	Output Capacitance		-	38	-	
C_{rss}	Reverse Capacitance		-	1.9	-	
$Q_{g(tot)}$	Total Gate Charge	V_{DS} = 600 V, I_D = 5 A, V_{GS} = 0V / 15 V	-	20.7	-	nC
Q_{gs}	Gate to Source Charge		-	7.2	-	
Q_{gd}	Gate to Drain "Miller" Charge		-	15	-	
R_G	Internal Gate Resistance	f = 1MHz,V_{AC} = 25 mV	-	21.5	-	Ω
Switching Characteristics						
$t_{d(on)}$	Turn-On Delay Time	V_{GS} = 0/15 V, L=600 μH V_{DS} = 600 V, I_D = 5 A, $R_{G(on)}$ = 2.2Ω, $R_{G(off)}$ = 2.2Ω	-	8.2	-	ns
t_r	Turn-On Rise Time		-	14.5	-	
$t_{d(off)}$	Turn-Off Delay Time		-	8.5	-	
t_f	Turn-Off Fall Time		-	26.7	-	
E_{on}	Turn-On Switching Energy		-	94.6	-	μJ
E_{off}	Turn-Off Switching Energy		-	4.5	-	
Source-Drain Diode Characteristics						
V_{SD}	Body Diode Forward Voltage	V_{GS} = 0 V, I_{SD} = 3.5A,T_C = 25˚C	-	2.46	-	V
		V_{GS} = 0 V, I_{SD} =3.5A,T_C = 175˚C	-	2.36	-	V
t_{rr}	Reverse Recovery Time	V_{DS} = 600 V, V_{GS} = 0 V, I_{SD} =5A, di/dt = 1.2 kA/μs	-	7.8	-	ns
Q_{rr}	Reverse Recovery Charge		-	31.9	-	nC
I_{rrm}	Peak Reverse Recovery Current		-	7.2	-	A

Typical Performance Characteristics

Figure 1. Safe operating area (SOA)

Single Pulse, T_{VJ} = 25°C

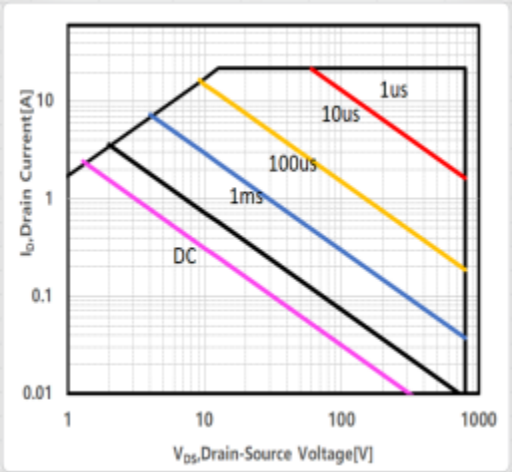

Figure 2. Power dissipation as a function of case temperature limited by bond wire

$P_D = f(T_C)$

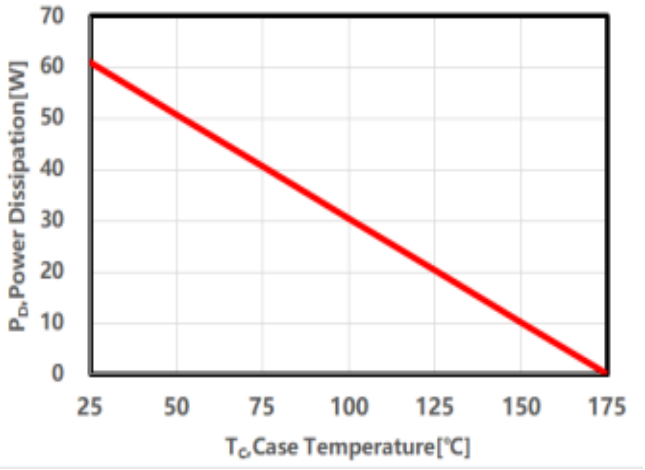

Figure 3. Typical output characteristic, VGS as parameter

I_{DS}= f(V_{DS}) T_{VJ} = -55 °C

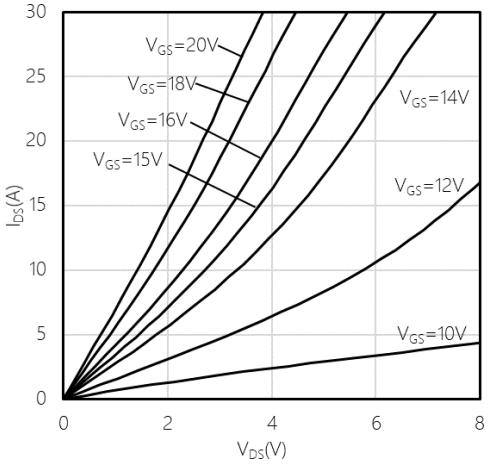

Figure 4. Typical output characteristic, VGS as parameter

I_{DS} = f(V_{DS}) T_{VJ} = 25 °C

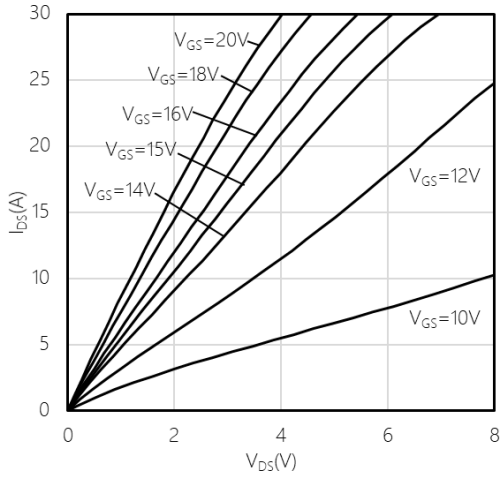

Figure 5. Typical output characteristic, VGS as parameter

I_{DS} = f(V_{DS}) T_{VJ} = 175°C

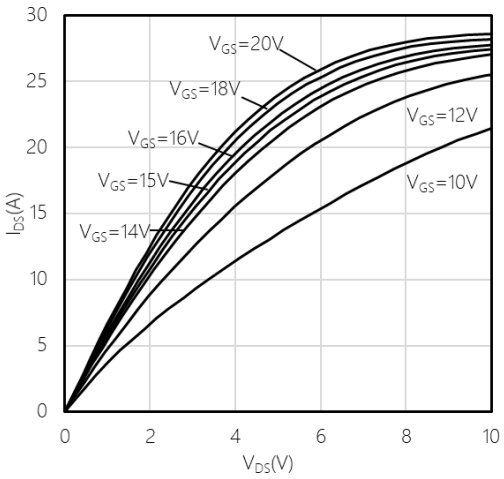

Figure 6. Typical on-state resistance as a function of drain current

$R_{DS(on)}$ = f(I_{DS}), V_{GS} = 15V

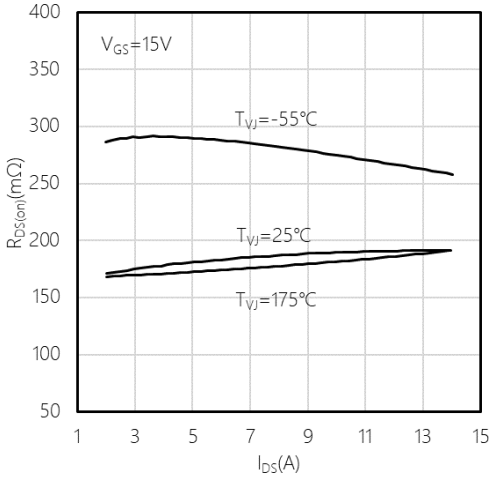

Typical Performance Characteristics

Figure 7. Typical on-state resistance as a function of temperature

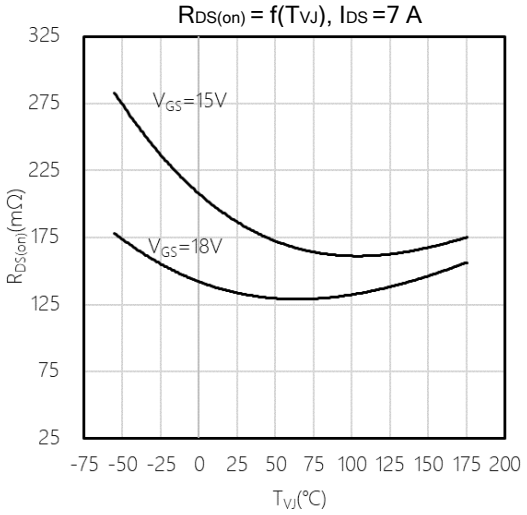

Figure 8. Typical on-state resistance as a function of VGS

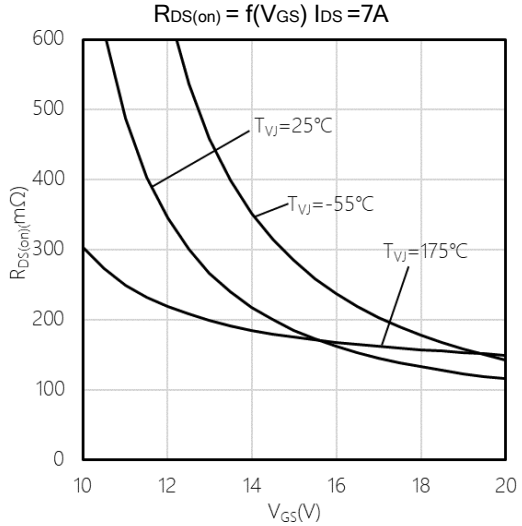

Figure 9. Typical transfer characteristic

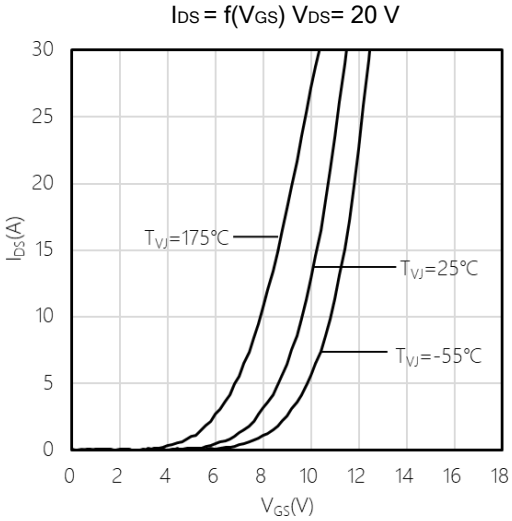

Figure 10. Typical gate-source threshold voltage as a function of junction temperature

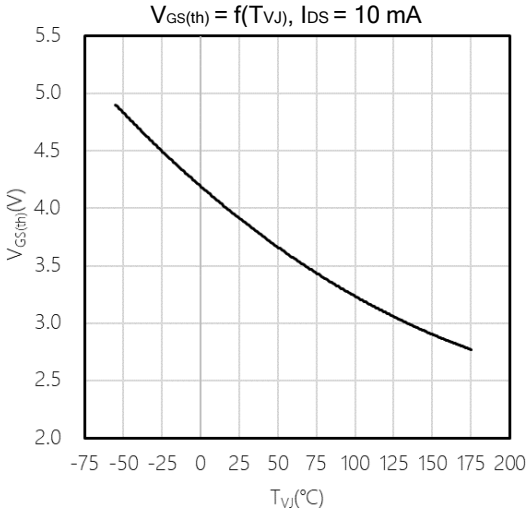

Figure 11. Typical reverse drain current as function of reverse drain voltage, VGS as parameter

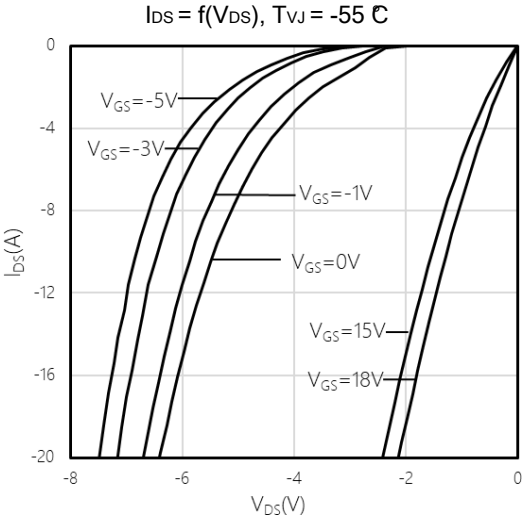

Figure 12. Typical reverse drain current as function of reverse drain voltage, VGS as parameter

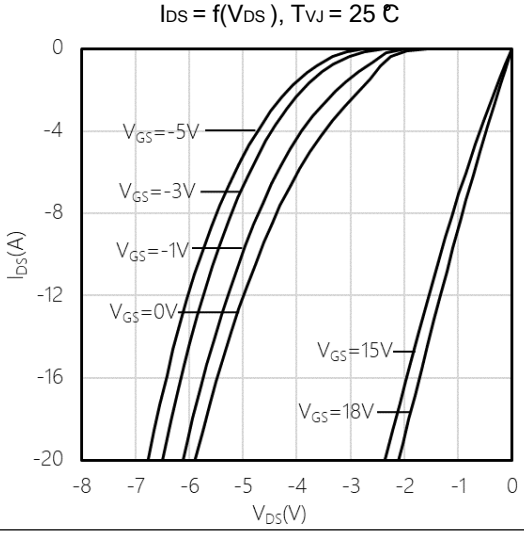

Typical Performance Characteristics

Figure 13.Typical reverse drain current as function of reverse drain voltage, VGS as parameter

$I_{DS} = f(V_{DS})$, $T_{VJ} = 175$ ℃

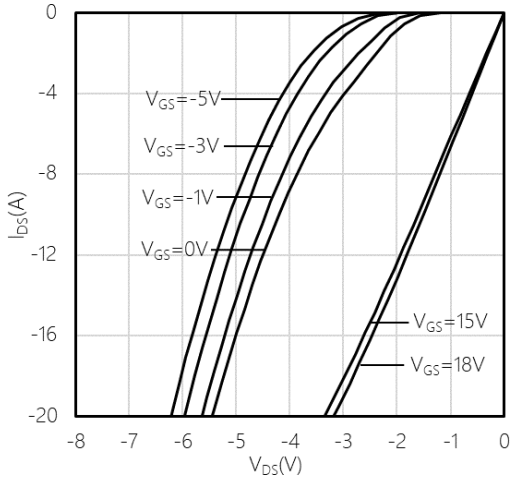

Figure 14. Typical reverse drain voltage as function of junction temperature

$V_{SD} = f(T_{VJ})$, $I_{SD} = 3.5A$

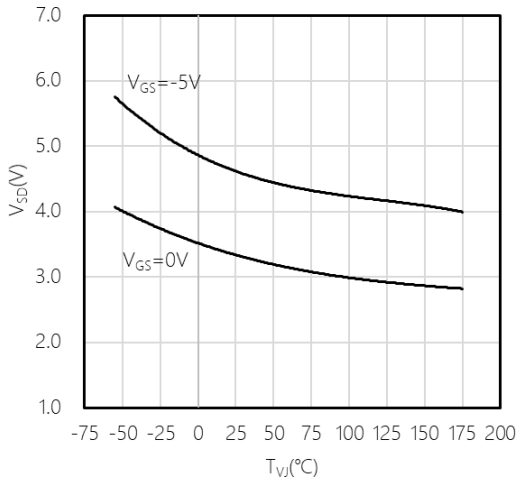

Figure 15. Typical switching energy as a function of junction temperature

$E = f(T_{VJ})$

$V_{DS} = 400$ V, $R_G(ext) = 2.2\ \Omega$, $V_{GS} = 0/15$ V, $I_{DS} = 5A$

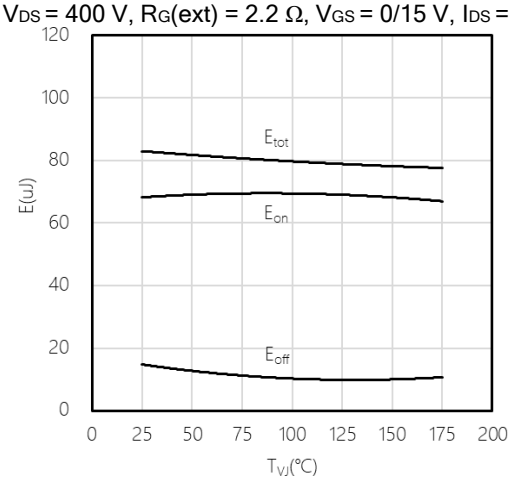

Figure 16. Typical switching energy losses as a function of gate resistance

$E = f(R_{G(EXT)})$ $V_{GS} = 0/15$ V, $I_{DS} = 5A$, $T_{VJ} = 25$ °C, $V_{DS} = 600$ V

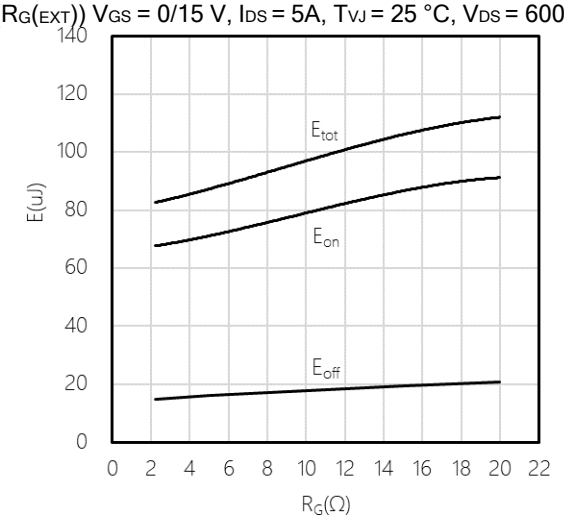

Figure 17. Typical switching energy losses as a function of gate resistance

$E = f(_{RG(EXT)})$

$V_{GS} = 0/15$ V, $I_{DS} = 7$ A, $T_{VJ} = 175$ °C, $V_{DS} = 400$ V

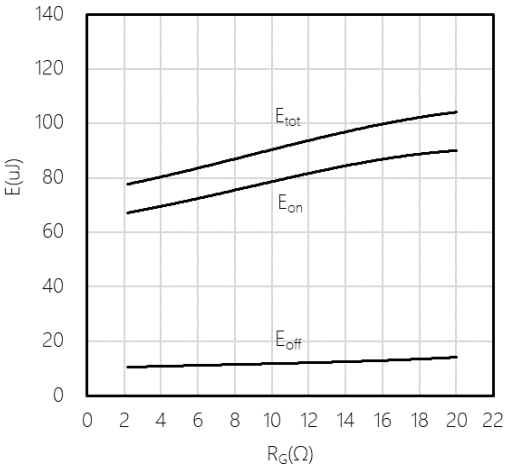

Figure 18. Typical switching energy losses as a function of I_{DS}

$E = f(I_{DS})$, $V_{GS} = 0/15$ V, $R_{G(ext)} = 2.2\ \Omega$, $T_{VJ} = 25$ °C, $V_{DS} = 600$ V

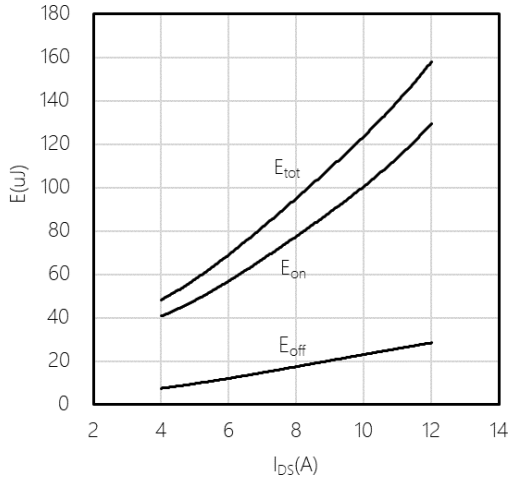

Typical Performance Characteristics

Figure 19.Typical switching energy losses as a function of I_{DS}

$E = f(I_{DS})$
V_{GS} = 0/15 V, R_G(ext) = 2.2 Ω, T_{VJ} = 175 °C, V_{DS} = 600 V

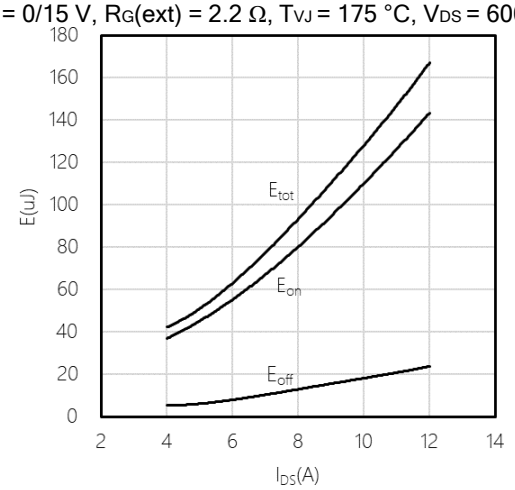

Figure 20. Typical switching energy losses as a function of V_{DS}

$E = f(V_{DS})$
V_{GS} = 0/15 V, $R_{G(ext)}$ = 2.2 Ω, T_{VJ} = 25 °C, I_{DS} = 5 A

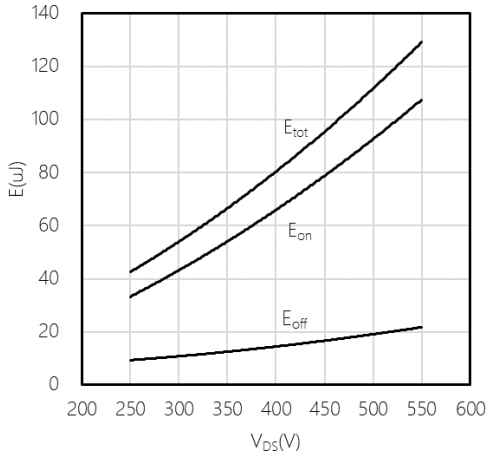

Figure 21. Typical switching energy losses as a function of V_{DS}

$E = f(V_{DS})$
V_{GS} = 0/15 V, RG(ext) = 2.2 Ω, TVJ = 175 °C, I_{DS} = 5A

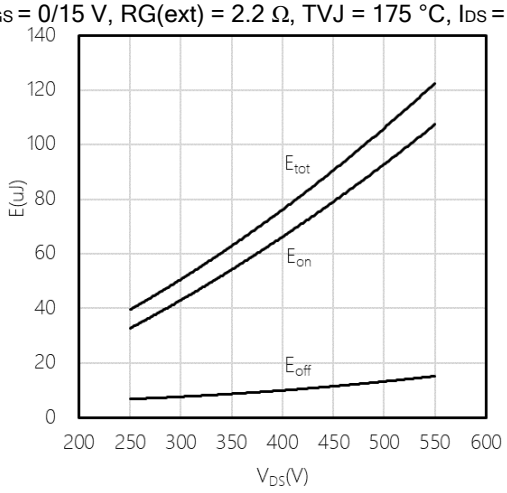

Figure 22. Typical gate charge

V_{GS} =f(Q_G), I_{DS} = 5A, V_{DS} = 600V turn-on pulse

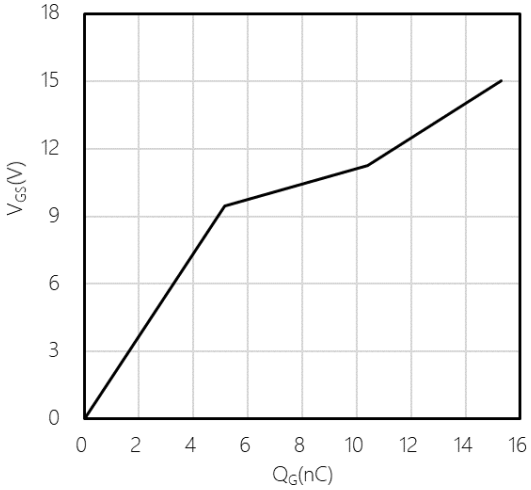

Figure 23. Typical capacitance as a function of drain-source voltage

$C = f(V_{DS})$, V_{GS} = 0V, f = 1MHz

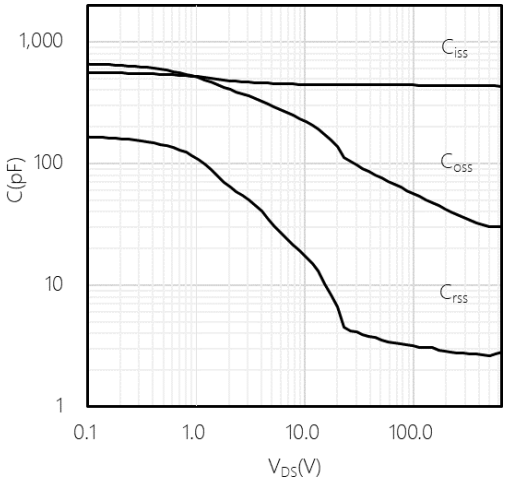

Figure 24. Transient thermal resistance (MOSFET)

(Zth(j-c,max) = f(tp), Parameter D = tp/T

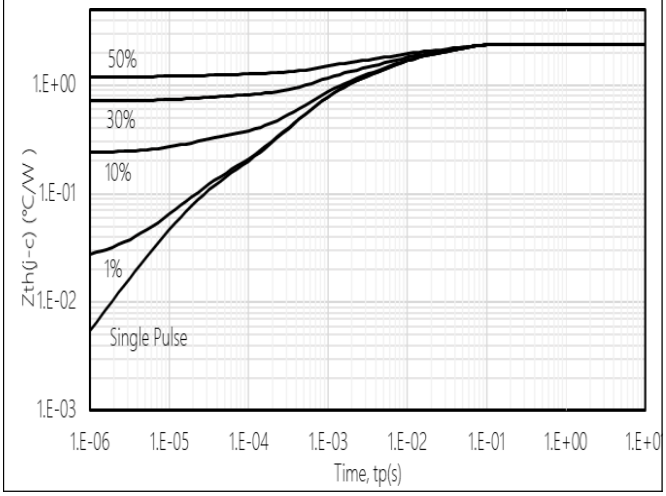

Package Outlines

D-Pak

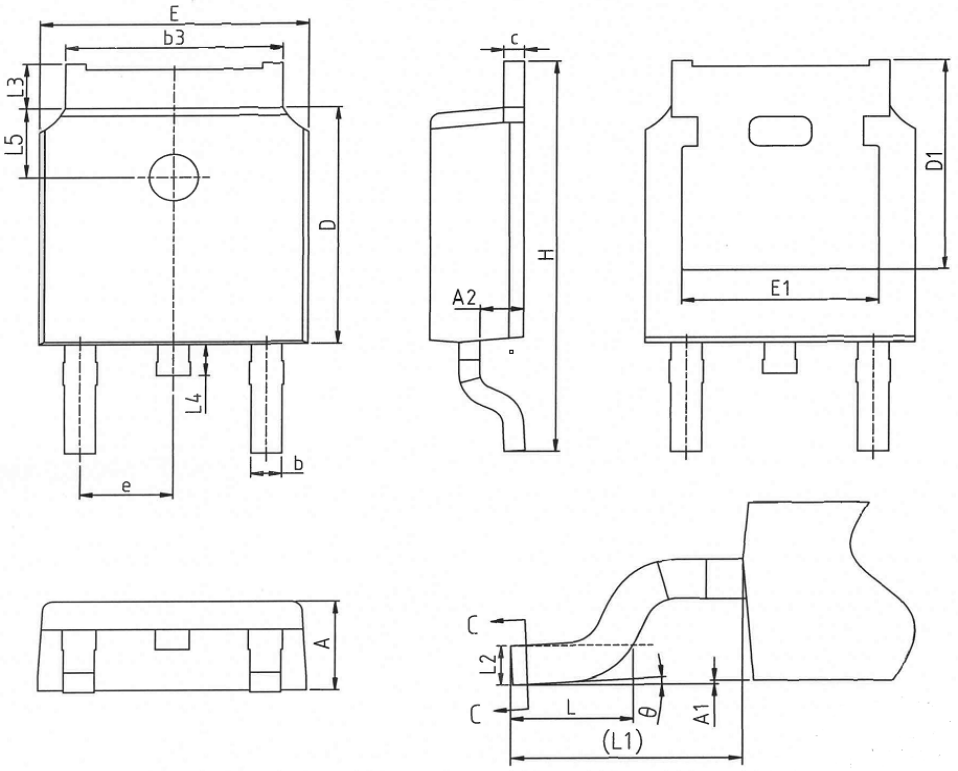

COMMON DIMENSIONS

SYMBOL	mm		
	MIN	NOM	MAX
A	2.20	2.30	2.38
A1	0.00	-	0.12
A2	0.97	1.07	1.17
b	0.68	0.78	0.90
b3	5.20	5.33	5.46
c	0.43	0.53	0.61
D	5.98	6.10	6.22
D1	5.30REF		
E	6.40	6.60	6.73
E1	4.63	-	-
e	2.286BSC		
H	9.40	10.10	10.50
L	1.38	1.50	1.75
L1	2.90REF		
L2	0.51BSC		
L3	0.88	-	1.28
L4	0.50	-	1.00
L5	1.65	1.80	1.95
θ	0°	-	8°

* Dimensions in millimeters

Package Marking and Ordering Information

Part Number	Top Marking	Package	Packing Method	Quantity
BCD80N360M2	BCD80N360M2	DPAK	Tape & Reel	2500 units

Disclaimer

Bestirpower reserve the right to make changes, corrections, enhancements, modifications, and improvements to Bestirpower products and/or to this document at any time without notice.

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. Bestirpower does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Products or technical information described in this document.

This document is the property of Bestirpower Co,. LTD., and not allowed to copy or transformed to other format if not under the authority approval.

© 2026 Bestirpower - All rights reserved