
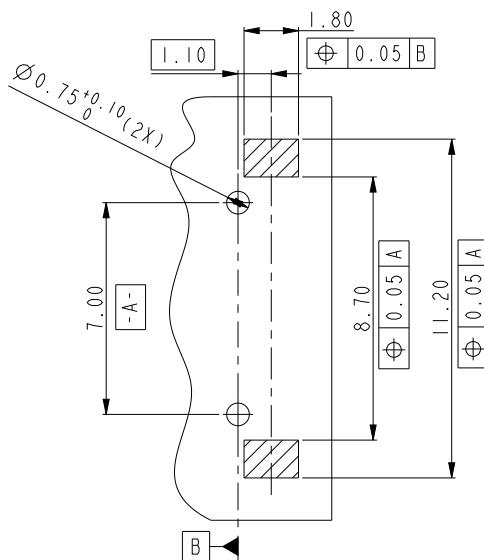


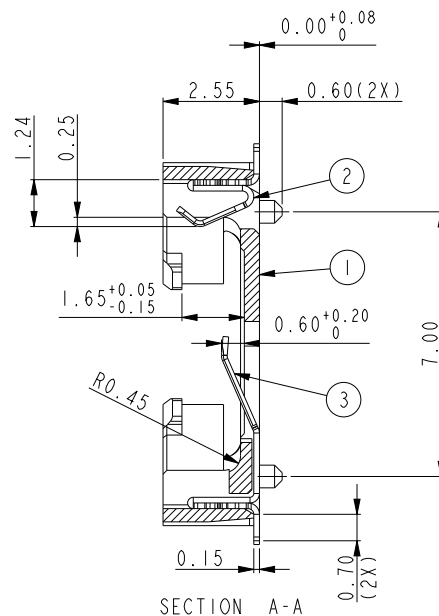


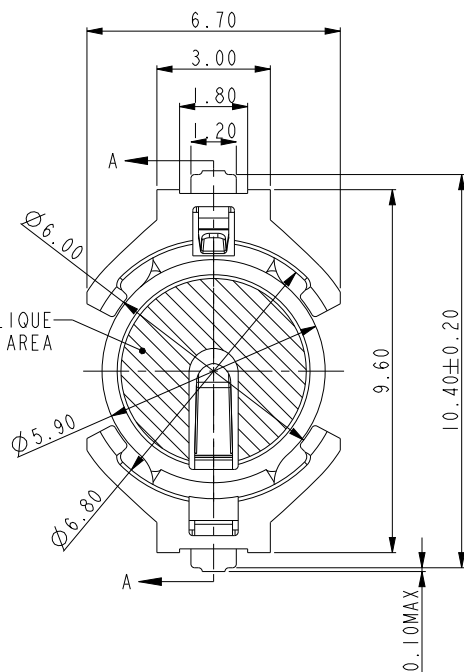

RECOMMEND PCB LAYOUT
(TOLERANCE: ±0.05mm)

REV.	ECN Number	Description	Drawn
I	CSI9070036	RELEASE	ZL_2019.07.05

Note:
1.CONTACT PRESSURE: + 300gf MIN
- 150gf MIN
2.OPERATING TEMPERATURE RANGE: -40 C~+85 C
3.ALL MATERIAL MUST BE COMPLY WITH "RoHS2.0"
4.Product Nunber Matrix:

CPAS-02-1-DFC
C: CARD
P: BATTERY
A: A SERIES
S: TOP ENTRY
PIN No.
Packing:
C: Reel+Mylar
F: High Temperature Thermoplastic
Plating Code:
D: Au 5u"

3	-CONTACT	STAINLESS STEEL
2	+CONTACT	STAINLESS STEEL
I	HOUSING	HIGH TEMPERATURE PLASTICS
ITEM	NAME	MATERIAL



ShenZhen ShenTai weixiang Electronics Co.,Ltd

TOLERANCE UNLESS OTHERWISE SPECIFIED

X.X	±0.20	X.°	±3°
X.XX	±0.15	X.X°	±2°
X.XXX		X.XX°	±1°

SCALE 5:1

UNIT mm

SIZE A4

ORIGINAL DRAWN: ZL

CHECK: Yang Hong

APPROVE: Ady zhou

DATE 2019.07.05

DATE 2019.07.05

DATE 2019.07.05

DWG. NO.

600-0000-0481

PARTS NO.(INTENDED USE)

CPAS-02-1-DFC

TITLE

CPAS-02-1-DFC
CUSTOMER DRAWING

REV.

I

SHEET

I/I