


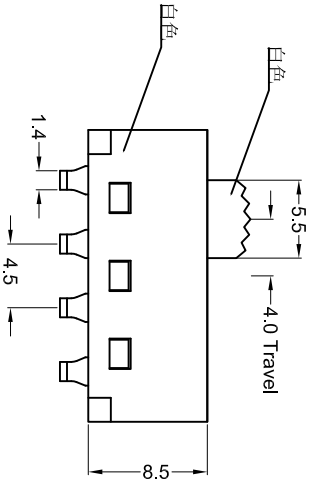


CUSTOMER DRAWING

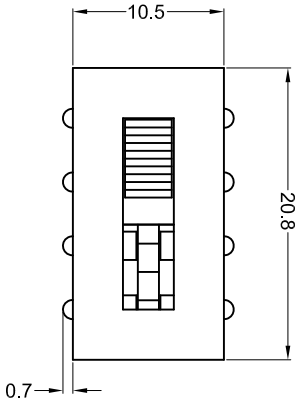

MARKING

HAOTONG
H25-0323SC/PC
3(3)A 125/250VAC



PCB LAYOUT

CIRCUIT

H25	03	XX	X	X	X	X	X	XX		
Series	Rating	Function	Terminal Type	Actuator Type	Actuator Height	Housing Type	Terminal Type	Actuator Color	Housing Color	Suffix
03	10A 125VAC 6A 250VAC 8(3)A 125/250VAC	12	S Solder Terminal	A	3 3mm	N	T1	B Black	B Black	
		13	P PCB Terminal	B	4 4mm		T2	W White	W White	
		14		C	5 5mm		T3	R Red	R Red	
		...			...					
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								
		...								

规格 Specification:

- 1.开关型号 Model No.:H25-0323PC
- 2.额定值 Rating:3(3)A 125/250VAC
- 3.接触电阻 Contact resistance:≤30 mΩ
- 4.绝缘电阻 Insulation resistance:≥100 MΩ(DC500V/Min)
- 5.电气寿命 Electronics life: > 10000 cycles
- 6.操作力 Operation force:400±150gf
- 7.所有材料符合RoHS要求 All materials are RoHS compliant
- 8.出厂使用需知: 30天之后使用, 需烘烤6个小时, 温度110℃, 再进行使用(尼龙9T特性), 样品需要手焊。



佛山市皓通电子有限公司
Foshan Haoswitch Electronic Co.,Ltd.

DRAWN BY	APLIN	2026/01/08	SCALE	FREE	PRODUCT NAME	SLIDE SWITCH
CHECKED BY	APLIN	2026/01/08	PAGE	1/1	DESCRIPTION	
APPROVED BY	ZHANG	2026/01/08	UNIT	mm	PART NO.	3(3)A 125/250VAC
批准			单位		物料编号	
TOLERANCE	X: ±0.5 X: ±0.3 XX: ±0.2	X: ±5° X: ±2°	PROJECTED	投影	DRAWN NO.	H25-0323PC-5NT1ZBB-T
未标注公差			尺寸	A4	图纸编号	HTDW20260108-316