


REV.	DESCRIPTION OF REVISIONS	APPR.	CHKD.	DRAW.	DATE
1	NEW			jimmy	2012/6/14
2	Original Model:U529-4			HUABO	2023/10/23

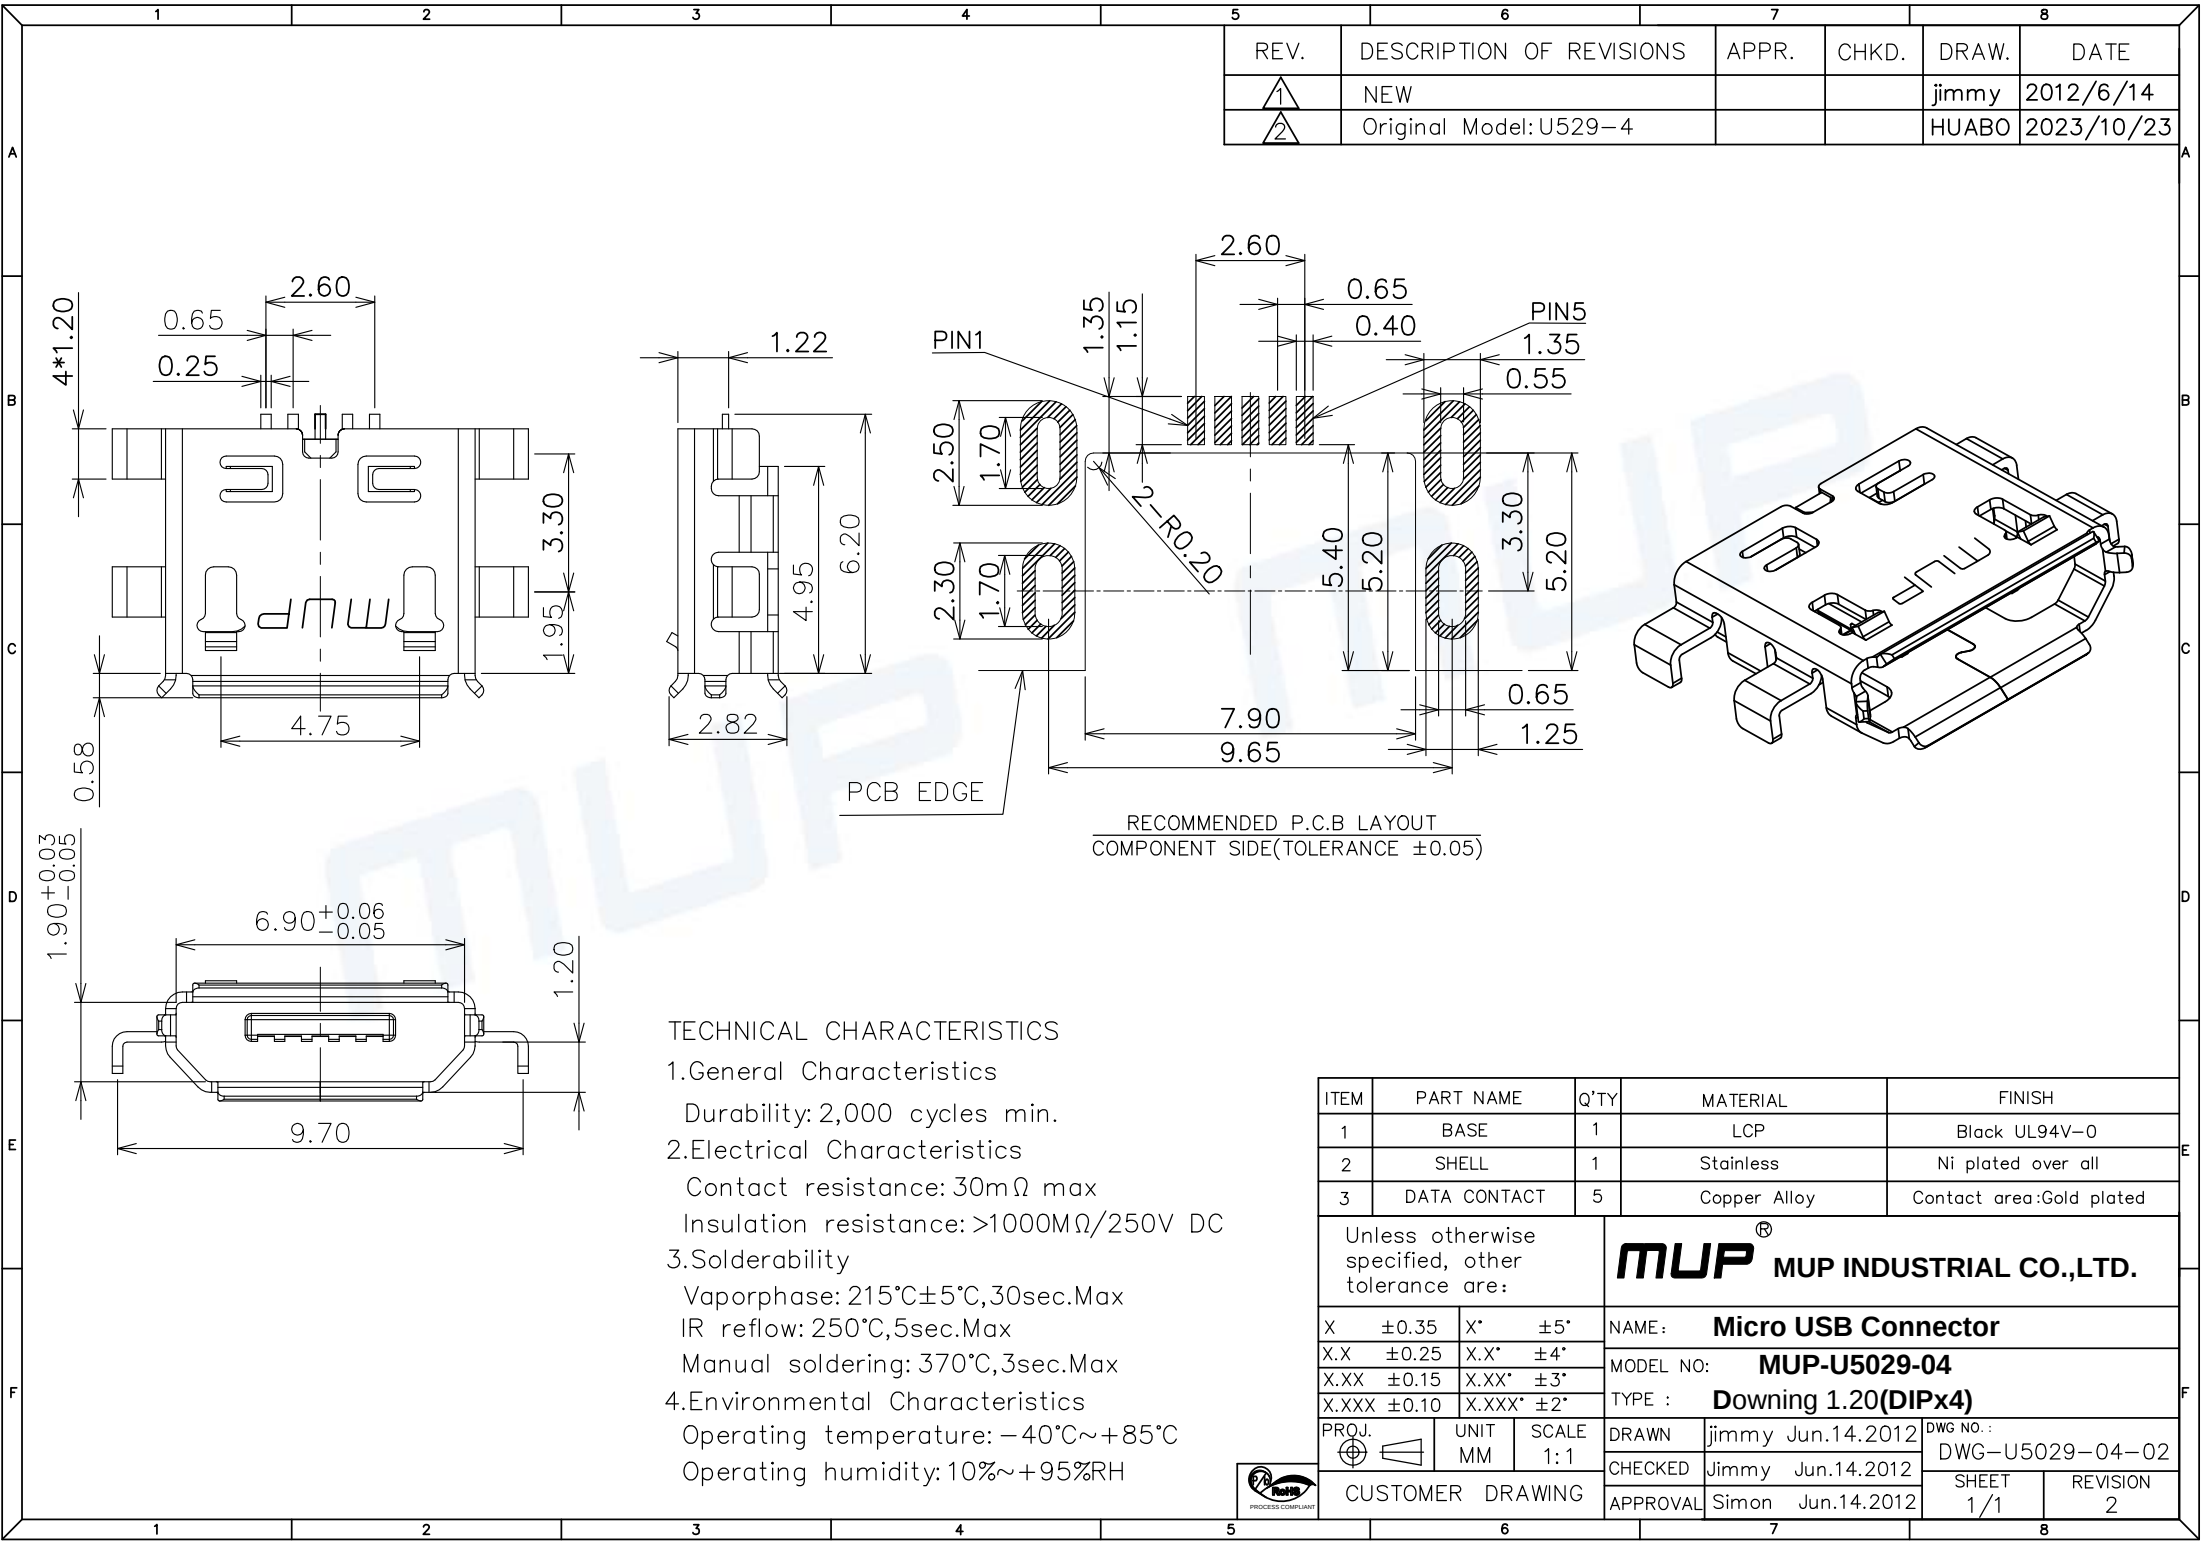

TECHNICAL CHARACTERISTICS

1.General Characteristics

Durability: 2,000 cycles min.

2.Electrical Characteristics

Contact resistance: 30mΩ max

Insulation resistance: >1000MΩ/250V DC

3.Solderability

Vaporphase: 215°C±5°C,30sec.Max

IR reflow: 250°C,5sec.Max

Manual soldering: 370°C,3sec.Max

4.Environmental Characteristics

Operating temperature: -40°C~+85°C

Operating humidity: 10%~+95%RH

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	BASE	1	LCP	Black UL94V-0
2	SHELL	1	Stainless	Ni plated over all
3	DATA CONTACT	5	Copper Alloy	Contact area:Gold plated

Unless otherwise specified, other tolerance are:			MUP MUP INDUSTRIAL CO.,LTD.	
X	±0.35	X*	±5*	NAME: Micro USB Connector
X.X	±0.25	X.X*	±4*	MODEL NO: MUP-U5029-04
X.XX	±0.15	X.XX*	±3*	TYPE : Downing 1.20(DIPx4)
X.XXX	±0.10	X.XXX*	±2*	
PROJ.	UNIT	SCALE	DRAWN	jimmy Jun.14.2012
MM	MM	1:1	CHECKED	Jimmy Jun.14.2012
CUSTOMER DRAWING			APPROVAL	Simon Jun.14.2012
			SHEET	1/1
			REVISION	2