

Features

- Supply Voltage: 1.75 V to 5.5 V
- Offset Voltage: ± 1.5 mV (Max)
- GBWP: 300 kHz, Slew Rate: 0.15 V/ μ s
- Rail-to-Rail Input and Output
- 0.1-Hz to 10-Hz Voltage Noise: 1 μ V_{PP}
- No Significant Output Glitch during Power-on and Power-off
- Low Power: 25 μ A per Channel (Max)
- Operating Temperature Range: -40°C to 125°C

Applications


- Sensor Signal Conditioning
- Instrumentation
- Industrial Control
- IoT Device

Description

The TPA653x is a series of CMOS single, dual, and quad RRIO op amps with low offset, low power, and stable high-frequency response. The series incorporates 3PEAK's proprietary and patented design techniques to achieve 300-kHz bandwidth, 0.15-V/ μ s slew rate, and low distortion while drawing only 25 μ A of quiescent current per amplifier which is suitable for low-power applications.

The TPA653x op amps have 1- μ V_{PP} voltage noise at 0.1 Hz to 10 Hz, because the bipolar transistor with low 1/f noise is used as the input stage.

Typical Application Circuit

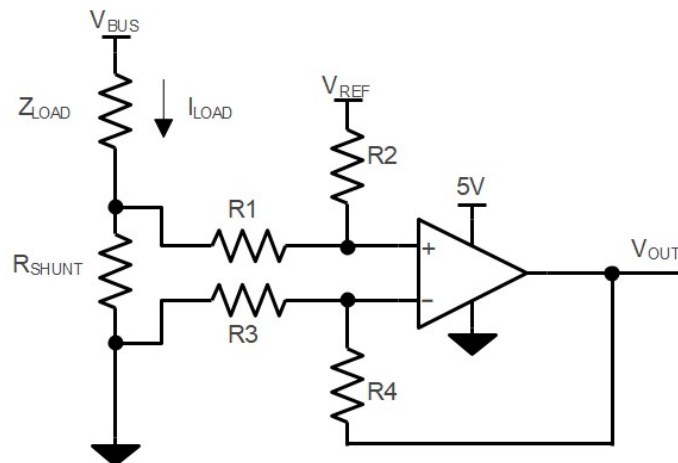

$$V_{OUT} = (I_{LOAD} \times R_{SHUNT}) \times (R2 / R1) + V_{REF}$$

$$\text{When } R3 = R1, R2 = R4, R_{SHUNT} \ll R1$$

Table of Contents

Features	1
Applications	1
Description	1
Typical Application Circuit	1
Revision History	3
Pin Configuration and Functions	4
Specifications	9
Absolute Maximum Ratings ⁽¹⁾	9
ESD, Electrostatic Discharge Protection.....	9
Recommended Operating Conditions.....	9
Thermal Information.....	10
Electrical Characteristics.....	11
Typical Performance Characteristics.....	13
Detailed Description	18
Overview.....	18
Functional Block Diagram.....	18
Feature Description.....	18
Application and Implementation	20
Application Information	20
Tape and Reel Information	21
Package Outline Dimensions	23
SOT353 (SC70-5).....	23
SOT363 (SC70-6).....	24
SOT23-5.....	25
SOT23-6.....	26
SOP8.....	27
MSOP8.....	28
TSSOP14.....	29
SOP14.....	30
QFN3X3-16.....	31
Order Information	32
IMPORTANT NOTICE AND DISCLAIMER	33

Revision History

Date	Revision	Notes
2022-08-15	Rev.A.0	Initial version.
2023-02-25	Rev.A.1	Updated the minimum value of supply voltage to 1.75 V.
2024-12-10	Rev.A.2	The following updates are all about the new datasheet formats or typos, and the actual product remains unchanged. • Updated the Tape and Reel Information.
2025-07-16	Rev.A.3	Updated the part number of TPA6534U-QF4R.
2025-11-28	Rev.A.4	Added the thermal pad description in the Pin Configuration and Functions. The actual product remains unchanged.

Pin Configuration and Functions

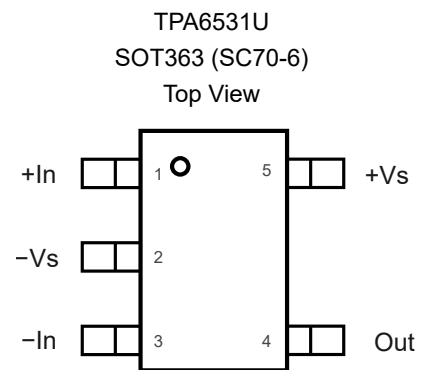
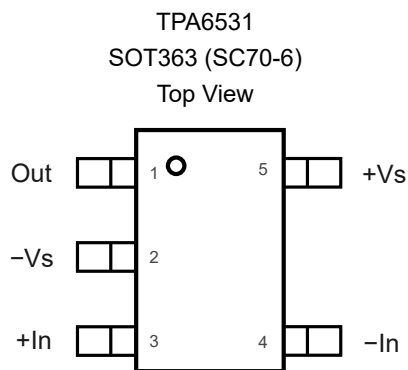
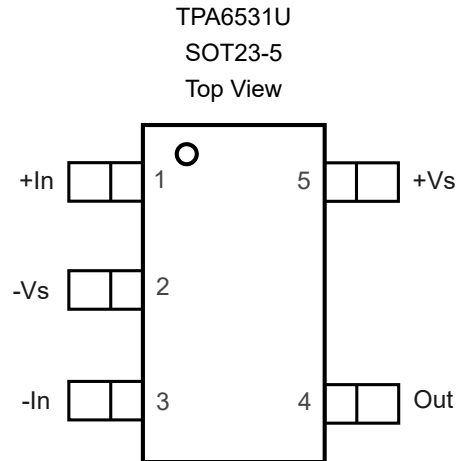
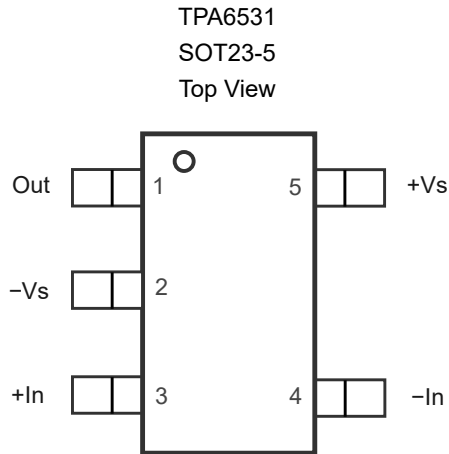
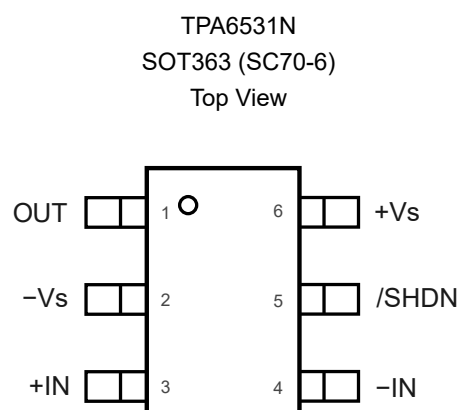
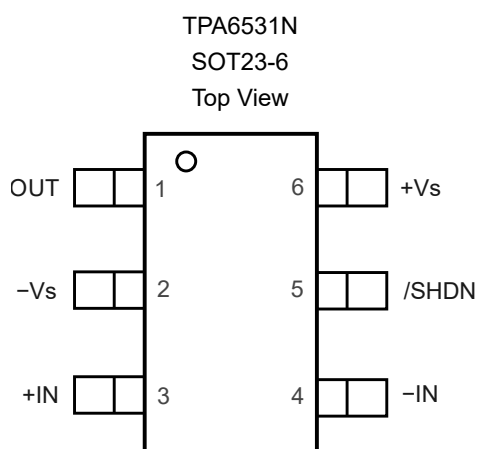
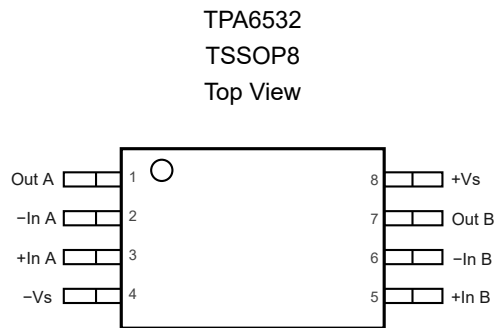

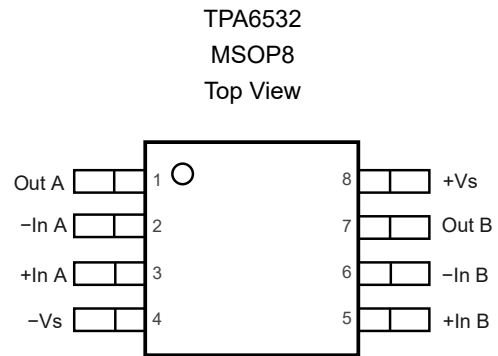
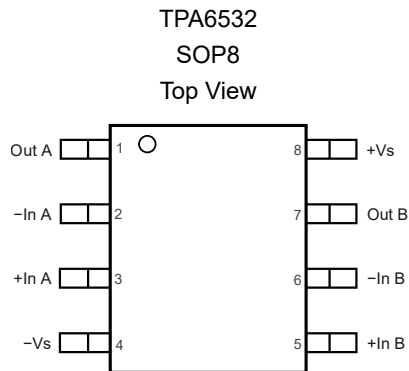


Table 1. Pin Functions: TPA6531, TPA6531U




Pin No.		Name	I/O	Description
TPA6531	TPA6531U			
1	4	Out	O	Output.
2	2	-Vs		Negative power supply.
3	1	+In	I	Non-inverting input.
4	3	-In	I	Inverting input.
5	5	+Vs		Positive power supply.


Table 2. Pin Functions: TPA6531N

Pin No.	Name	I/O	Description
1	Out	O	Output.
2	-Vs		Negative power supply.
3	+In	I	Non-inverting input.
4	-In	I	Inverting input.
5	/SHDN	I	Shut down input. The device is shut down when the low-level input voltage is on the input; the device is active when the high-level input voltage is on the input. The device is active in default with a 10-MΩ internal pull-up resistor.
6	+Vs		Positive power supply.


Table 3. Pin Functions: TPA6532

Pin No.	Name	I/O	Description
1	Out A	O	Output.
2	-In A	I	Inverting input.
3	+In A	I	Non-inverting input.
4	-Vs		Negative power supply.
5	+In B	I	Non-inverting input.
6	-In B	I	Inverting input.
7	Out B	O	Output.
8	+Vs		Positive power supply.
	Thermal Pad		The thermal pad of the DFN2X2-8 is recommended to be left float or connected to -Vs.

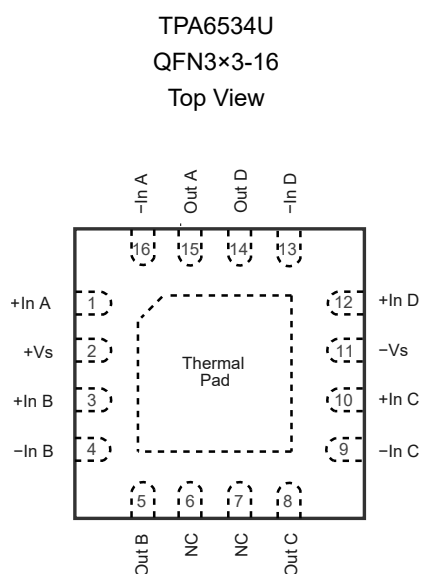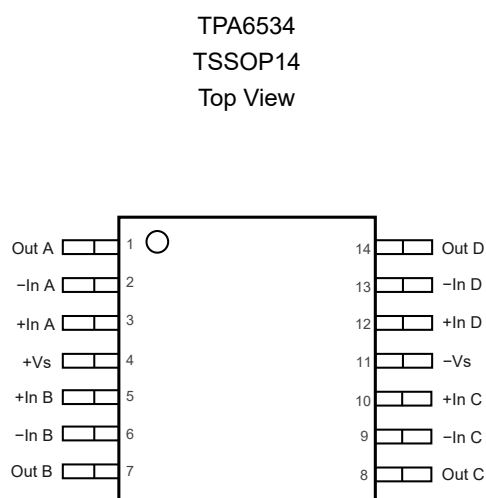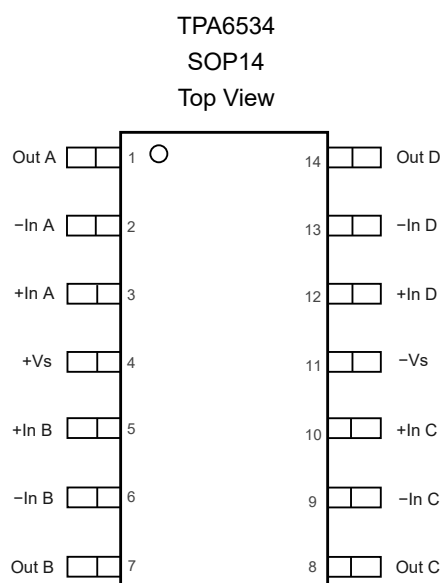

The thermal pad of the QFN3X3-16 packages is recommended to be left float or connected to $-V_S$.

Table 4. Pin Functions: TPA6534, TPA6534U

Pin No.		Name	I/O	Description
TPA6534	TPA6534U			
1	15	Out A	O	Output
2	16	-In A	I	Inverting input
3	1	+In A	I	Non-inverting input
4	2	+Vs		Positive power supply
5	3	+In B	I	Non-inverting input
6	4	-In B	I	Inverting input

7	5	Out B	O	Output power supply
8	8	Out C	O	Output power supply
9	9	-In C	I	Inverting input
10	10	+In C	I	Non-inverting input
11	11	-V _S		Negative power supply
12	12	+In D	I	Non-inverting input
13	13	-In D	I	Inverting input
14	14	Out D	O	Output
	6, 7	NC		No connection

Specifications

Absolute Maximum Ratings ⁽¹⁾

Parameter		Min	Max	Unit
	Supply Voltage, (+V _S) – (–V _S)		6.5	V
	Input Voltage	(–V _S) – 0.3	(+V _S) + 0.3	V
	Differential Input Voltage	(–V _S) – (+V _S)	(+V _S) – (–V _S)	V
	Input Current: +I _N , –I _N ⁽²⁾	–10	+10	mA
	Output Voltage	(–V _S) – 0.3	(+V _S) + 0.3	V
	Output Short-Circuit Duration ⁽³⁾		Infinite	
T _J	Maximum Junction Temperature		150	°C
T _A	Operating Temperature Range	–40	125	°C
T _{STG}	Storage Temperature Range	–65	150	°C
T _L	Lead Temperature (Soldering 10 sec)		260	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

(2) The inputs are protected by ESD protection diodes to each power supply. If the input extends more than 300 mV beyond the power supply, the input current should be limited to less than 10 mA.

(3) A heat sink may be required to keep the junction temperature below the absolute maximum. This depends on the power supply voltage and how many amplifiers are shorted. Thermal resistance varies with the amount of PC board metal connected to the package. The specified values are for short traces connected to the leads.

ESD, Electrostatic Discharge Protection

Parameter		Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	2	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 ⁽²⁾	1	kV

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Recommended Operating Conditions

Parameter		Min	Typ	Max	Unit
V _S	Supply Voltage, (+V _S) – (–V _S)	1.75		5.5	V
T _A	Operating Temperature Range	–40		125	°C

Thermal Information

Package Type	θ_{JA}	θ_{JC}	Unit
SOT353 (SC70-5)	400	150	°C/W
SOT23-5	250	81	°C/W
SOT23-6	250	81	°C/W
SOP8	158	43	°C/W
MSOP8	210	45	°C/W
TSSOP8	191	44	°C/W
SOP14	120	36	°C/W
TSSOP14	180	35	°C/W
QFN3×3-16	75	54	°C/W

Electrical Characteristics

All test conditions: $V_S = 5\text{ V}$, $T_A = 25^\circ\text{C}$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$, unless otherwise noted.

Symbol	Parameter	Conditions	T_A	Min	Typ	Max	Unit
Power Supply							
V_S	Supply Voltage Range			1.75		5.5	V
I_Q	Quiescent Current per Amplifier	$V_S = 1.75\text{ V to }5.5\text{ V}$, TPA6531	$-40^\circ\text{C to }125^\circ\text{C}$		20	30	μA
						35	μA
		$V_S = 1.75\text{ V to }5.5\text{ V}$, TPA6532/TPA6534	$-40^\circ\text{C to }125^\circ\text{C}$		12	25	μA
						30	μA
PSRR	Power Supply Rejection Ratio	$V_S = 1.9\text{ V to }5.5\text{ V}$		90	110		dB
			$-40^\circ\text{C to }125^\circ\text{C}$	85			dB
	Power-on Time				30		μs
Shutdown, TPA6531N Only							
	Quiescent Current in Shutdown Mode				0.5		μA
			$-40^\circ\text{C to }125^\circ\text{C}$				μA
V_{IL}	Input Low Voltage	Shutdown				$0.15 \times V_S$	V
V_{IH}	Input High Voltage	Active		$0.85 \times V_S$			V
	Input Current		$-40^\circ\text{C to }125^\circ\text{C}$		0.5	2	μA
	Turn-on time				30		μs
	Turn-off time				10		μs
Input Characteristics							
V_{OS}	Input Offset Voltage	$V_{CM} = 0\text{ V to }5\text{ V}$		-1.5	0.1	1.5	mV
			$-40^\circ\text{C to }125^\circ\text{C}$	-3		3	mV
		$V_S = 1.75\text{ V}$, $V_{CM} = 0.875\text{ V}$		-3	0.5	3	mV
V_{OSTC}	Input Offset Voltage Drift		$-40^\circ\text{C to }125^\circ\text{C}$		1		$\mu\text{V}/^\circ\text{C}$
I_B	Input Bias Current	$V_{CM} = 0\text{ V}$			25		nA
			$-40^\circ\text{C to }125^\circ\text{C}$		50		nA
I_{OS}	Input Offset Current	$V_{CM} = 0\text{ V}$			1		nA
I_B	Input Bias Current	$V_{CM} = 5\text{ V}$			10		nA
			$-40^\circ\text{C to }125^\circ\text{C}$		30		nA
I_{OS}	Input Offset Current	$V_{CM} = 5\text{ V}$			1		nA
C_{IN}	Input Capacitance	Differential mode			2		pF
		Common mode			4		pF
A_V	Open-Loop Voltage Gain	$V_O = 0.1\text{ V to }4.9\text{ V}$, $R_L = 100\text{ k}\Omega$		80	90		dB

Symbol	Parameter	Conditions	T _A	Min	Typ	Max	Unit
			−40°C to 125°C	70			dB
V _{CMR}	Common-Mode Input Voltage Range		−40°C to 125°C	(−V _S)		(+V _S)	V
CMRR	Common-Mode Rejection Ratio	V _{CM} = 0 V to 3.5 V		80	95		dB
			−40°C to 125°C	75			dB
		V _{CM} = 0 V to 5 V		70	85		dB
			−40°C to 125°C	65			dB
Output Characteristics							
	Output Voltage Swing from Positive Rail	V _S = 5.5 V, R _L = 10 kΩ to V _S / 2			3	10	mV
			−40°C to 125°C			15	mV
		V _S = 5.5 V, R _L = 2 kΩ to V _S / 2			10	30	mV
			−40°C to 125°C			40	mV
	Output Voltage Swing from Negative Rail	V _S = 5.5 V, R _L = 10 kΩ to V _S / 2			3	10	mV
			−40°C to 125°C			15	mV
		V _S = 5.5 V, R _L = 2 kΩ to V _S / 2			8	15	mV
			−40°C to 125°C			20	mV
I _{SC}	Output Short-Circuit Current	V _S = 5.5 V, source		80	90		mA
			−40°C to 125°C	50			mA
		V _S = 5.5 V, sink		190	240		mA
			−40°C to 125°C	140			mA
AC Specifications							
GBW	Gain-Bandwidth Product				300		kHz
SR	Slew Rate	G = 1, 2-V step			0.15		V/μs
t _{OR}	Overload Recovery				20		μs
t _S	Settling Time, 0.1%	G = 1, 2-V step			10		μs
	Settling Time, 0.01%				12		μs
PM	Phase Margin	R _L = 10 kΩ, C _L = 100 pF			60		°
GM	Gain Margin	R _L = 10 kΩ, C _L = 100 pF			15		dB
	Channel Separation	f = 100 kHz			−100		dB
Noise Performance							
E _N	Input Voltage Noise	f = 0.1 Hz to 10 Hz			1		μV _{PP}
e _N	Input Voltage Noise Density	f = 1 kHz			40		nV/√Hz
i _N	Input Current Noise	f = 1 kHz			300		fA/√Hz
THD+N	Total Harmonic Distortion and Noise	f = 1 kHz, G = 1, R _L = 10 kΩ, V _{OUT} = 6 V _{RMS}			0.005		%

Typical Performance Characteristics

All test conditions: $V_S = 5\text{ V}$, $T_A = +25^\circ\text{C}$, unless otherwise noted.

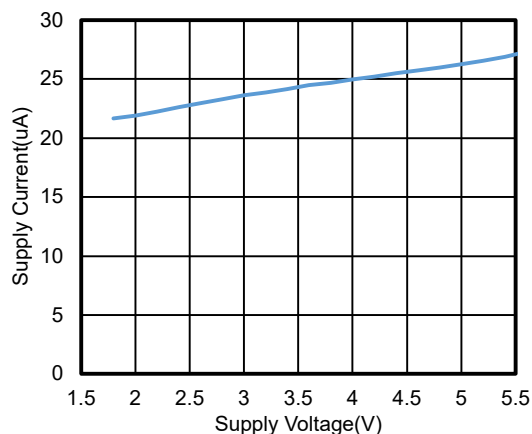


Figure 1. Supply Current vs. Supply Voltage, 2 ch

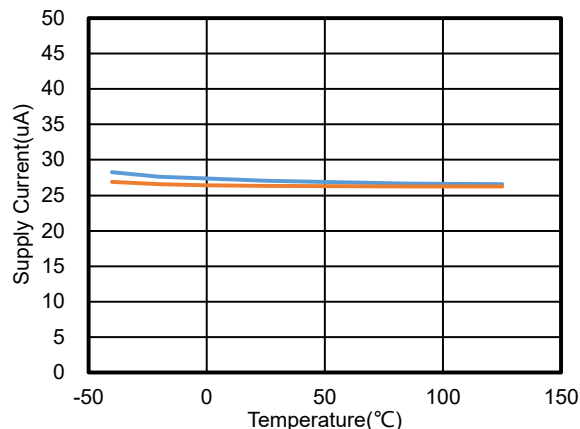


Figure 2. Supply Current vs. Temperature, 2 ch, 2 pcs

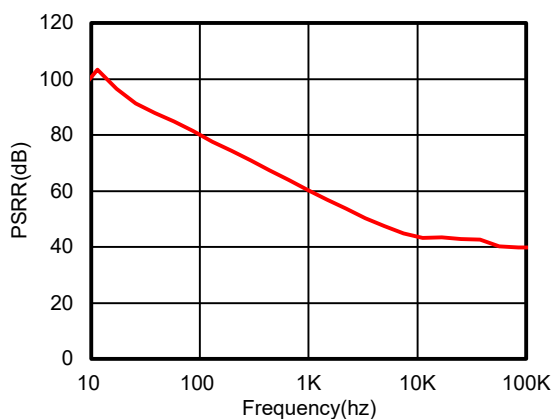


Figure 3. PSRR+ vs. Frequency

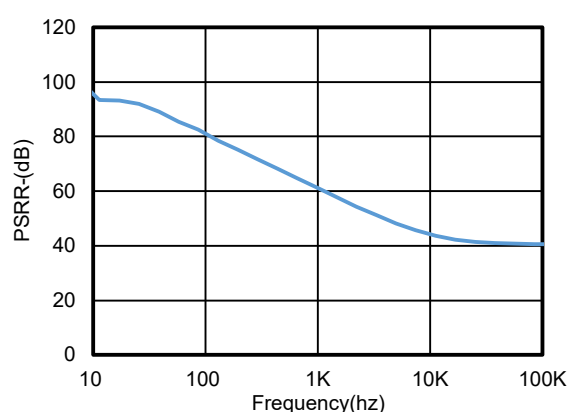


Figure 4. PSRR- vs. Frequency

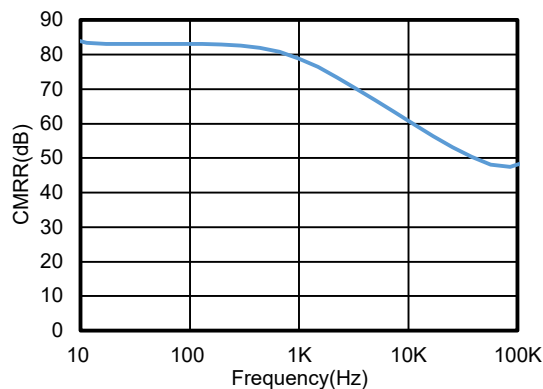


Figure 5. CMRR vs. Frequency

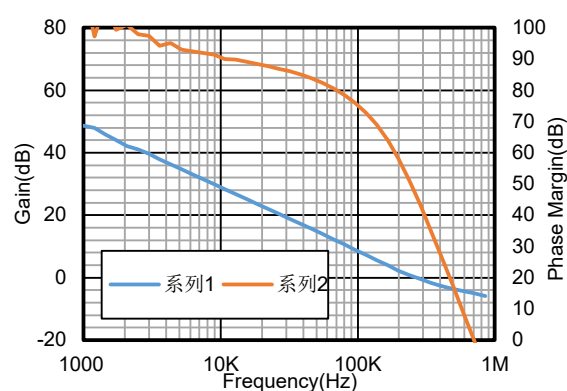
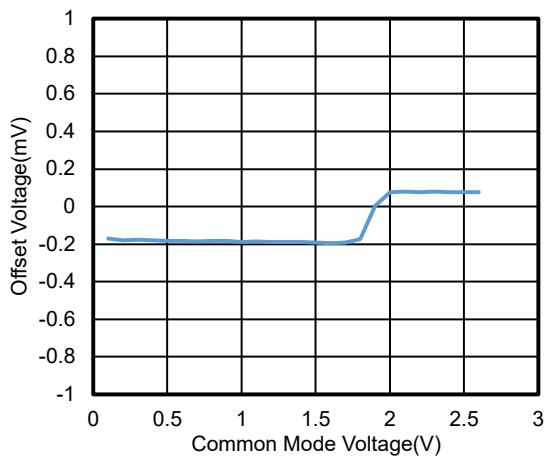
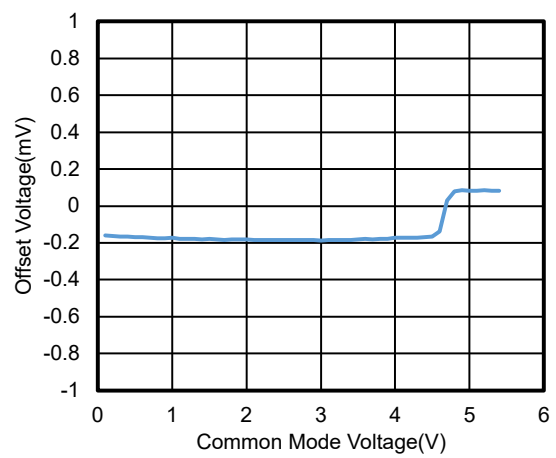
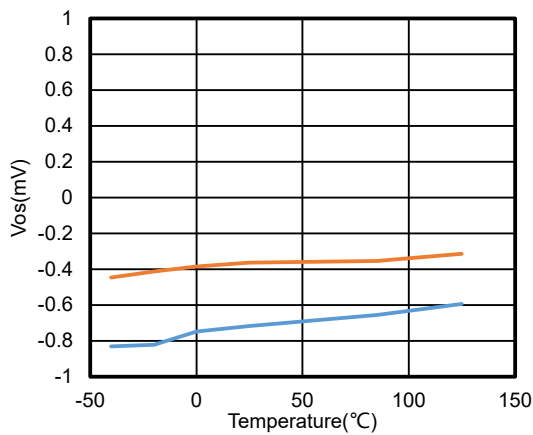
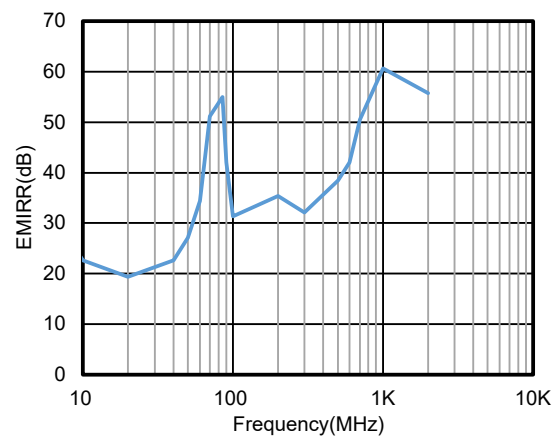
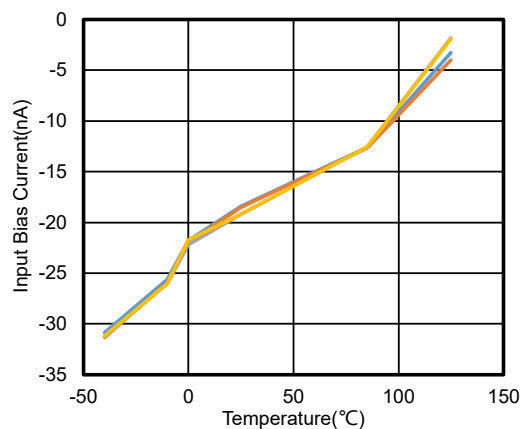
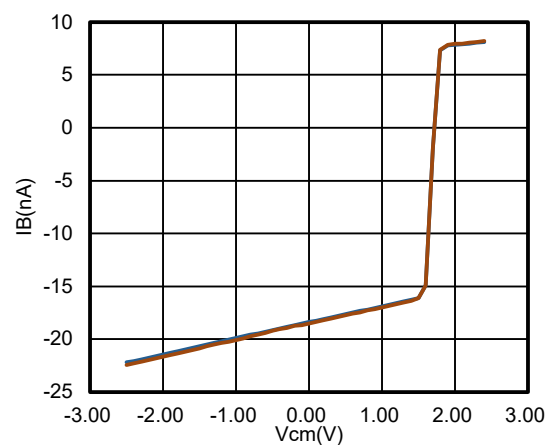


Figure 6. Open-Loop Gain and Phase Margin vs Frequency, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$


Figure 7. V_{OS} vs. V_{CM} , $V_S = 2.7\text{ V}$

Figure 8. V_{OS} vs. V_{CM} , $V_S = 5.5\text{ V}$

Figure 9. V_{OS} vs. Temperature, 2 pcs

Figure 10. EMIRR vs. Frequency

Figure 11. I_B vs. Temperature

Figure 12. I_B vs. Common Voltage, $(-V_S) = -2.5\text{ V}$, $(+V_S) = 2.5\text{ V}$

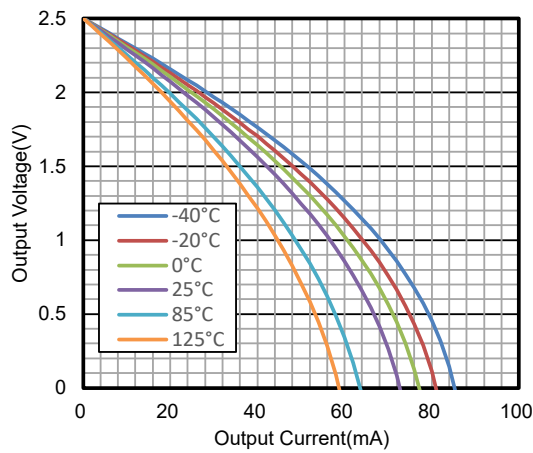
5-V, 300-kHz GBWP, Low-Power Operational Amplifiers


Figure 13. Output Voltage vs. Output Current, ($-V_S$) = -2.5 V, ($+V_S$) = 2.5 V

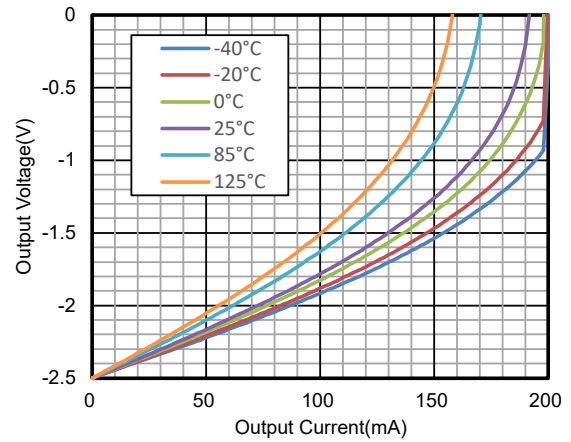


Figure 14. Output Voltage vs. Output Current, ($-V_S$) = -2.5 V, ($+V_S$) = 2.5 V



Figure 15. Overload Recovery at Negative Rail



Figure 16. Overload Recovery at Positive Rail

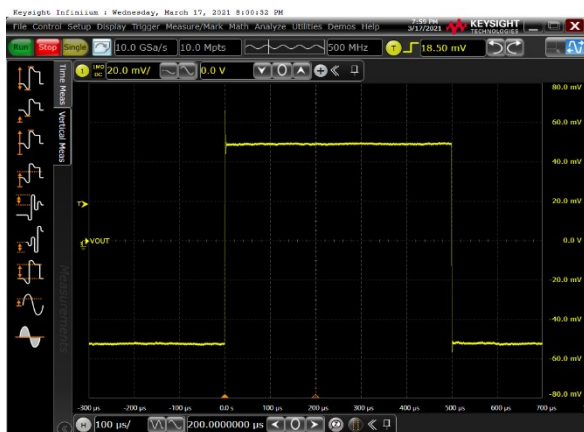


Figure 17. 100-mV Small-Signal Step Response

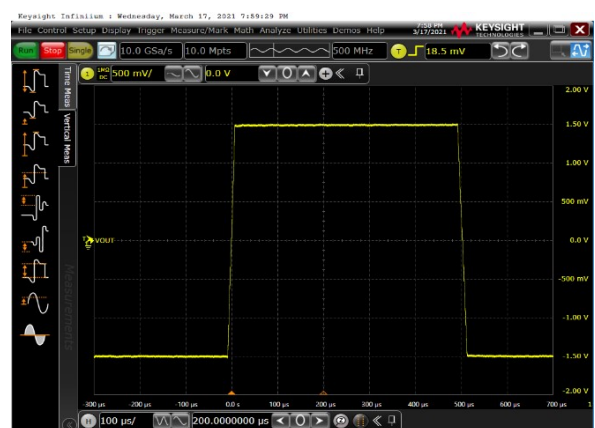


Figure 18. 2-V Large-Signal Step Response

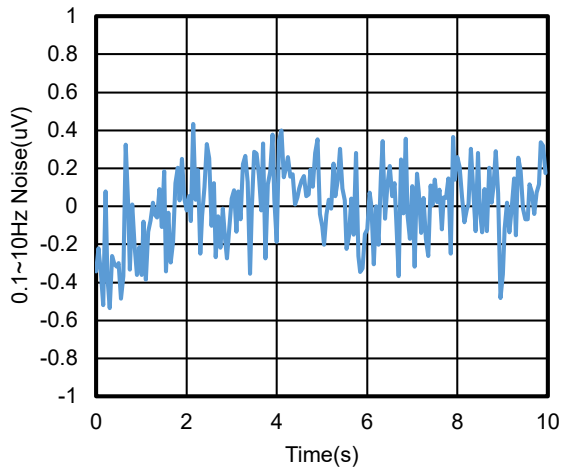
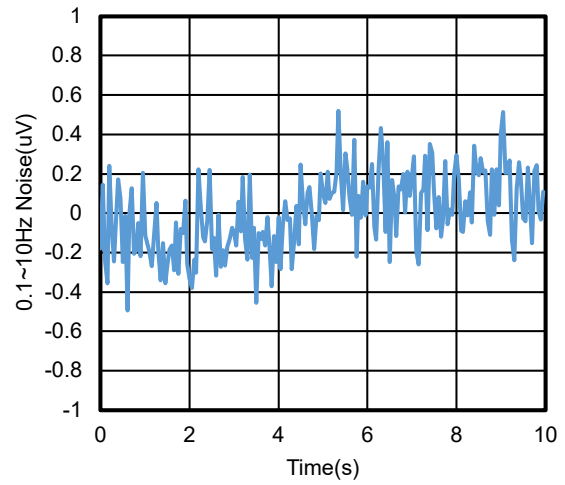
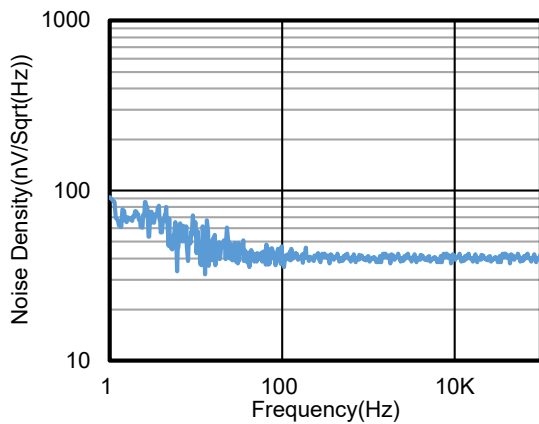
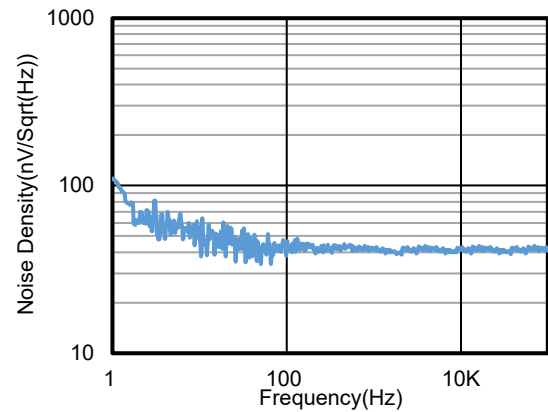
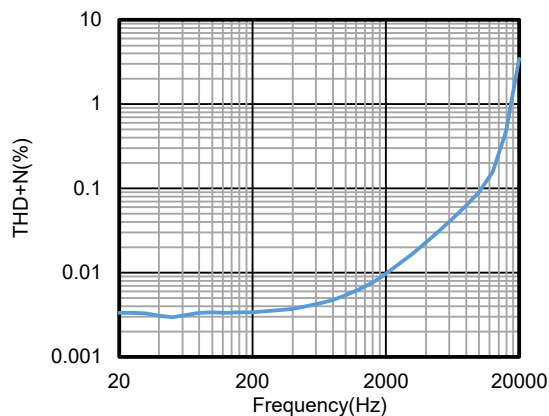
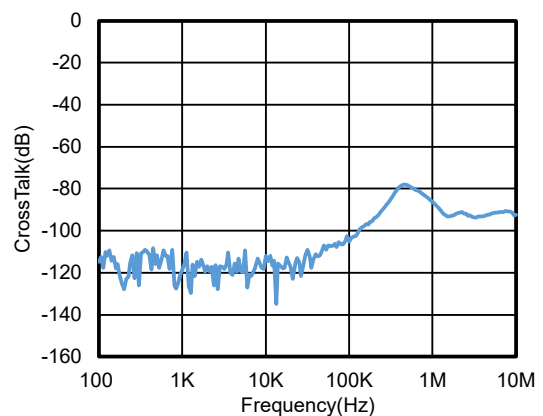

Figure 19. 0.1-Hz to 10-Hz Voltage Noise, $V_{CM} = 1\text{ V}$

Figure 20. 0.1-Hz to 10-Hz Voltage Noise, $V_{CM} = 4\text{ V}$

Figure 21. Voltage Noise Spectral Density vs. Frequency, $V_{CM} = 1\text{ V}$

Figure 22. Voltage Noise Spectral Density vs. Frequency, $V_{CM} = 4\text{ V}$

Figure 23. THD vs. Frequency, $G = 1$, $V_{IN} = 1\text{ V}_{RMS}$

Figure 24. Crosstalk vs. Frequency, TPA6532



Figure 25. Power On and Off Behavior, $G = 1$, $V_{IN} = 0.5\text{ V}$ during Power On and Off, Yellow: $+V_S$, Green: Output

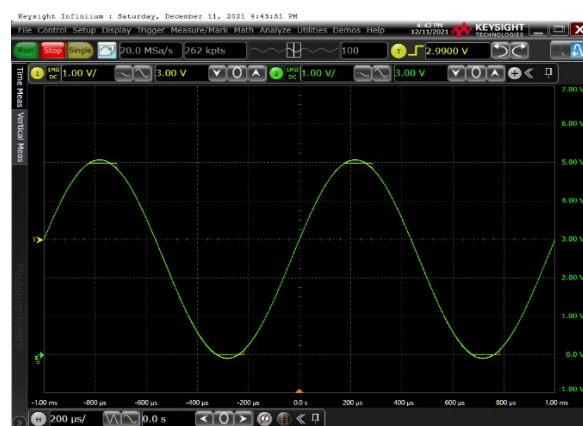


Figure 26. No Phase Reversal Yellow: Input; Green: Output

Detailed Description

Overview

The TPA653x op amps can operate on a single-supply voltage (1.75 V to 5.5 V), or a split-supply voltage (± 0.875 V to ± 2.75 V), making them highly versatile and easy to use. The power-supply pins should have local bypass ceramic capacitors (typically 0.01 μ F to 0.1 μ F). These amplifiers are fully specified from 1.75 V to 5.5 V and over the extended temperature range of -40°C to $+125^{\circ}\text{C}$. Parameters that exhibit variance with regard to operating voltage or temperature are presented in [Typical Performance Characteristics](#).

Functional Block Diagram

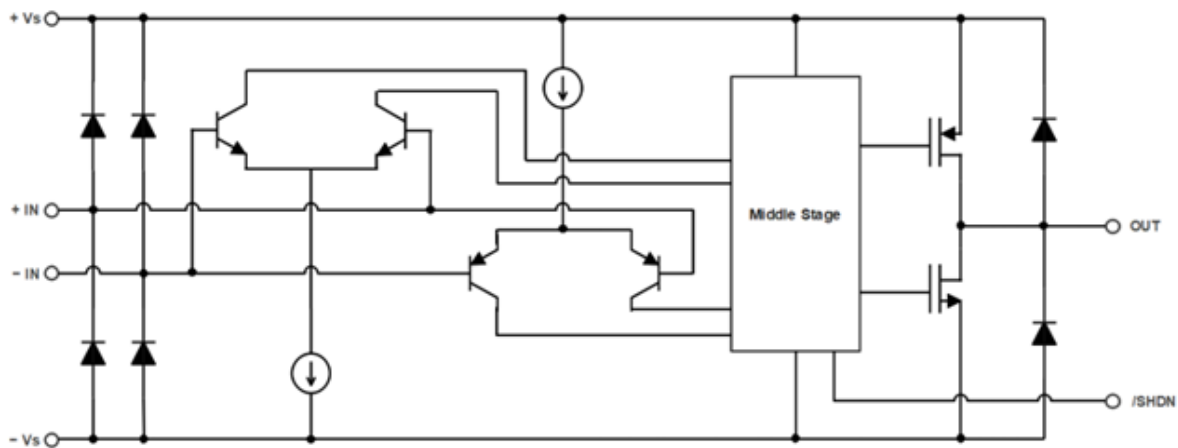


Figure 27. Functional Block Diagram

Feature Description

Operating Voltage

The TPA653x operational amplifiers are designed for single-supply operation from 1.75 V to 5.5 V, or dual-supply operation from ± 0.875 V to ± 2.75 V.

Lower Power

The TPA653x series only draws a maximum 25- μ A current per channel, so is suitable for low-power applications.

Shutdown

The TPA6531N device supports the shutdown feature. The device uses the /SHDN pin to control the work mode. The device shuts down when the voltage of /SHDN pin is low; The device is activated when the voltage of /SHDN pin is high. The device is active by default by a 10-M Ω internal pull-up resistor connected to the /SHDN pin.

Rail-to-Rail Input

The input common-mode voltage range of the TPA653x series extends 100 mV beyond the supply rails. This performance is achieved with a complementary input stage: a PNP input differential pair in parallel with an NPN input differential pair. The PNP pair is active for inputs from 100 mV below the negative supply to approximately $(+V_S) - 1.5$ V, whereas the NPN pair is

5-V, 300-kHz GBWP, Low-Power Operational Amplifiers

active for input voltages close to the positive rail, typically $(+V_S) - 1.5\text{ V}$ to 100 mV above the positive supply. There is around 200 mV transition region at $(+V_S) - 1.5\text{ V}$ where both pairs are on. Within this transition region, PSRR, CMRR, offset voltage, offset drift, and THD can degrade compared to that operating outside this region.

Rail-to-Rail Output

The TPA653x series delivers rail-to-rail output swing capability with a class-AB output stage. Different load conditions change the ability of the amplifier to swing close to the rails.

Low 1/f Input Voltage Noise

The TPA653x series uses bipolar transistor as input pair which brings very low 1/f voltage noise. The 1/f corner frequency of the device is lower than 100 Hz. The input voltage noise at 0.1 to 10 Hz is $1\text{ }\mu\text{V}_{PP}$, so the device is very suitable for applications that need low noise within the low-frequency range.

Application and Implementation


Note

Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

Application Information

Low-Side Current-Sensing Application

Figure 28 shows the TPA653x configured in a low-side current sensing application. The low-side current sensing method consists of placing a sense resistor between the load and the circuit ground. The voltage dropping across the resistor is amplified by different amplifier circuits with the TPA653x. V_{REF} can be used to add bias voltage to output voltage. Particular attention must be paid to the matching and precision of R1, R2, R3, and R4, to maximize the accuracy of the measurement.

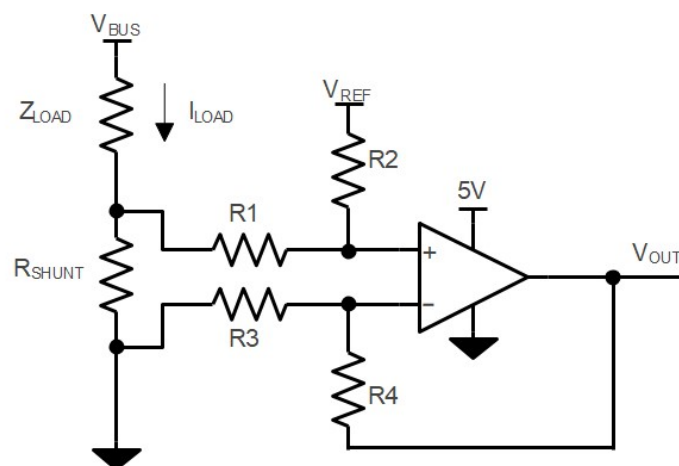

$$V_{OUT} = (I_{LOAD} \times R_{SHUNT}) \times (R2 / R1) + V_{REF}$$


$$\text{When } R3 = R1, R2 = R4, R_{SHUNT} \ll R1$$

Figure 28. Dual-Supply Operation Connections

Power Supply Recommendations

Place 0.1- μ F bypass capacitors close to the power supply pins to reduce coupling errors from the noise or high-impedance power supplies.

Tape and Reel Information

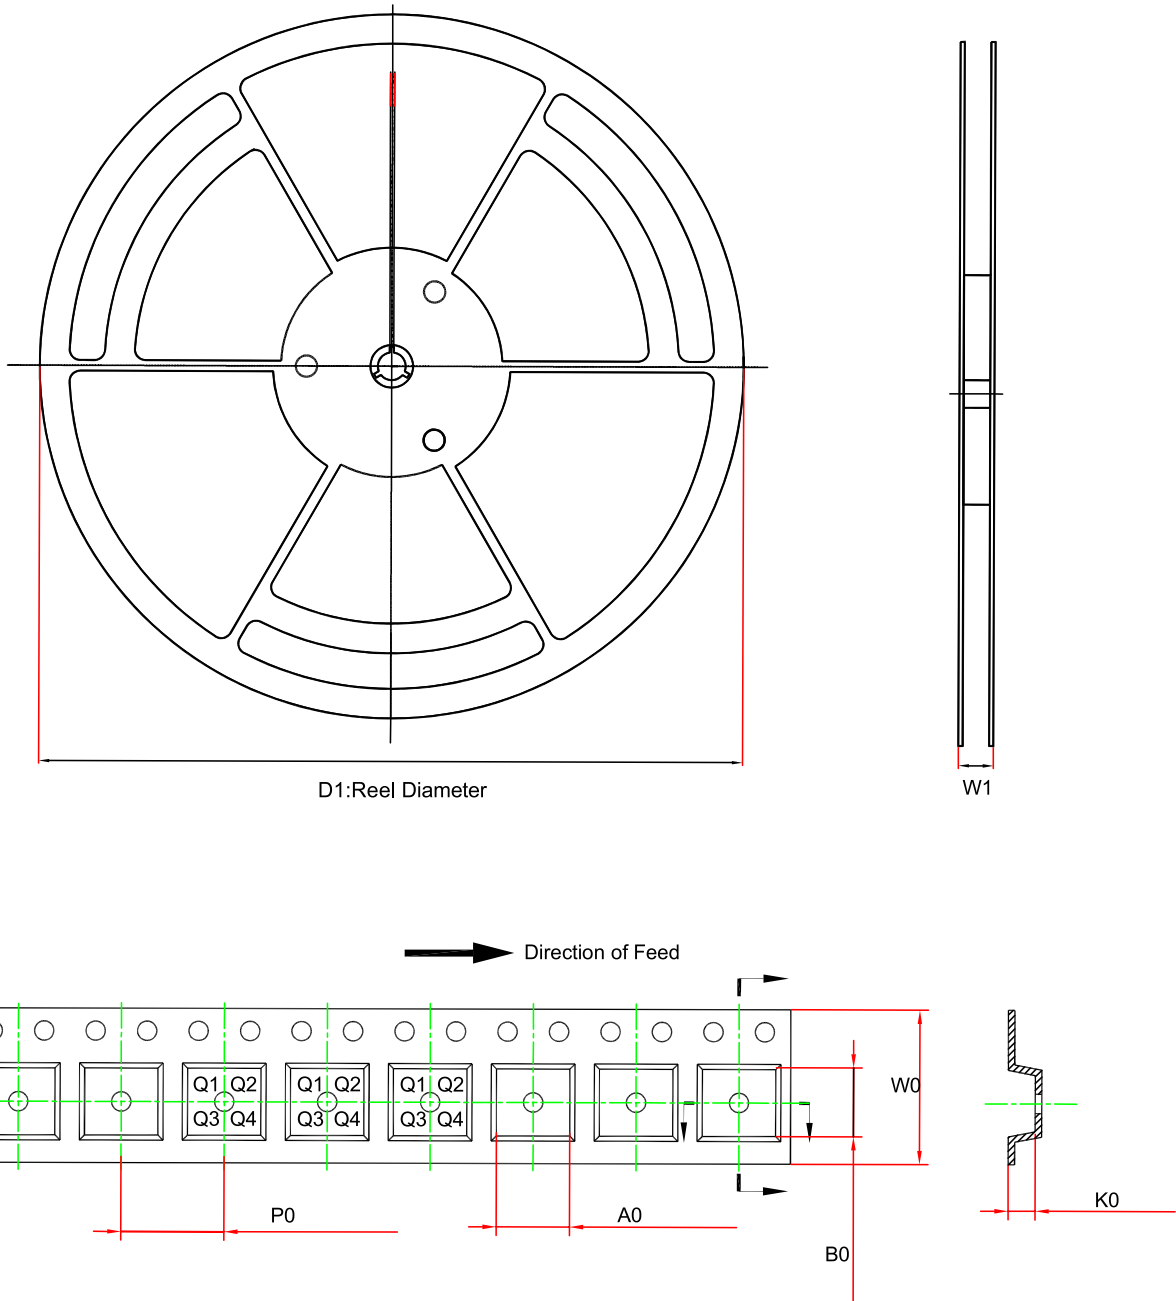


Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm) ⁽¹⁾	B0 (mm) ⁽¹⁾	K0 (mm) ⁽¹⁾	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPA6531-SC5R	SOT353 (SC70-5)	178	12.1	2.4	2.5	1.2	4	8	Q3
TPA6531-S5TR	SOT23-5	180	12	3.3	3.25	1.4	4	8	Q3
TPA6531U-S5TR	SOT23-5	180	12	3.3	3.25	1.4	4	8	Q3
TPA6531N-S6TR	SOT23-6	180	12	3.3	3.2	1.4	4	8	Q3





Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm) ⁽¹⁾	B0 (mm) ⁽¹⁾	K0 (mm) ⁽¹⁾	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPA6531N-SC6R	SOT363	178	12.1	2.4	2.5	1.2	4	8	Q3
TPA6532-SO1R	SOP8	330	17.6	6.5	5.4	2	8	12	Q1
TPA6532-VS1R	MSOP8	330	17.6	5.3	3.4	1.3	8	12	Q1
TPA6532-DF4R	DFN2X2-8	180	12.5	2.3	2.3	1.1	4	8	Q2
TPA6532-TS1R	TSSOP8	330	17.6	6.8	3.4	1.8	8	12	Q1
TPA6534-SO2R	SOP14	330	21.6	6.5	9.0	2.1	8	16	Q1
TPA6534-TS2R	TSSOP14	330	17.6	6.8	5.5	1.5	8	12	Q1
TPA6534U-QF4R	QFN3×3-16	330.0	17.6	3.3	3.3	1.1	8.0	12.0	Q1

(1) The value is for reference only. Contact the 3PEAK factory for more information.

Package Outline Dimensions

SOT353 (SC70-5)




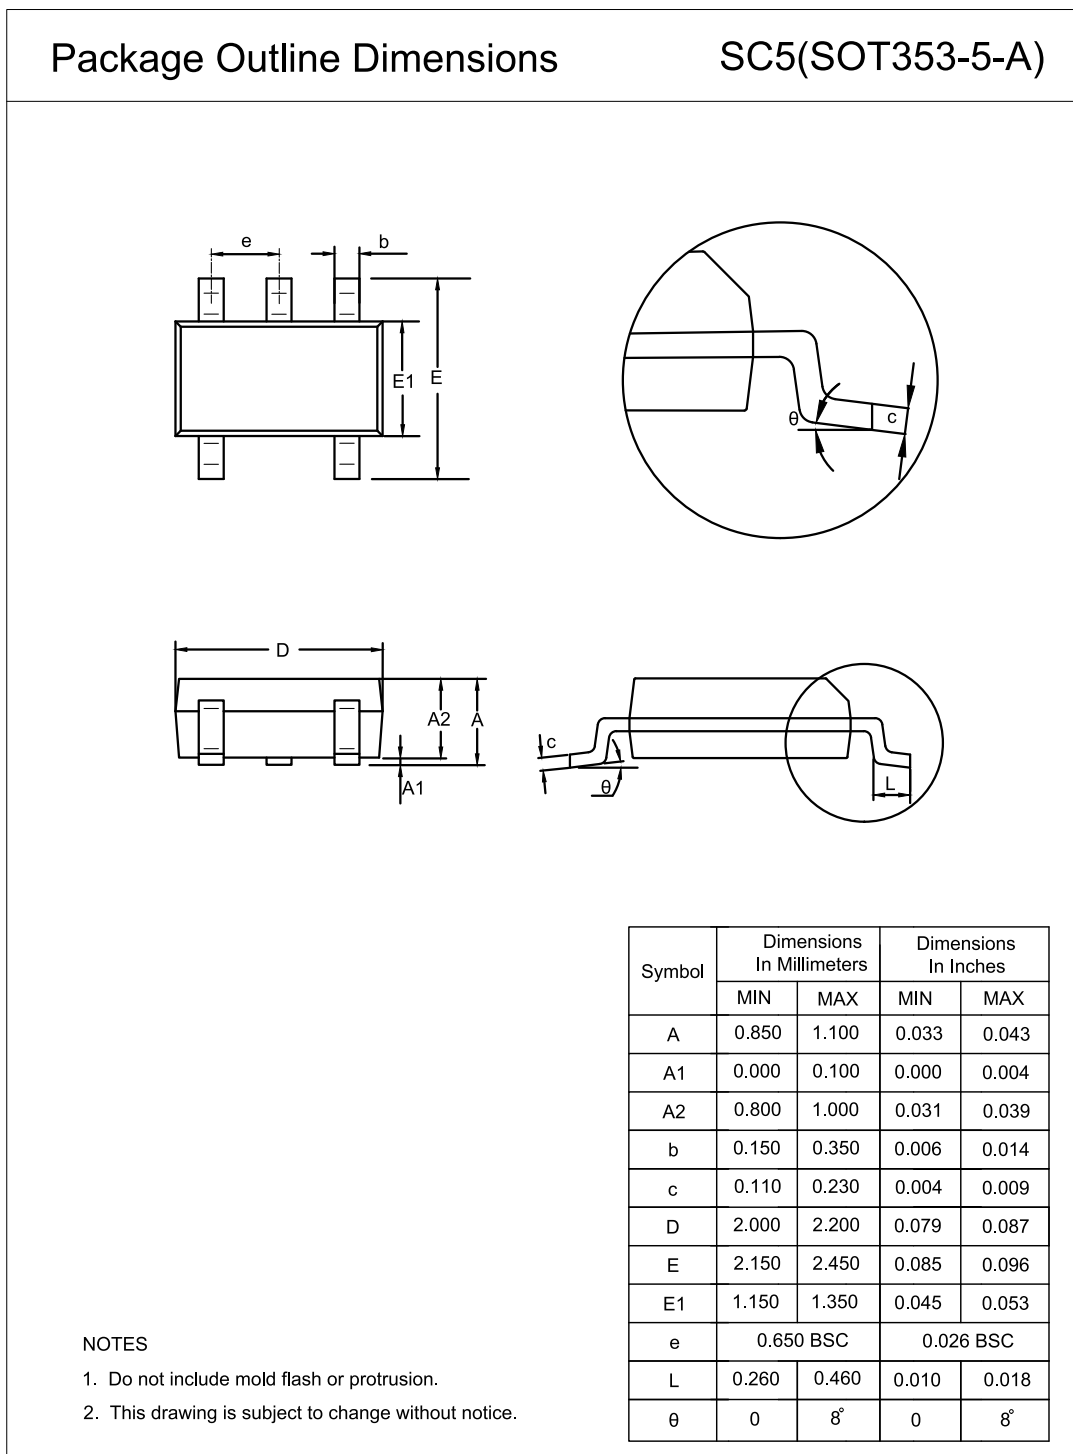


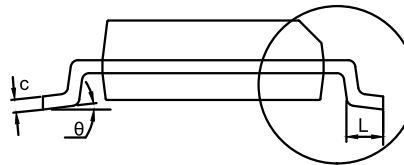SOT363 (SC70-6)
Package Outline Dimensions
SC6(SOT363-6-A)


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.850	1.100	0.033	0.043
A1	0.000	0.100	0.000	0.004
A2	0.800	1.000	0.031	0.039
b	0.150	0.350	0.006	0.014
c	0.080	0.230	0.003	0.009
D	2.000	2.200	0.079	0.087
E	2.150	2.450	0.085	0.096
E1	1.150	1.350	0.045	0.053
e	0.650 BSC		0.026 BSC	
L	0.260	0.460	0.010	0.018
θ	0	8°	0	8°





NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

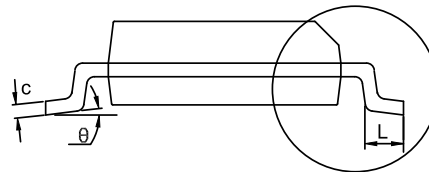SOT23-5
Package Outline Dimensions
S5T(SOT23-5-A)

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

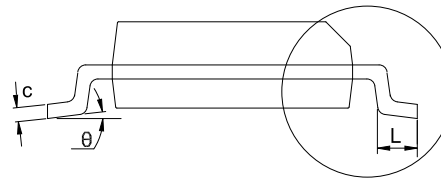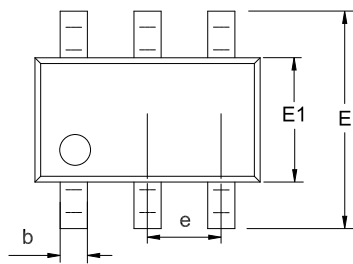
Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.150	0.000	0.006
A2	1.000	1.200	0.039	0.047
b	0.280	0.500	0.011	0.020
c	0.100	0.230	0.004	0.009
D	2.820	3.020	0.111	0.119
E	2.600	3.000	0.102	0.118
E1	1.500	1.720	0.059	0.068
e	0.950 BSC		0.037 BSC	
L	0.300	0.600	0.012	0.024
θ	0	8°	0	8°

SOT23-6
Package Outline Dimensions
S6T(SOT23-6-A)


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.150	0.000	0.006
A2	1.000	1.200	0.039	0.047
b	0.280	0.500	0.011	0.020
c	0.100	0.230	0.004	0.009
D	2.820	3.020	0.111	0.119
E	2.600	3.000	0.102	0.118
E1	1.500	1.720	0.059	0.068
e	0.950 BSC		0.037 BSC	
L	0.300	0.600	0.012	0.024
θ	0	8°	0	8°

NOTES





1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

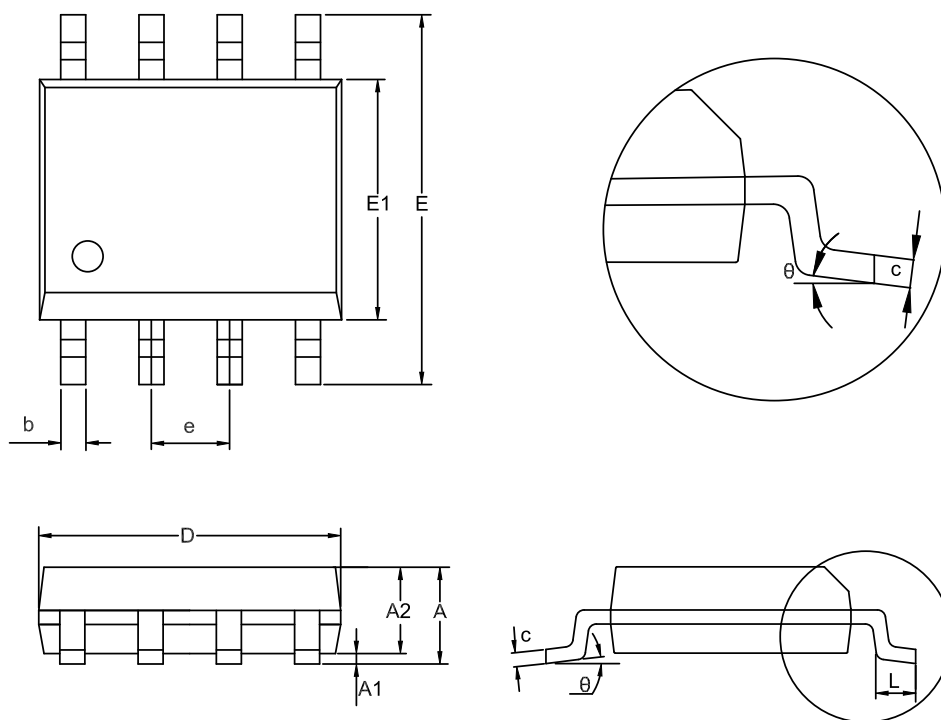SOP8
Package Outline Dimensions
SO1(SOP-8-A)


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.050	0.250	0.002	0.010
A2	1.250	1.550	0.049	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.700	5.100	0.185	0.201
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270 BSC		0.050 BSC	
L	0.400	1.000	0.016	0.039
θ	0	8°	0	8°

NOTES




1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

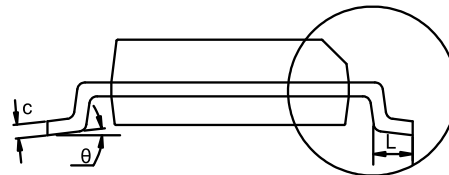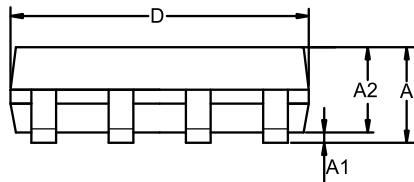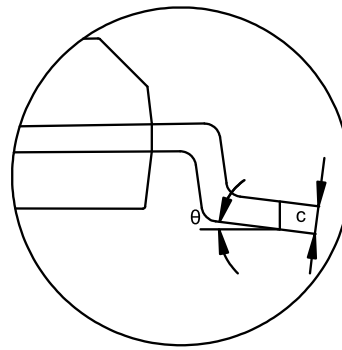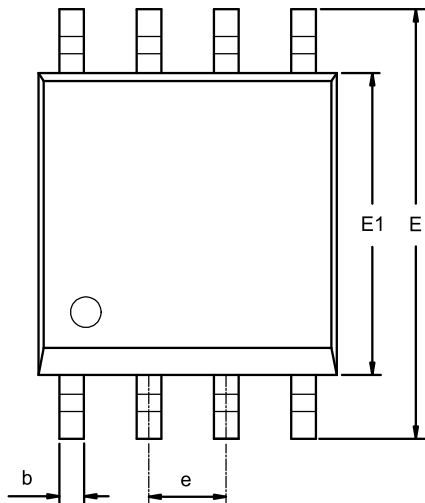MSOP8
Package Outline Dimensions
VS1(MSOP-8-A)


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.800	1.100	0.031	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	4.700	5.100	0.185	0.201
E1	2.900	3.100	0.114	0.122
e	0.650 BSC		0.026 BSC	
L	0.400	0.800	0.016	0.031
θ	0	8°	0	8°

NOTES


1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

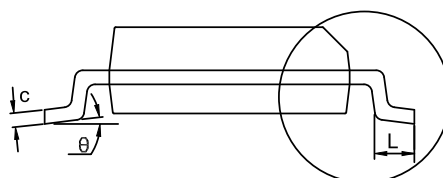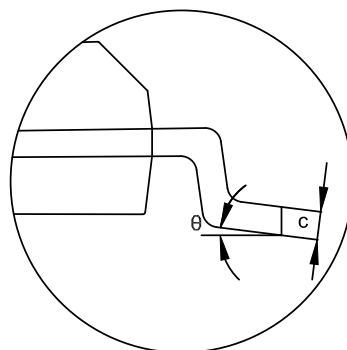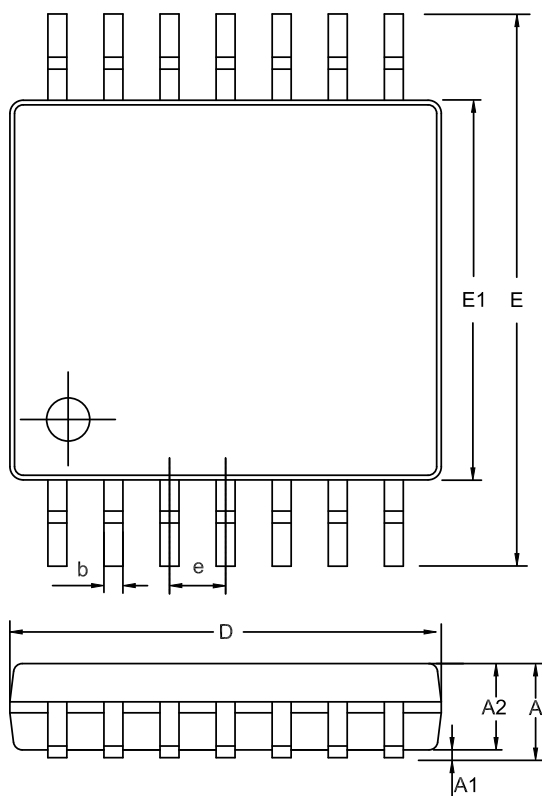TSSOP14
Package Outline Dimensions
TS2(TSSOP-14-A)


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.900	1.200	0.035	0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.050	0.031	0.041
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
D	4.900	5.100	0.193	0.201
E	6.200	6.600	0.244	0.260
E1	4.300	4.500	0.169	0.177
e	0.650 BSC		0.026 BSC	
L	0.450	0.750	0.018	0.030
θ	0	8°	0	8°

NOTES


1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

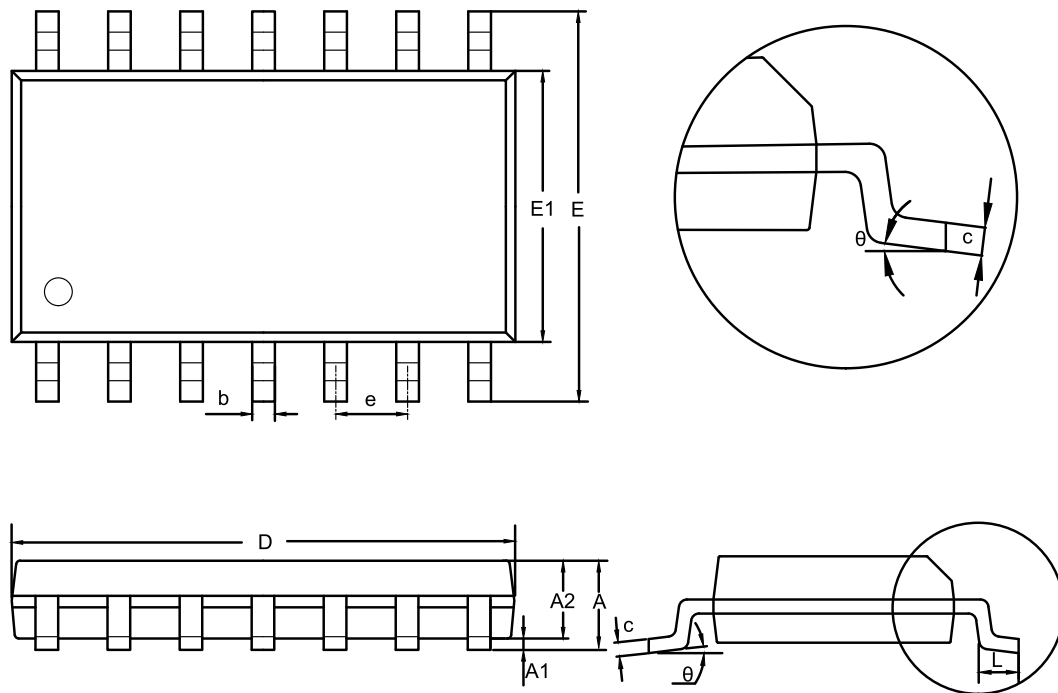SOP14
Package Outline Dimensions
SO2(SOP-14-A)


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.050	0.250	0.002	0.010
A2	1.250	1.650	0.049	0.065
b	0.310	0.510	0.012	0.020
c	0.100	0.250	0.004	0.010
D	8.450	8.850	0.333	0.348
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0	8°	0	8°

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

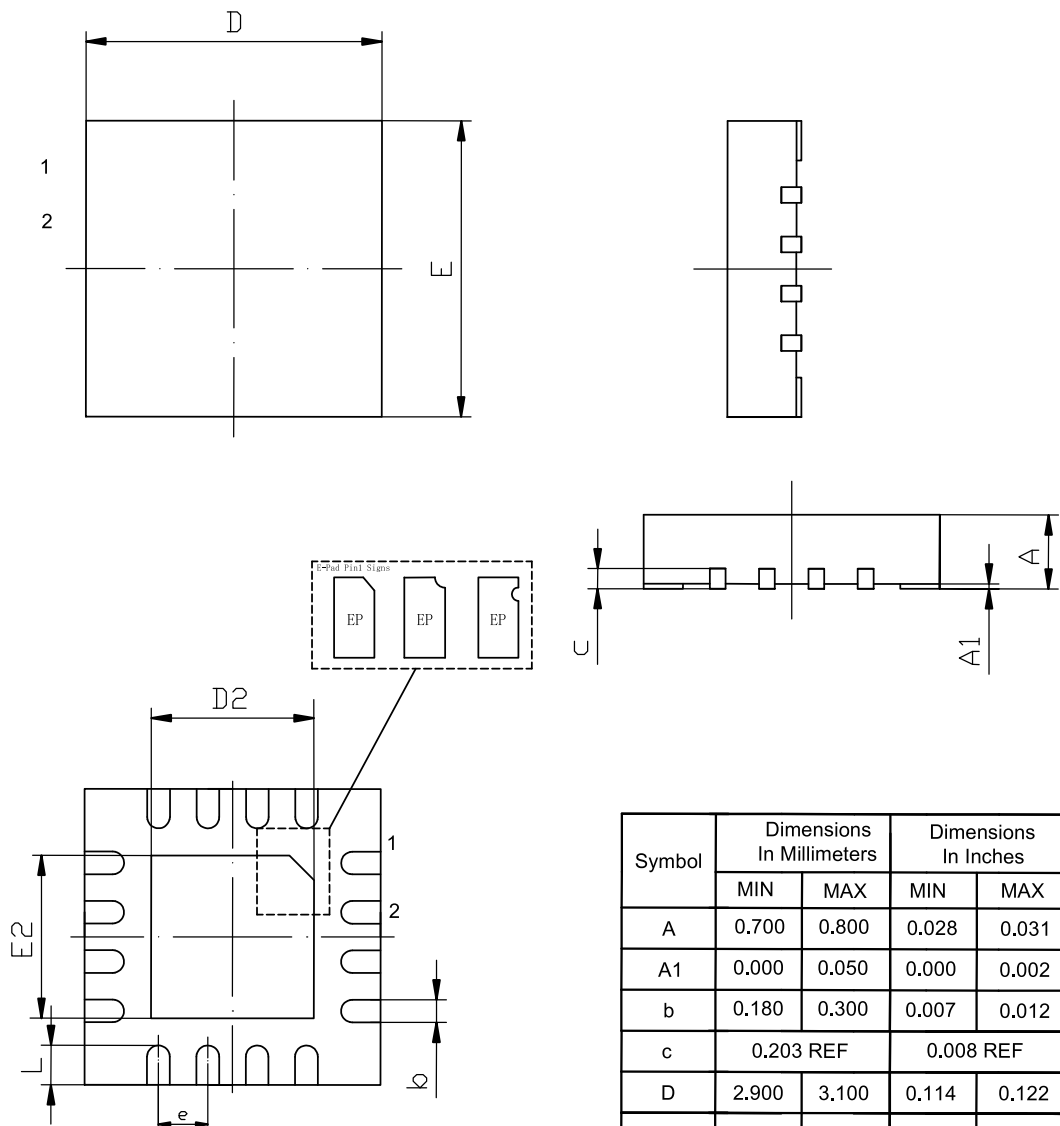QFN3X3-16
Package Outline Dimensions
QFN(QFN3X3-16-B)

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.
3. The many types of E-pad Pin1 signs may appear in the product.

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
b	0.180	0.300	0.007	0.012
c	0.203 REF		0.008 REF	
D	2.900	3.100	0.114	0.122
D2	1.600	1.800	0.063	0.071
E	2.900	3.100	0.114	0.122
E2	1.600	1.800	0.063	0.071
e	0.500 BSC		0.020 BSC	
L	0.250	0.500	0.010	0.020

Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPA6531-SC5R	-40 to 125°C	SOT353 (SC70-5)	653	3	Tape and Reel, 3000	Green
TPA6531U-SC5R ⁽¹⁾	-40 to 125°C	SOT353 (SC70-5)	63U	3	Tape and Reel, 3000	Green
TPA6531-S5TR	-40 to 125°C	SOT23-5	653	3	Tape and Reel, 3000	Green
TPA6531U-S5TR	-40 to 125°C	SOT23-5	63U	3	Tape and Reel, 3000	Green
TPA6531N-S6TR	-40 to 125°C	SOT23-6	63N	3	Tape and Reel, 3000	Green
TPA6531N-SC6R ⁽¹⁾	-40 to 125°C	SOT363 (SC70-6)	63N	3	Tape and Reel, 3000	Green
TPA6532-SO1R	-40 to 125°C	SOP8	A6532	3	Tape and Reel, 4000	Green
TPA6532-DF4R ⁽¹⁾	-40 to 125°C	DFN2X2-8	653	3	Tape and Reel, 3000	Green
TPA6532-TS1R ⁽¹⁾	-40 to 125°C	TSSOP8	A6532	3	Tape and Reel, 3000	Green
TPA6532-VS1R	-40 to 125°C	MSOP8	A6532	3	Tape and Reel, 3000	Green
TPA6534-SO2R	-40 to 125°C	SOP14	A6534	3	Tape and Reel, 2500	Green
TPA6534-TS2R	-40 to 125°C	TSSOP14	A6534	3	Tape and Reel, 3000	Green
TPA6534U-QF4R	-40 to 125°C	QFN3×3-16	653U	3	Tape and Reel, 4000	Green

(1) For future products, contact the 3PEAK factory for more information and samples.

Green: 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

IMPORTANT NOTICE AND DISCLAIMER

Copyright© 3PEAK 2012-2025. All rights reserved.

Trademarks. Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

Performance Information. Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

Disclaimer. 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.

This page intentionally left blank