


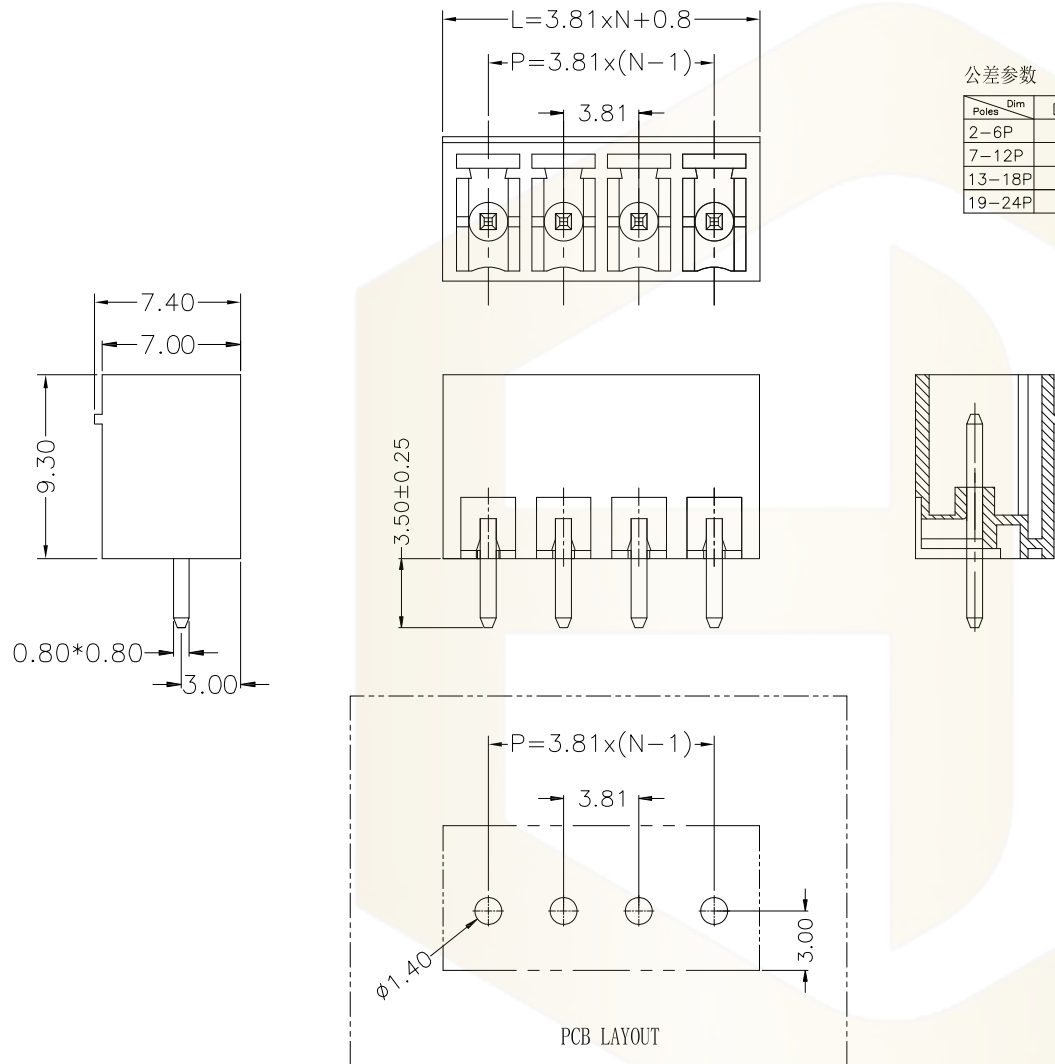

公差参数

Poles	Dim	Dim P	Dim L
2-6P		±0.10	±0.20
7-12P		±0.20	±0.30
13-18P		±0.25	±0.40
19-24P		±0.30	±0.50

材料及电镀

- ①. 塑件主体: PA66, UL94V-0
②. 焊 针: 黄铜, 镀镍

电气性能

额定电压: 300V
额定电流: 8A
接触电阻: 20mΩ (Max)
绝缘电阻: 500MΩ \DC1000V
耐 电 压: AC1500V\1Min

机械性能

温度范围: -40℃ ~ +105℃
瞬时温度: +250℃, 5秒

Ordering Information

HC15EDG	*	*	-	*	-	NP	-	*
Type	Pin	Pitch	No. of	Colour				
2-6P	2.54±0.50mm	2.54±0.50mm	2-6P	Yellow				
7-12P	3.81±0.81mm	3.81±0.81mm	7-12P	Orange				
13-18P	5.08±0.81mm	5.08±0.81mm	13-18P	Red				
19-24P	7.62±0.81mm	7.62±0.81mm	19-24P	Black				

			GENERAL TOLERANCE		制 图	07	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD		
			DIM	TOL	审 核				
			X.X	±0.30	批 准				
			X.XX	±0.20	比 例				
1	初版发行		X.XXX	±0.10	SCALE		产品名称	3.81 单排 插拔式 接线端子	版 本
序号	变更内容	日期	Angle	±3.0°	投 影		产品料号	HC15EDGVC-3.81-NP-X	REV.
No.	MODIFY CONTENT	MODIFY DATE			Projection		PART NO.		
							材料		单 位
							MATERIAL		UNITS
									页 次
									SHEET
									1/1