

FEATURES

30V, 3.8A, $R_{DS(ON)}=45m\Omega@V_{GS}=10V$

Improved dv/dt capability

Fast switching

Green Device Available


APPLICATION

MB / VGA / Vcore


Load Switch

Hand-Held Instrument

V_{DSS} 30 V
 I_D 3.8 A
 $R_{DS(ON)}$ 45 m Ω



SOT23-3L top view



Schematic Diagram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings ($T_C=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	30	V
V_{GS}	Gate-Source Voltage	± 12	V
I_D	Drain Current – Continuous ($T_A=25^\circ\text{C}$)	3.8	A
	Drain Current – Continuous ($T_A=70^\circ\text{C}$)	3.0	A
I_{DM}	Drain Current – Pulsed ¹	12	A
P_D	Power Dissipation ($T_A=25^\circ\text{C}$)	1.3	W
	Power Dissipation – Derate above 25°C	2.22	mW/ $^\circ\text{C}$
T_{STG}	Storage Temperature Range	-50 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-50 to 150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	450	$^\circ\text{C/W}$

Electrical characteristics ($T_J=25^{\circ}\text{C}$ unless otherwise noted)

Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=250\mu A$	30	---	---	V
$\Delta BV_{DSS}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_D=1\text{mA}$	---	0.018	---	$V/^{\circ}\text{C}$
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=30V$, $V_{GS}=0V$, $T_J=25^{\circ}\text{C}$	---	---	1	μA
		$V_{DS}=24V$, $V_{GS}=0V$, $T_J=125^{\circ}\text{C}$	---	---	10	μA
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 12V$, $V_{DS}=0V$	---	---	± 100	nA

On Characteristics

$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=10V$, $I_D=3A$	---	45	55	$m\Omega$
		$V_{GS}=4.5V$, $I_D=2A$	---	48	65	$m\Omega$
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=250\mu A$	0.5	1.0	2.5	V
$\Delta V_{GS(th)}$	$V_{GS(th)}$ Temperature Coefficient		---	-3.2	---	$mV/^{\circ}\text{C}$
gfs	Forward Transconductance	$V_{DS}=10V$, $I_D=2A$	---	2.3	---	S

Dynamic and switching Characteristics

Q_g	Total Gate Charge ^{2, 3}	$V_{DS}=24V$, $V_{GS}=10V$, $I_D=1A$	---	3.1	---	nC
Q_{gs}	Gate-Source Charge ^{2, 3}		---	0.1	---	
Q_{gd}	Gate-Drain Charge ^{2, 3}		---	1.7	---	
$T_{d(on)}$	Turn-On Delay Time ^{2, 3}	$V_{DD}=24V$, $V_{GS}=10V$, $R_G=3.3\Omega$ $I_D=1A$	---	2.2	---	ns
T_r	Rise Time ^{2, 3}		---	6.9	---	
$T_{d(off)}$	Turn-Off Delay Time ^{2, 3}		---	15.2	---	
T_f	Fall Time ^{2, 3}		---	4.5	---	
C_{iss}	Input Capacitance	$V_{DS}=15V$, $V_{GS}=0V$, $F=1\text{MHz}$	---	250	---	pF
C_{oss}	Output Capacitance		---	40	---	
C_{rss}	Reverse Transfer Capacitance		---	20	---	

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current	$V_G=V_D=0V$, Force Current	---	---	3.8	A
I_{SM}	Pulsed Source Current		---	---	7.6	A
V_{SD}	Diode Forward Voltage	$V_{GS}=0V$, $I_S=1A$, $T_J=25^{\circ}\text{C}$	---	---	1.2	V

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. The data tested by pulsed , pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
3. Essentially independent of operating temperature.

RATING AND CHARACTERISTIC CURVES

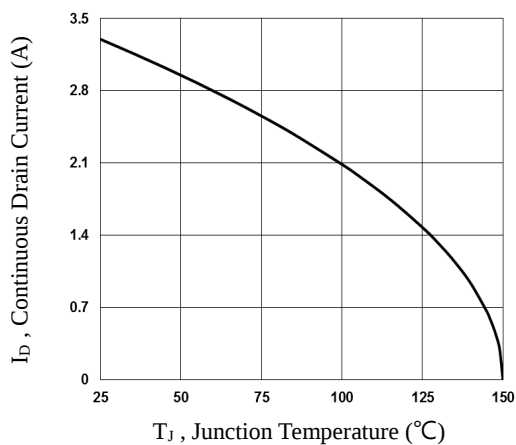


Fig.1 Continuous Drain Current vs. T_J

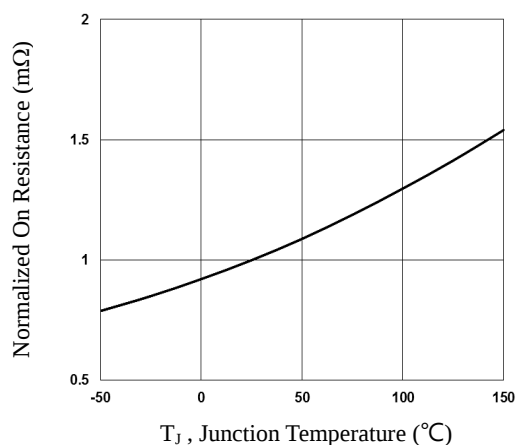


Fig.2 Normalized $R_{DS(on)}$ vs. T_J

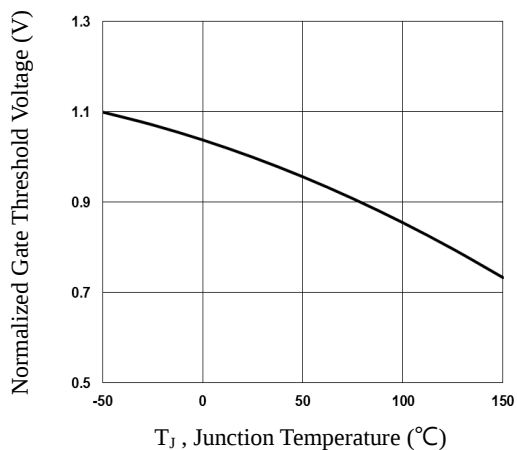


Fig.3 Normalized V_{th} vs. T_J

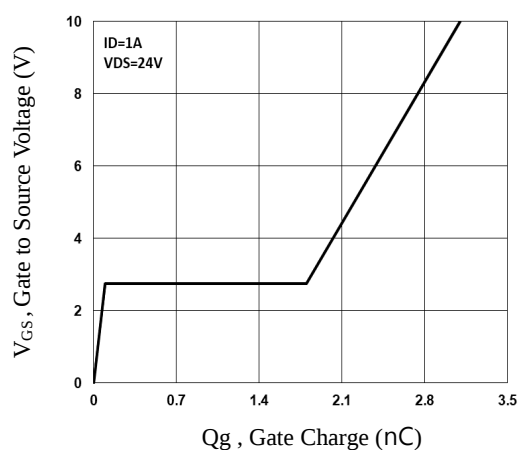


Fig.4 Gate Charge Waveform

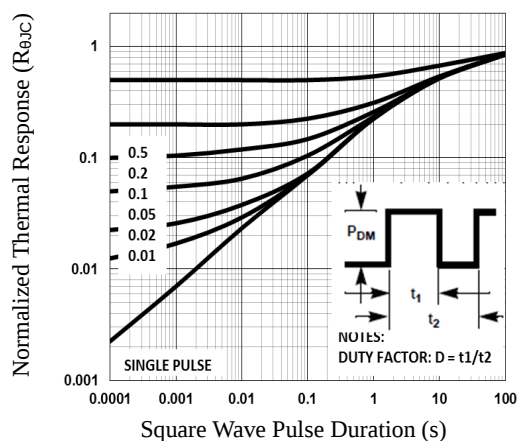


Fig.5 Normalized Transient Impedance

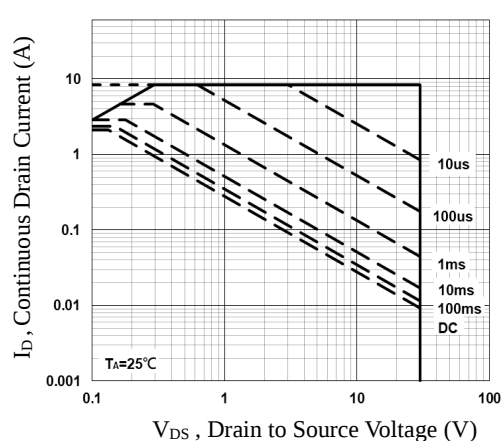


Fig.6 Maximum Safe Operation Area

RATING AND CHARACTERISTIC CURVES

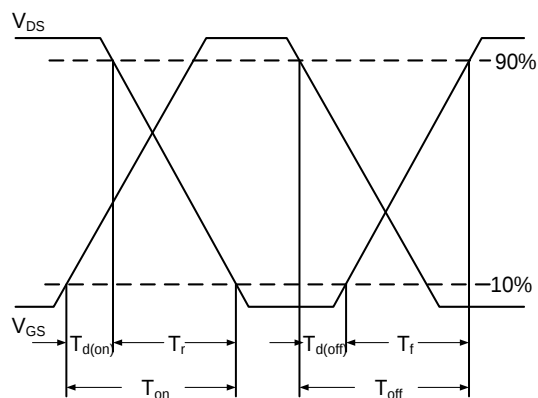


Fig.7 Switching Time Waveform


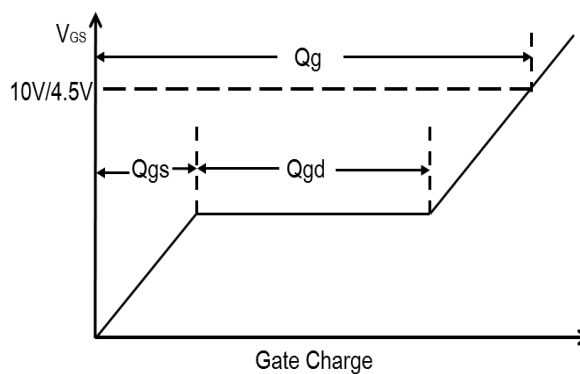


Fig.8 Gate Charge Waveform


Soldering parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150 °C
	-Temperature Max($T_{s(max)}$)	+200 °C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3 °C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3 °C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217 °C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5) °C
Time within 5 °C of actual Peak Temp (t_P)		30 secs. Max
Ramp-down Rate		6 °C/sec. Max
Time 25 °C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260 °C

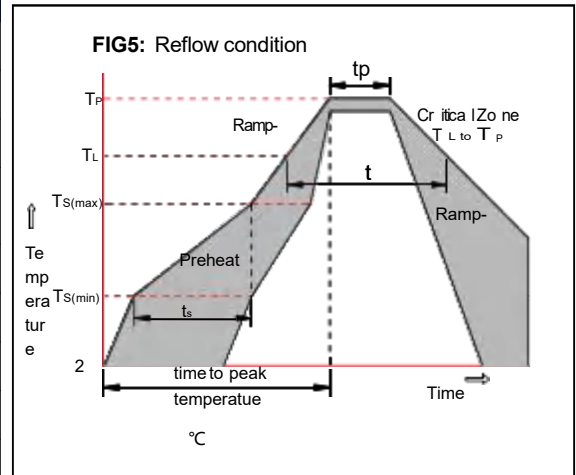


Package Dimensions & Suggested Pad Layout

SOT23-3L

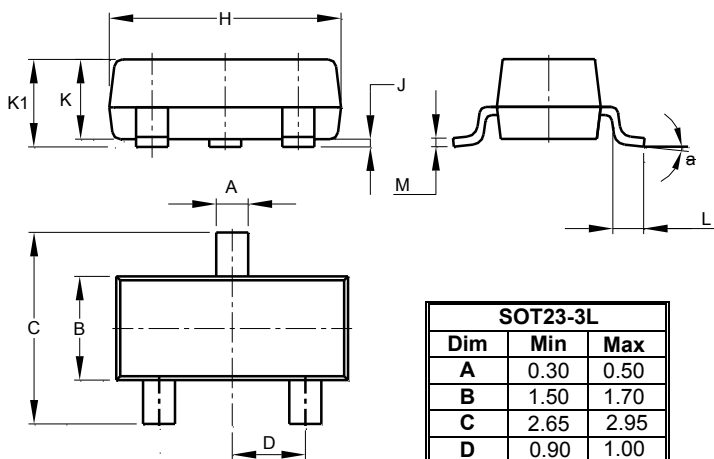


SOT23-3L		
Dim	Min	Max
A	0.30	0.50
B	1.50	1.70
C	2.65	2.95
D	0.90	1.00
H	2.82	3.02
J		0.10
K	1.05	1.15
K1	1.05	1.25
L	0.30	0.60
M	0.10	0.20
a	0°	8°
All Dimensions in mm		

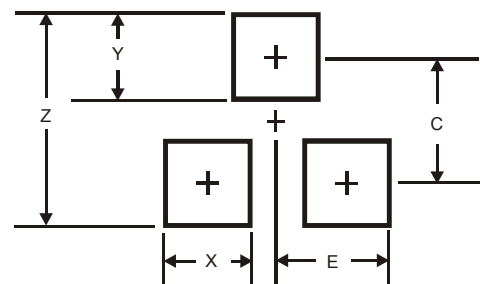

Dimensions	SOT23-3L
Z	3.3
X	0.9
Y	1.0
C	2.3
E	1.40

Tape & reel specification

Tape

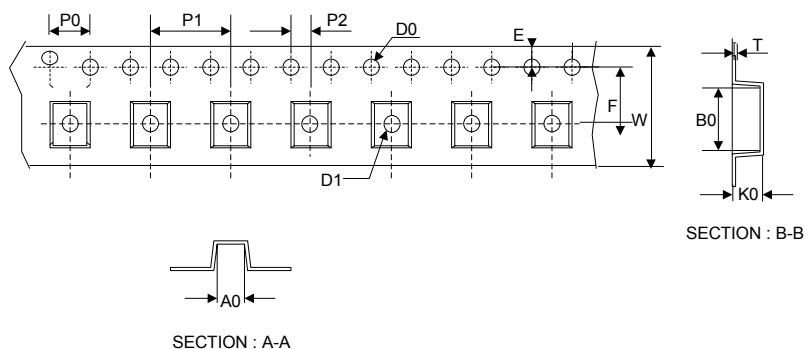

Symbol	Dimension (mm)
P0	4.00±0.20
P1	4.00±0.20
P2	2.00±0.20
D0	1.55±0.20
D1	1.05±0.20
E	1.55±0.20
F	3.60±0.20
W	8.00±0.20
A0	3.80±0.20
B0	3.50±0.20
K0	1.55±0.20
T	0.25±0.15
D2	178.0±5.0
D3	55Min.
D4	R24.0±3.0
G	R82.0±3.0
I	13.0±2.0
W1	11.0±3.0
Quantity: 3000PCS	

7" Reel

