


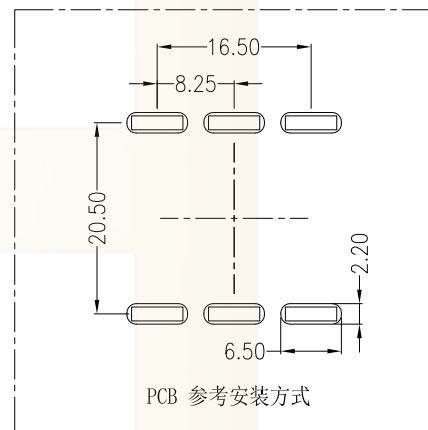

NOTES:

备注

- 1.Brass or purple copper,tin-plating
黄铜, 镀锡
- 2.Wire screw hole M8 (M5, M6)
压线螺孔M8 (M5, M6) 可定制
- 3.Current Rating: 200A
额定电流:200A
- 4.There shall be no defects such as
pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
- 5.Unmarked dimensions refer to tolerances
未标注的尺寸参考公差
6. 扭矩: 3.39Nm

Ordering Information

Type	Thickness	Screw Thread	Welding Feet	Series		Product No.	Material
(種類)	(厚さ)	(ねじ)	(溶接)	(系列)		(製品番号)	(材質)
1) Crest Nut (頂上ナット)	1.2mm 1.5mm 2mm	M4 M5 M6	1620 1620 1620	1620 1620 1620			鋼材 (鋼材)
2) Crest Washer (頂上ワッシャー)	1.2mm 1.5mm 2mm	M4 M5 M6	1620 1620 1620	1620 1620 1620			鋼材 (鋼材)



工程专用章			GENERAL TOLERANCE		制 图 DRAWING		07		 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD						
			DIM TOL		审 核 CHECK										
						5 or more	±0.35	批 准 APPROVAL		产品名称 TITLE		PCB 焊接端子 厚度1.5 插板 铆螺母 MS 6焊脚 22x22x20mm		版 本 REV.	A
			1	初版发行			2~5	±0.25	比 例 SCALE		产品料号 PART NO.		HC-RN1586-2222-D742-07		单 位 UNITS
序号 No.	变更内容 MODIFY CONTENT		日期 MODIFY DATE	Angle	±3.0°	投 影 Projection				材 料 MATERIAL		页 次 SHEET		1/1	