
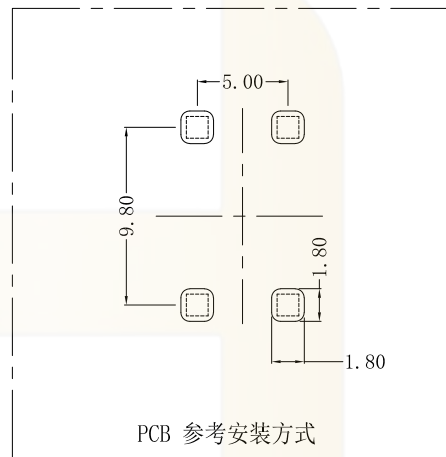
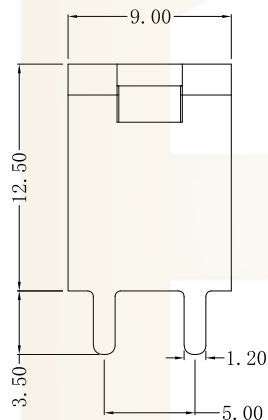






NOTES:

备注

- 1.Brass or purple copper,tin-plating
黄铜或紫铜, 镀锡
- 2.Wire screw hole M4 (M5, M6)
压线螺孔M4 (M5, M6) 可定制
- 3.Current Rating: 80A
额定电流:80A
- 4.There shall be no defects such as
pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
- 5.Unmarked dimensions refer to tolerances
未标注的尺寸参考公差
6. 扭矩: 1.47Nm

Ordering Information

HC - * ** * - **** - * ** * - 07

Type	Thickness	Screw Thread	Welding Feet	Series	Welding Feet	Product No.	Material
HC=Full Tooth (插牙)	0.5~1.0mm	0.5~1.0mm	0.5~1.0mm	0.5~1.0mm	0.5~1.0mm	0.5~1.0mm	0.5~1.0mm
HC=Hole Nut (螺螺母)	1.0~1.5mm	1.0~1.5mm	1.0~1.5mm	1.0~1.5mm	1.0~1.5mm	1.0~1.5mm	1.0~1.5mm
HC=Hole Gasket (螺垫片)	2.0~2.5mm	2.0~2.5mm	2.0~2.5mm	2.0~2.5mm	2.0~2.5mm	2.0~2.5mm	2.0~2.5mm



工程专用章		GENERAL TOLERANCE	制图	07	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD		
		DIM TOL	审核		产品名称	PCB 焊接端子 厚度1.2 插板 铜垫片	版本
		5 or more ±0.35	CHECK		TITLE	M4 4焊脚 11x9x16mm	REV.
		2~5 ±0.25	批准		产品料号	HC-RG1244-1109-D541-07	单位
		0~2 ±0.15	比例		PART NO.		mm
		Angle ±3.0°	投影		材料		页次
序号	变更内容	日期	投影		MATERIAL		SHEET
No.	MODIFY CONTENT	MODIFY DATE	Projection				1/1