

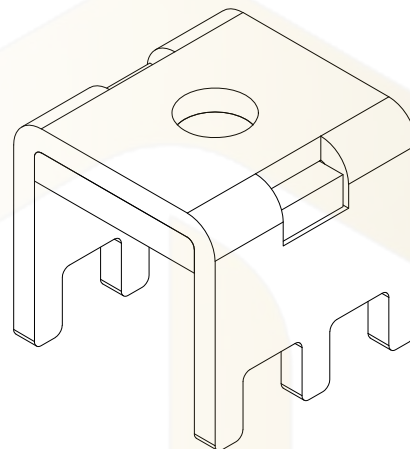


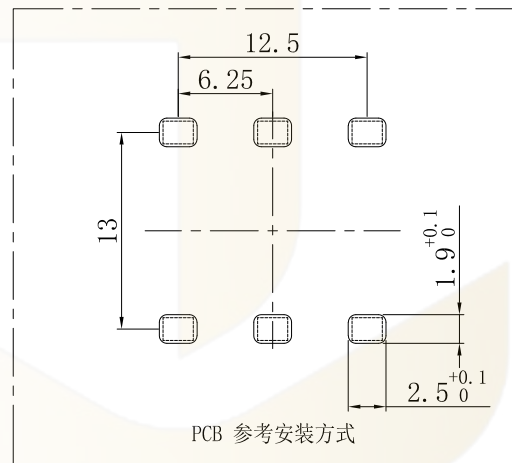

NOTES:

备注


- 1.Brass or purple copper,Bright tin-plating
黄铜或紫铜, 镀亮锡
- 2.Wire screw hole M5
压线螺孔M5
- 3.Current Rating: 100A
额定电流:100A
4. There shall be no defects such as
pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
- 5.Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

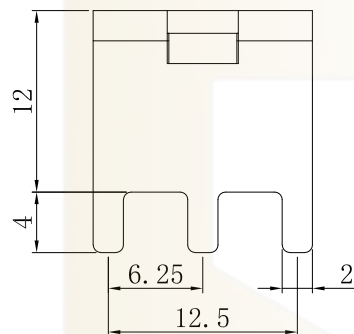

Ordering Information

Type	Thickness	Screw Thread	Welding Feet	Series	Tag	Product No.	Material
① Steel Tee	① 0.00mm	① 1/2"	① 1/2"	14020-14020mm	① Tag	① 07	① 鋼板
② Steel Nut	② 0.00mm	② 1/2"	② 1/2"		② Tag	② 07	② 鋼板
③ Steel	③ 0.00mm	③ 1/2"	③ 1/2"		③ Tag	③ 07	③ 鋼板
④ Steel Gasket	④ 0.00mm	④ 1/2"	④ 1/2"		④ Tag	④ 07	④ 鋼板



工程专用章				GENERAL TOLERANCE	制 图 DRAWING	07					 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD		
				DIM TOL	审 核 CHECK								
				5 or more ±0.35	批 准 APPROVAL	产品名称 TITLE	PCB 焊接端子 厚度1.5 插板 铜垫片 M5 6焊脚 14.5x14.5x16mm	版 本 REV.	A				
			1	初版发行	2~5 ±0.25 0~2 ±0.15	比 例 SCALE	产品料号 PART NO.	HC-RG1556-1414-D709-07	单 位 UNITS	mm			
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°	投 影 Projection		材 料 MATERIAL				页 次 SHEET	1/1		