
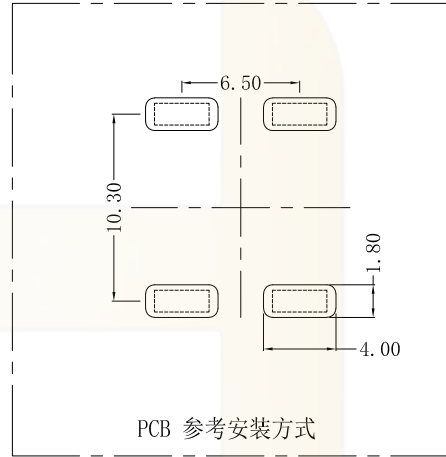
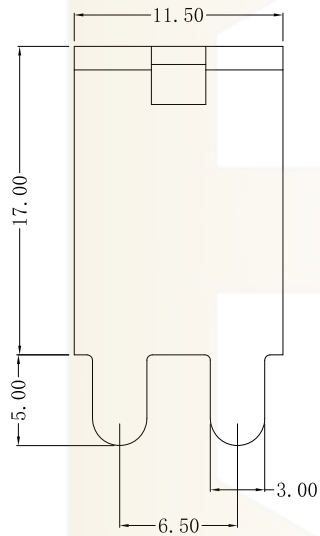

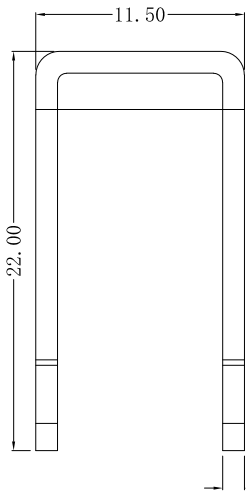




NOTES:

备注

1. Brass or purple copper, tin-plating
黄铜或紫铜, 镀锡
2. Wire screw hole M4 (M3, M5)
压线螺孔M4 (M3, M5) 可定制
3. Current Rating: 70A
额定电流: 70A
4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差
6. 扭矩: 1.47Nm

Ordering Information

HC - * ** * - **** - * ** * - 07

Type	Thickness	Screw Thread	Welding Feet	Series	Welding Feet	Product No.	Material
HC=Full Teeth (插牙)	0.5~1.0mm	0.5~1.0mm	0.5~1.0mm	0.5~1.0mm	0.5~1.0mm	0.5~1.0mm	0.5~1.0mm
HC=Hole Nut (螺螺母)	1.0~1.5mm	1.0~1.5mm	1.0~1.5mm	1.0~1.5mm	1.0~1.5mm	1.0~1.5mm	1.0~1.5mm
HC=Hole Gasket (螺垫片)	2.0~2.5mm	2.0~2.5mm	2.0~2.5mm	2.0~2.5mm	2.0~2.5mm	2.0~2.5mm	2.0~2.5mm



工程专用章

GENERAL TOLERANCE			制图	07	深圳市华灿天禄电子有限公司			
DIM TOL			审核		ShenzhenhuacantianluELECTRONICS CO.,LTD			
5 or more			批准		产品名称	PCB 焊接端子 厚度1.2 插板 铆垫片	版本	A
2~5			比例		TITLE	M4 4焊脚 11.5x11.5x22mm	REV.	
0~2			SCALE		产品料号	HC-RG1244-1111-D542-07	单位	mm
Angle			投影		PART NO.		页次	1/1
序号	变更内容	日期	材料		MATERIAL		SHEET	
No.	MODIFY CONTENT	MODIFY DATE	Projection					