

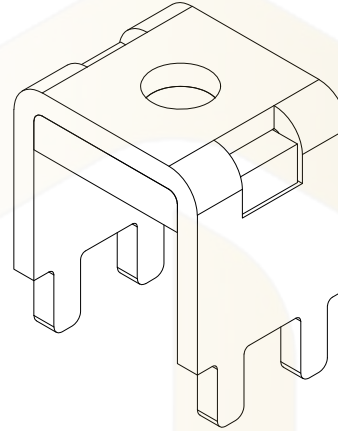
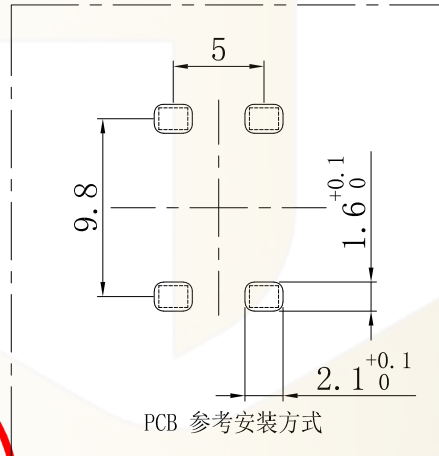


M4

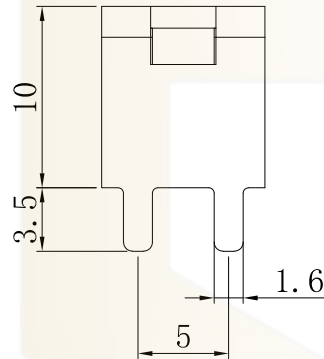

NOTES:
备注

1. Brass or purple copper, Bright tin-plating
黄铜或紫铜, 镀亮锡
2. Wire screw hole M4
压线螺孔M4
3. Current Rating: 70A
额定电流: 70A
4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

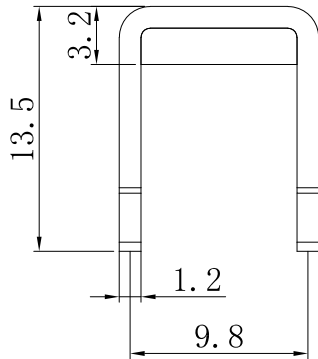

PCB 参考安装方式

Ordering Information

HC	-	*	**	*	*	-	****	-	*	***	*	-	07
Type	Thickness	Screw	Welding	Series	Welding	Product No.	Material						
Pin/Teeth	0.5mm	Thread	Feet	08080808	Pin/Teeth	Product No.	Material						
(Pin/Teeth)	1.0mm	(Thread)	(Feet)	16201620	(Pin/Teeth)	Product No.	Material						
(Pin/Teeth)	1.5mm	(Thread)	(Feet)		(Pin/Teeth)	Product No.	Material						
(Pin/Teeth)	2.0mm	(Thread)	(Feet)		(Pin/Teeth)	Product No.	Material						
(Pin/Teeth)	2.5mm	(Thread)	(Feet)		(Pin/Teeth)	Product No.	Material						
(Pin/Teeth)	3.0mm	(Thread)	(Feet)		(Pin/Teeth)	Product No.	Material						



		GENERAL TOLERANCE	制图	07	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD		
		DIM TOL	审核				
		5 or more ±0.35	批准		产品名称	PCB 焊接端子 厚度1.2 插板 铜垫片	版本
		2~5 ±0.25	APPROVAL		TITLE	M4 4焊脚 11x9x13.5mm	REV.
		0~2 ±0.15	比例		产品料号	HC-RG1244-1109-D509-07	UNIT
		Angle ±3.0°	SCALE		PART NO.		mm
序号	变更内容	日期	投影		MATERIAL		页次
No.	MODIFY CONTENT	MODIFY DATE	Projection				SHEET