

FEATURES

- * Ideal for surface mount applications
- * Easy pick and place
- * Built-in strain relief
- * High surge current capability

VOLTAGE RANGE

1000 Volts

CURRENT

1.0 Ampere

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solder plated, solderable per MIL-STD-202F method 208 guranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unieess otherwies specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Items	Symbol	2CZ4007	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	1000	V
Maximum RMS voltage	V_{RMS}	700	V
Maximum DC blocking voltage	V_{DC}	1000	V
Maximum average forward rectified current	$I_{F(AV)}$	1	A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	25	A
Thermal resistance from junction to lead ⁽¹⁾	$R_{\theta JL}$	35	°C / W
Operating junction range	T_J	-55 to +150	°C
storage temperature range	T_{STG}	-55 to +150	°C

Note 1: Mounted on PCB with 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas.

Electrical Characteristics (T_A = 25 °C unless otherwise noted)

Items	Test conditions	Symbol	Min	Type	Max	UNIT
Instantaneous forward voltage	$I_F=0.5A$	V_F	-	0.92	-	V
	$I_F=1A^{(2)}$			0.98	1.1	
Reverse current	$V_R=V_{DC}$	I_R	-	-	5	μA
					50	

Note 2: Pulse test:300 μs pulse width,1% duty cycle.

RATING AND CHARACTERISTIC CURVES

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

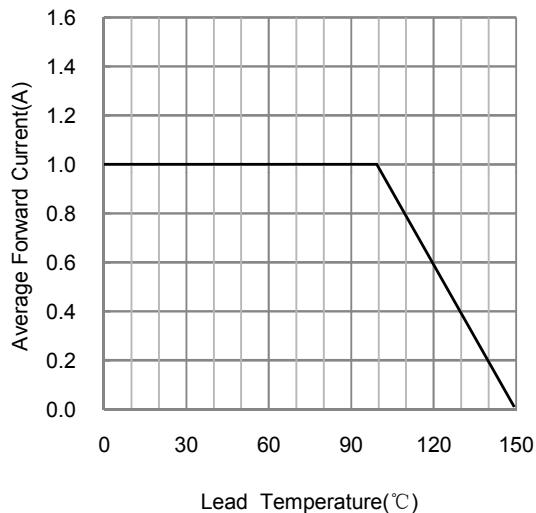


FIG.2-TYPICAL FORWARD CHARACTERISTICS

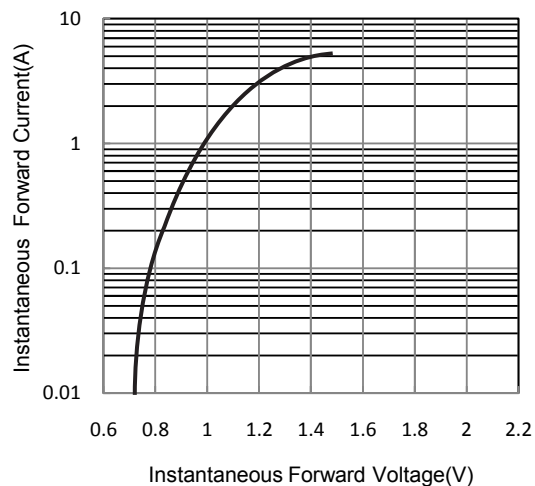


FIG.3 - TYPICAL REVERSE CHARACTERISTICS



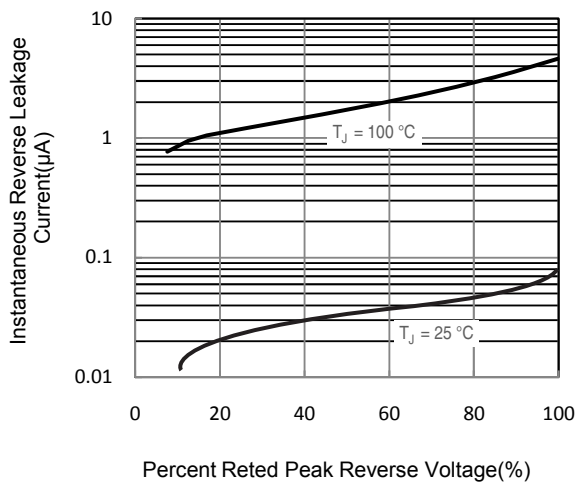


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

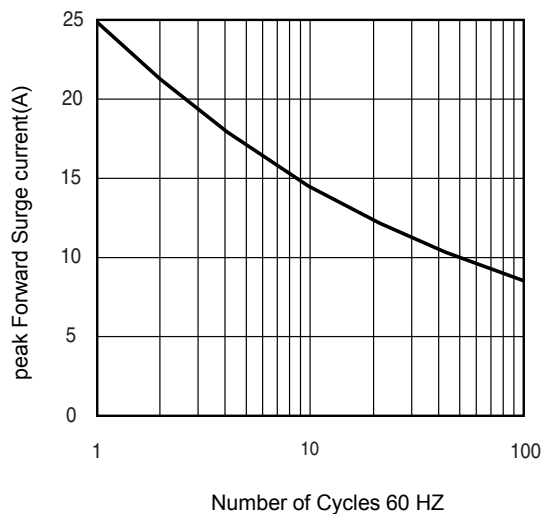


Soldering parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150 °C
	-Temperature Max($T_{s(max)}$)	+200 °C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3 °C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3 °C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217 °C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5) °C
Time within 5 °C of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6 °C/sec. Max
Time 25 °C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260 °C

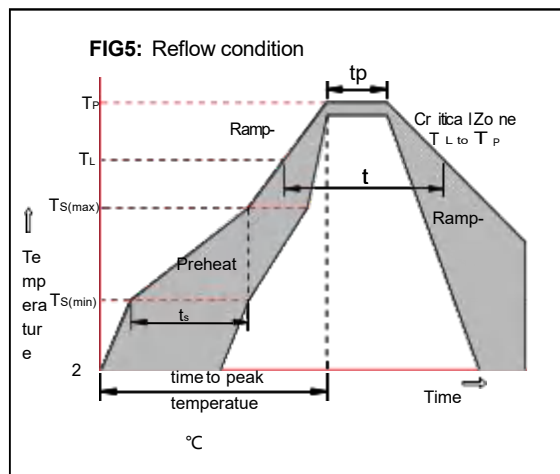


Package Dimensions & Suggested Pad Layout

SOD123


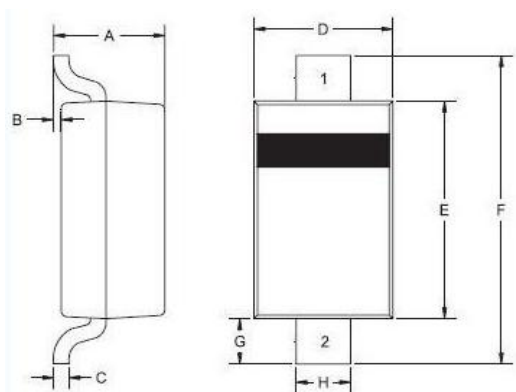


SOD123		
Dim	Min	Max
A	0.95	1.35
B	0.00	0.12
C	-	0.20
D	1.40	1.80
E	2.50	2.80
F	3.60	3.90
G	0.40	-
H	0.50	0.70
All Dimensions in mm		



Dimensions	Value (in mm)
G	2.20
X	1.20
X1	4.60
Y	1.20

Tape & rell specification

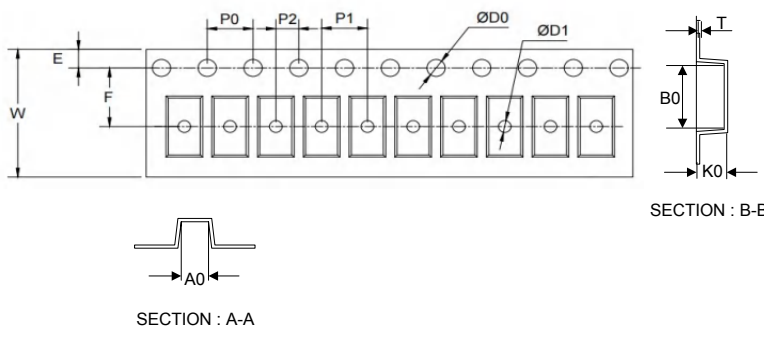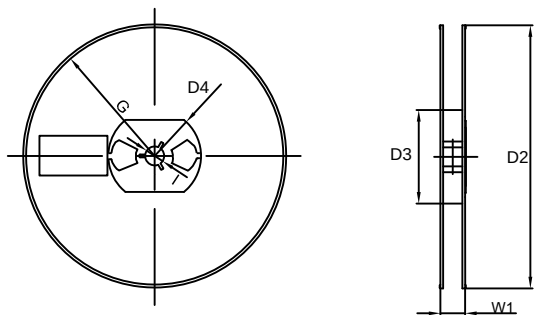Tape		Symbol	Dimension (mm)
 SECTION : A-A SECTION : B-B		P0	4.00±0.20
		P1	4.00±0.20
		P2	2.00±0.20
		D0	1.55±0.10
		D1	1.00±0.20
		E	1.75±0.20
		F	3.60±0.20
		W	8.00±0.40
		A0	2.30±0.40
		B0	4.00±0.40
		K0	1.50±0.40
		T	0.23±0.10
		D2	177.0±3.0
		D3	55Min.
		D4	R24.0±3.0
7" Reel		G	R82.0±3.0
		I	13.0±2.0
		W1	11.0±3.0
		Quantity: 3000PCS	