



Surface Mount Superfast Recovery Rectifier

Reverse Voltage – 50 to 600 V

Forward Current – 1 A

FEATURES


- Easy pick and place
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Superfast recovery times for high efficiency

MECHANICAL DATA

- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.00053oz

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

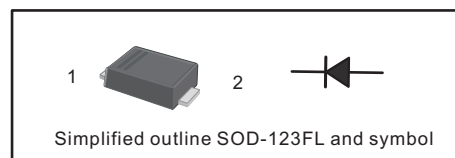

Absolute Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.


Parameter	Symbols	ES1AFL	ES1BFL	ES1CFL	ES1DFL	ES1EFL	ES1GFL	ES1JFL	Units
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	600	V
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	600	V
Maximum Average Forward Rectified Current at T _c = 125 °C	I _{F(AV)}	1							A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I _{FSM}	30							A
Maximum Forward Voltage at 1 A	V _F	1				1.25		1.70	V
Maximum DC Reverse Current at Rated DC Blocking Voltage T _a = 25 °C T _a =125 °C	I _R	5 100							μA
Typical Junction Capacitance at V _R =4V, f=1MHz	C _j	15							pF
Maximum Reverse Recovery Time ⁽¹⁾	t _{rr}	35							ns
Typical Thermal Resistance ⁽²⁾	R _{θJA}	85							°C/W
Operating and Storage Temperature Range	T _j , T _{stg}	-55 ~ +150							°C

(1) Measured with $I_F = 0.5\text{ A}$, $I_R = 1\text{ A}$, $I_T = 0.25\text{ A}$.

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.



Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram

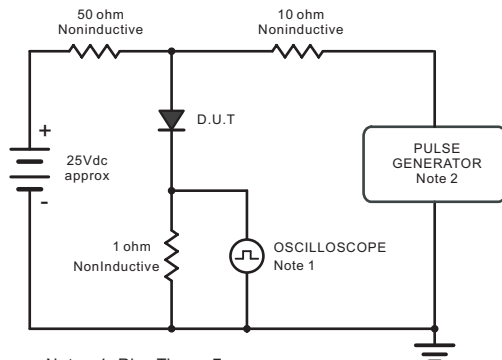

Note: 1. Rise Time = 7ns, max.
Input Impedance = 1megohm, 22pF.
2. Rise Time = 10ns, max.
Source Impedance = 50 ohms.

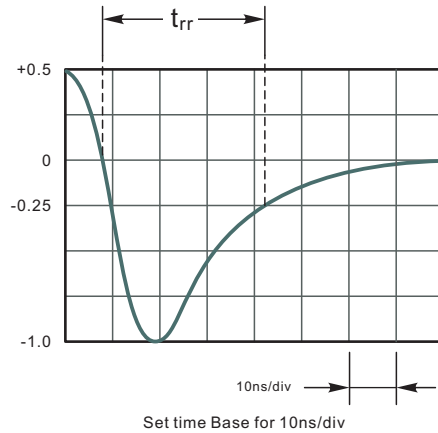


Fig.2 Maximum Average Forward Current Rating

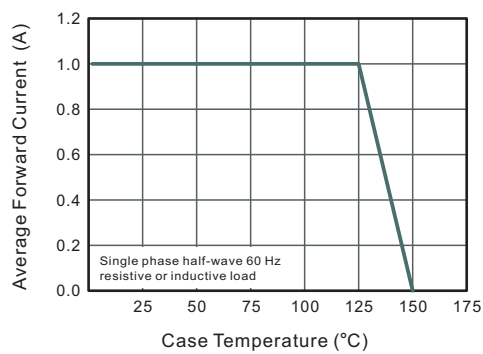


Fig.3 Typical Reverse Characteristics

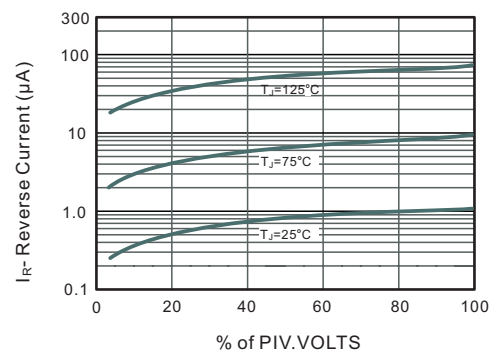


Fig.4 Typical Forward Characteristics

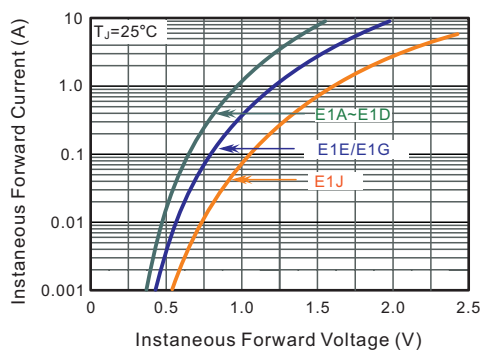


Fig.5 Typical Junction Capacitance


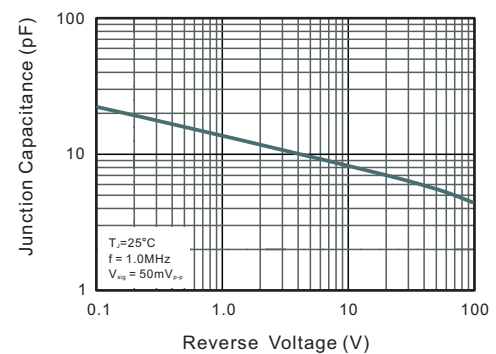


Fig.6 Maximum Non-Repetitive Peak Forward Surge Current




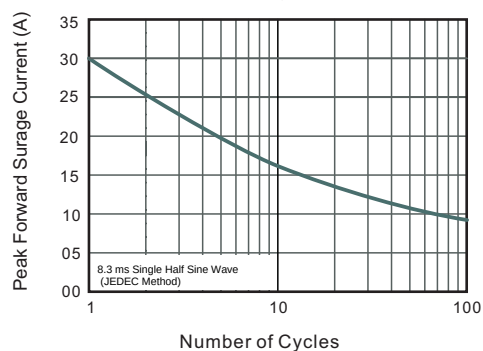

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-123FL

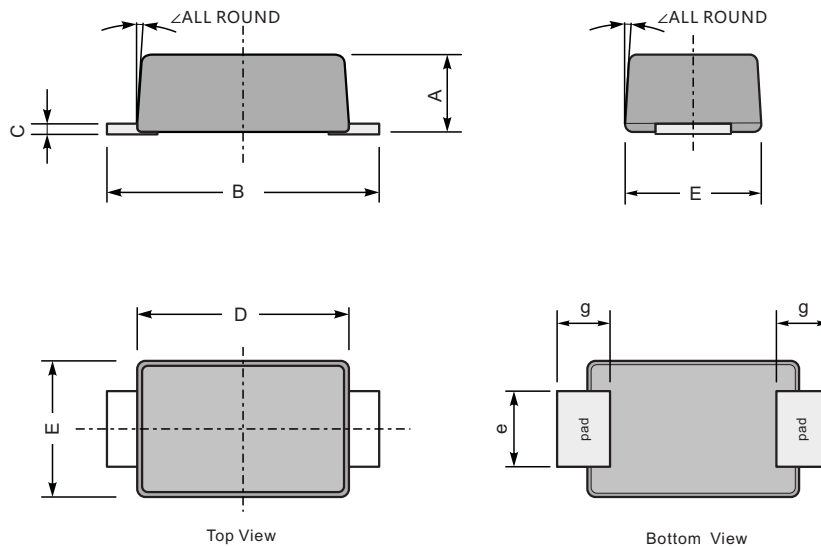

UNIT		A	C	D	E	e	g	B	$\angle$
mm	max	1.15	0.20	2.8	2.0	1.2	0.9	3.8	5°
	min	0.95	0.12	2.5	1.7	0.9	0.7	3.5	
mil	max	45	7.9	110	78.7	47	35	150	
	min	37	4.7	98	67	35	28	138	

The recommended mounting pad size

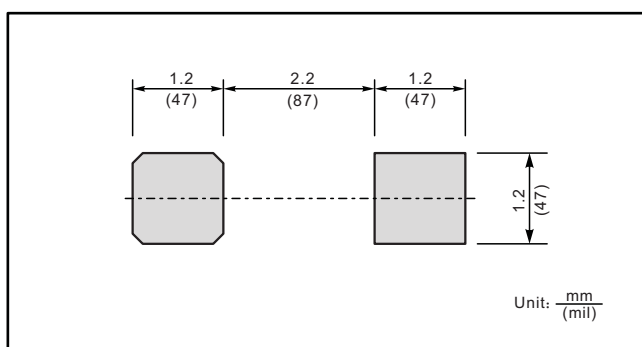

Marking

Type number	Marking code
ES1AFL	E1A
ES1BFL	E1B
ES1CFL	E1C
ES1DFL	E1D
ES1EFL	E1E
ES1GFL	E1G
ES1JFL	E1J