

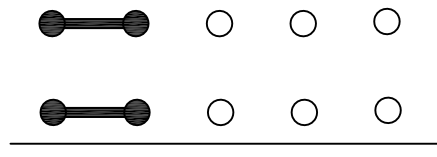
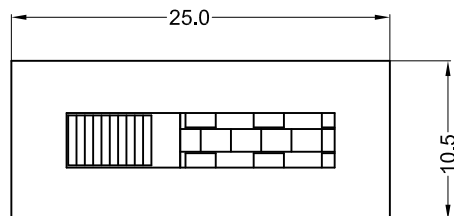


## CUSTOMER DRAWING

| REV.<br>版本 | ECN NO.<br>ECN编号 | DATE<br>日期 | DESCRIPTION<br>内容描述 | APPROVED BY<br>核准 |
|------------|------------------|------------|---------------------|-------------------|
| A0         | ——               | 2026/09/02 | NEW RELEASE         | APLIN             |
|            |                  |            |                     |                   |

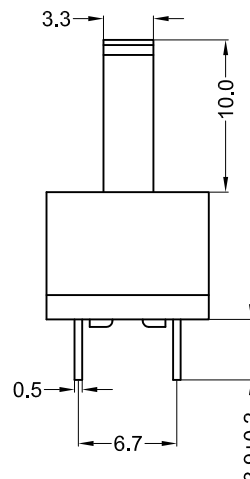

CIRCUIT

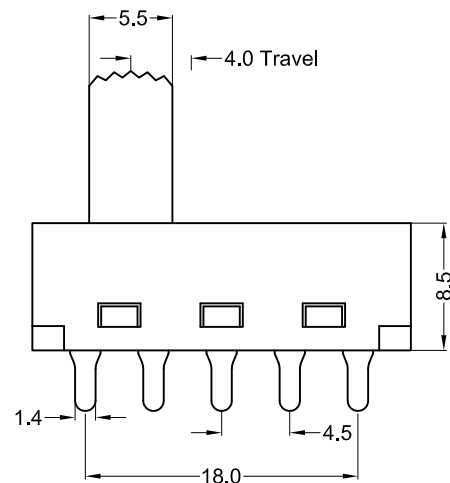

## MARKING

HAOTONG  
H25 SERIES  
3(3)A 125/250VAC

| IE5    | 03                                    | XX       |                                                                                     | X             |                 | X             | X                                                                                   | X               | X            | X                                                                                   | X       | X                                                                                   | XX                                                                                  |                                                                                     |         |  |  |
|--------|---------------------------------------|----------|-------------------------------------------------------------------------------------|---------------|-----------------|---------------|-------------------------------------------------------------------------------------|-----------------|--------------|-------------------------------------------------------------------------------------|---------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|--|--|
| Series | Rating                                | Function |                                                                                     | Terminal Type |                 | Actuator Type |                                                                                     | Actuator Height | Housing Type | Terminal Type                                                                       | Package | Actuator Color                                                                      | Housing Color                                                                       | Suff                                                                                |         |  |  |
| 03     | 10k 120V<br>6A 250V<br>1000A 120/250V | 12       |  | S             | Solder Terminal | A             |  | 3 3mm           | N            |  | T1      |  | Z SMD                                                                               | B Black                                                                             | B Black |  |  |
|        |                                       | 13       |  | P             | PCB Terminal    |               |                                                                                     | 4 4mm           |              |                                                                                     |         |                                                                                     | Blank DIP                                                                           | W White                                                                             | W White |  |  |
|        |                                       | 14       |  |               |                 | B             |  | 5 5mm           | R            |  | T2      |  |                                                                                     | R Red                                                                               | R Red   |  |  |
|        |                                       | ...      | .....                                                                               |               |                 |               |                                                                                     | ...             | ...          |                                                                                     |         |                                                                                     |                                                                                     |                                                                                     |         |  |  |
|        |                                       | 22       |  |               |                 | C             |  |                 |              |                                                                                     |         | T3                                                                                  |  |                                                                                     |         |  |  |
|        |                                       | 23       |  |               |                 |               |                                                                                     |                 |              |                                                                                     |         |                                                                                     | T4                                                                                  |  |         |  |  |
|        |                                       | 24       |  |               |                 |               |                                                                                     |                 |              |                                                                                     |         |                                                                                     | T5                                                                                  |  |         |  |  |
|        |                                       | ...      | .....                                                                               |               |                 |               |                                                                                     |                 |              |                                                                                     |         |                                                                                     |                                                                                     |                                                                                     |         |  |  |
|        |                                       |          |                                                                                     |               |                 |               |                                                                                     |                 |              |                                                                                     |         |                                                                                     |                                                                                     |                                                                                     |         |  |  |
|        |                                       |          |                                                                                     |               |                 |               |                                                                                     |                 |              |                                                                                     |         |                                                                                     |                                                                                     |                                                                                     |         |  |  |

### 规格 Specification:

- 1.开关型号 Model No.:H25-0324PC
- 2.额定值 Rating:3(3)A 125/250VAC
- 3.接触电阻 Contact resistance: $\leq 30\text{ m}\Omega$
- 4.绝缘电阻 Insulation resistance: $\geq 100\text{ M}\Omega(\text{DC}500\text{V}/\text{Min})$
- 5.电气寿命 Electronics life: $> 10000\text{ cycles}$
- 6.操作力 Operation force: $500\pm 150\text{gf}$
- 7.所有材料符合Rohs要求 All materials are Rohs compliant

**HAOSWITH**

佛山市皓通电子有限公司  
FoShan Haoswitch Electronic Co.,Ltd.

|                    |                                |                    |                                                                                       |      |                      |    |                       |                  |
|--------------------|--------------------------------|--------------------|---------------------------------------------------------------------------------------|------|----------------------|----|-----------------------|------------------|
| DRAWN BY<br>制 图    | YUAN                           | 2026/09/02         | SCALE<br>比 例                                                                          | FREE | PRODUCT NAME<br>产品名称 |    | SLIDE SWITCH          |                  |
| CHECKED BY<br>核 对  | APLIN                          | 2026/09/02         | PAGE<br>页 面                                                                           | 1/1  | DESCRIPTION<br>产品描述  |    | 3(3)A 125/250VAC      |                  |
| APPROVED BY<br>批 准 | ZHANG                          | 2026/09/02         | UNIT<br>单 位                                                                           | mm   |                      |    |                       |                  |
| TOLERANCE<br>未标注公差 | X: ±0.5<br>X: ±0.3<br>XX: ±0.2 | X°: ±5°<br>X°: ±2° | PROJECTED 投影                                                                          |      | PART NO.<br>物料编号     |    | H25-0324PC-10NT11WW-T |                  |
|                    |                                |                    |  |      | SIZE<br>尺寸           | A4 | DRAWN NO.<br>图纸编号     | HTDW20260902-005 |