



承 认 书

DATA SHEET

Customer name: _____

BERYL SERIES: BC

TYPE: RADIAL

DESCRIPTION : PBC016M471E110C61B

Apply date : 2021-11-02

BERYL			CUSTOMER		
P/N:PBC016M471E110C61B			P/N:		
PREPARED	CHECKED	APPROVAL	PREPARED	CHECKED	APPROVAL
郭颖思	何东石	伍小军			

Zhao Qing Beryl Electronic Technology Co., Ltd.

TEL: (0758) 2862871 FAX: (0758) 2862870

E-mail: master@zq-beryl.com <http://www.zq-beryl.com>

NO.8 DUANZHOU ROAD, ZHAOQING CITY. GUANGDONG. CHINA

After the product certification, please sign a copy, if you do not sign the acknowledgment before the formal order, it is considered that the user has defaulted our relevant standards and technical indicators.

[illegible]



CONDUCTIVE POLYMER ALUMINUM ELECTROLYTIC CAPACITORS

1、Application

This specification applies to Aluminum electrolytic capacitor (foil type) used in electronic equipment.
Designed capacitor's quality meets IEC 60384.

2、Table of specification and characteristics

Series	Cap(uF) 120Hz/20℃	WV(V)	Size	Temperature (℃)	Life(hours)
BC	470	16	6.3*11	-55-105℃	2000
DF (%) (MAX) 120Hz/20℃	LC(μA) (MAX) 2min/20℃	ESR(mΩ) (MAX) 100KHz/20℃	RC (mArms) (MAX)100KHz	Surge voltage(V)	
12	1504	16	3300	18.4	


Other :

Frequency Multipliers:

频率 Frequency(Hz)	60Hz	120HZ≤f < 1KHZ	1KHZ≤f < 10KHZ	10KHZ≤f < 100KHZ	100KHZ≤f < 500KHZ
系数 Coefficient	0.04	0.05	0.30	0.70	1.00

3、Product Dimensions

Standard Type

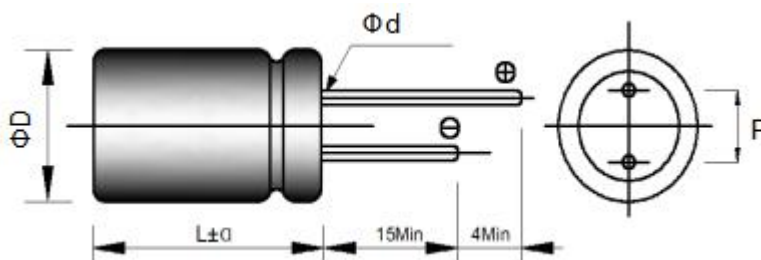

ΦD	L	α	Φd	P
6.3±0.5	11	1.0	0.5±0.05	2.5±0.5



CONDUCTIVE POLYMER ALUMINUM ELECTROLYTIC CAPACITORS

4、Part Number

P	BC	016	M	471	E110	C6	1	B
---	----	-----	---	-----	------	----	---	---

→ Printing color

→ No special requirements

→ TYPE CODE DESCRIPTION

diameter: $E=\Phi 6.3$

length: 110=11mm

→ RATED CAPACITANCE:471=470uF


→ CAPACITANCE TOLERANCE:M= $\pm 20\%$

→ RATED VOLTAGE: 016=16V

→ SERIES NAME

→ Polymer Aluminum Solid Capacitors

5、Construction

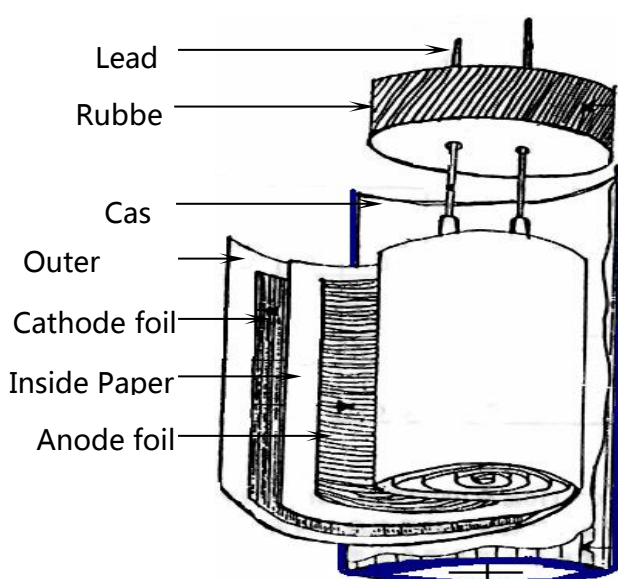


Material name	Composition	Supplier name
Lead	Al and (Fe+Cu+Sn)	Nan Ming、Zhong Yong、Jin Lian fu
Rubber	EPT / IIR	Lian An 、Lian Hua Xin、Yi Feng
Case	Aluminum+Coating	Yi Peng、Ao Xing、Yuan Kang
Paper	Wood / Fibrous plant materials	KAN、NKK
Anode foil	Al + Al ₂ O ₃	KDK、Heng Yang、JCC、Li DUN
Cathode foil	Aluminum	JDong Yang、JCC、TOYO、Na Nuo
Dielectrics	Poly3,4-Ethylene Dioxy Thiophene	BERYL、Xin Zhou Bang、Bei Li、Hua Hong、Si Nuo Fu Hong



CONDUCTIVE POLYMER ALUMINUM ELECTROLYTIC CAPACITORS

6、Product Marking

Marking Sample :

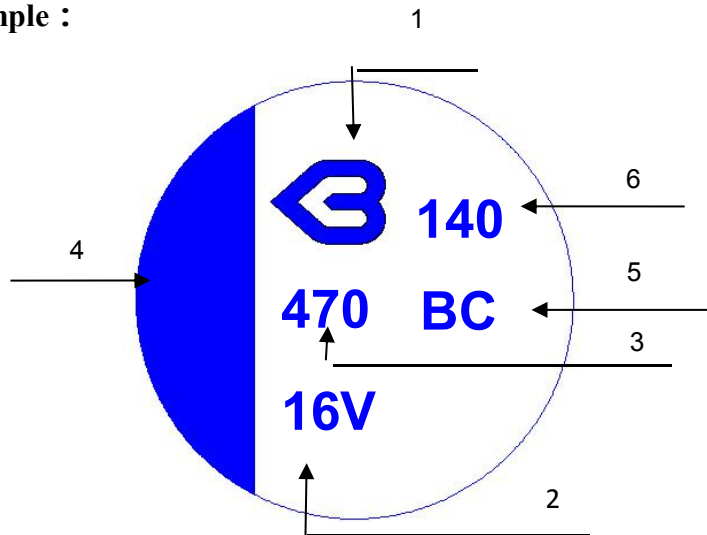

Marking Details :

Capacitor shall be marked the following items:

- 1) Trademark (BERYL)
- 2) working voltage
- 3) Nominal capacitance
- 4) Cathode marked
- 5) Series
- 6) Date code

1 : Manufactured year 2021

Code	9	0	1	2	3	4	5	6	
Year	2019	2020	2021	2022	2023	2024	2025	2026	

16 : Manufactured week (01、02、03、04.....51、52)



CONDUCTIVE POLYMER ALUMINUM ELECTROLYTIC CAPACITORS

7、Characteristics

Standard atmospheric conditions

Unless other specified, the standard range of atmospheric conditions for making measurements and tests is as follows :

Ambient temperature : 15°C to 35°C

Relative humidity : 45% to 85%

Air pressure : 86kPa to 106kPa

If there is any doubt about the results, measurement shall be made within the following conditions:

Ambient temperature : 20°C ± 2°C


Relative humidity : 60% to 70%

Air pressure : 86kPa to 106kPa

Operating temperature range

The ambient temperature range at which the capacitor can be operated continuously at rated voltage is -55°C to +105°C.

Table

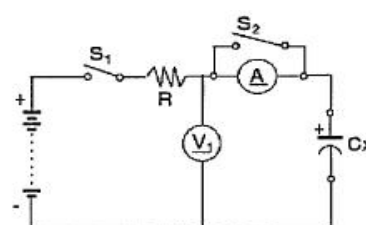ITEM		PERFORMANCE
1	Nominal capacitance (Tolerance)	<Condition> Measuring Frequency: 120Hz±12Hz Measuring Voltage: Not more than 0.5Vrms +1.5~2.0V.DC Measuring Temperature: 20±2°C <Criteria> Shall be within the specified capacitance tolerance.
2	Leakage current	<Condition> Connecting the capacitor with a protective resistor (1kΩ±10Ω) in series for 2 minutes, and then, measure leakage current. <Criteria> I: Leakage current (μA) $I (\mu A) \leq 0.2CV$ or 500 (μA) whichever is greater, measurement circuit refer to right drawing. C: Capacitance (μF) V: Rated DC working voltage (V) 
3	Dissipation factor	<Condition> Nominal capacitance, for measuring frequency, voltage and temperature. <Criteria> Must be within the parameters (See page 3)



CONDUCTIVE POLYMER ALUMINUM ELECTROLYTIC CAPACITORS

ITEM		PERFORMANCE																	
4	Equivalent Series Resistance	<Condition> Measuring frequency:100kHz; Measuring temperature:20±2℃ Measuring point: 2mm max. from the surface of a sealing rubber on the lead wire. <Criteria> (20℃) Must be within the parameters (See page 3)																	
5	Load life test	<Condition> According to IEC60384-4No. 4.13 methods, the capacitor is stored at a temperature of Maximum operating temperature ±2℃ with DC bias voltage for Rated life +48/0hours. Then the product should be tested after 16 hours recovering time at atmospheric conditions. The result should meet the following table: <Criteria> The characteristic shall meet the following requirements. <table><tr><td>Leakage current</td><td colspan="2">Not more than the specified value.</td></tr><tr><td>Capacitance Change</td><td colspan="2">Within ±20% of initial value.</td></tr><tr><td>Dissipation Factor</td><td colspan="2">Not more than 150%of the specified value.</td></tr><tr><td>Equivalent Series Resistance</td><td colspan="2">Not more than 150%of the specified value.</td></tr><tr><td>Appearance</td><td colspan="2">There shall be no leakage of electrolyte.</td></tr></table>			Leakage current	Not more than the specified value.		Capacitance Change	Within ±20% of initial value.		Dissipation Factor	Not more than 150%of the specified value.		Equivalent Series Resistance	Not more than 150%of the specified value.		Appearance	There shall be no leakage of electrolyte.	
Leakage current	Not more than the specified value.																		
Capacitance Change	Within ±20% of initial value.																		
Dissipation Factor	Not more than 150%of the specified value.																		
Equivalent Series Resistance	Not more than 150%of the specified value.																		
Appearance	There shall be no leakage of electrolyte.																		
6	Shelf life test	<Condition> The capacitors are then stored with no voltage applied at a temperature of Maximum operating temperature±2℃ for1000+48/0 hours. Following this period, the capacitors shall be removed from the test chamber and be allowed to stabilized at room temperature for16 hours. measure leakage current <Criteria> The characteristic shall meet the following requirements. <table><tr><td>Leakage current</td><td colspan="2">Not more than the specified value</td></tr><tr><td>Capacitance Change</td><td colspan="2">Within ±20% of initial value.</td></tr><tr><td>Dissipation Factor</td><td colspan="2">Not more than 150%of the specified value.</td></tr><tr><td>Equivalent Series Resistance</td><td colspan="2">Not more than 150%of the specified value.</td></tr><tr><td>Appearance</td><td colspan="2">There shall be no leakage of electrolyte.</td></tr></table>			Leakage current	Not more than the specified value		Capacitance Change	Within ±20% of initial value.		Dissipation Factor	Not more than 150%of the specified value.		Equivalent Series Resistance	Not more than 150%of the specified value.		Appearance	There shall be no leakage of electrolyte.	
Leakage current	Not more than the specified value																		
Capacitance Change	Within ±20% of initial value.																		
Dissipation Factor	Not more than 150%of the specified value.																		
Equivalent Series Resistance	Not more than 150%of the specified value.																		
Appearance	There shall be no leakage of electrolyte.																		
7	Terminal strength	<Condition> Tensile strength of terminals Fixed the capacitor, applied force to the terminal in lead out direction for30+5-0 seconds. Bending strength of terminals. Fixed the capacitor, applied force to bent the terminal (1~4 mm from the rubber) for 90° within 2~3 seconds, and then bent it for 90° to its original position within 2~3 seconds. <table><tr><td>Diameter of lead wire</td><td>Tensile force N (kgf)</td><td>Bending force N (kgf)</td></tr><tr><td>0.5mm and less</td><td>5 (0.51)</td><td>2.5 (0.25)</td></tr><tr><td>0.6~0.8 mm</td><td>10 (1.02)</td><td>5 (0.51)</td></tr></table> <Criteria> No noticeable changes shall be found, no breakage or looseness at the terminal.			Diameter of lead wire	Tensile force N (kgf)	Bending force N (kgf)	0.5mm and less	5 (0.51)	2.5 (0.25)	0.6~0.8 mm	10 (1.02)	5 (0.51)						
Diameter of lead wire	Tensile force N (kgf)	Bending force N (kgf)																	
0.5mm and less	5 (0.51)	2.5 (0.25)																	
0.6~0.8 mm	10 (1.02)	5 (0.51)																	



CONDUCTIVE POLYMER ALUMINUM ELECTROLYTIC CAPACITORS

ITEM		PERFORMANCE																							
8	Temperature characteristics	<Condition> <table><tr><th>STEP</th><th>Testing temperature (°C)</th><th>Time</th></tr><tr><td>1</td><td>20±2</td><td>Time to reach thermal equilibrium</td></tr><tr><td>2</td><td>(-55)-25±3</td><td>Time to reach thermal equilibrium</td></tr><tr><td>3</td><td>20±2</td><td>Time to reach thermal equilibrium</td></tr><tr><td>4</td><td>105±2</td><td>Time to reach thermal equilibrium</td></tr><tr><td>5</td><td>20±2</td><td>Time to reach thermal equilibrium</td></tr></table> Capacitance, DF, and impedance shall be measured at 120Hz. <Criteria> a. At +105°C, capacitance measured at +20°C shall be within ±25% of its original value. Dissipation factor shall be within the specified value The leakage current measured shall be within the specified value. b. In step 5, capacitance measured at +20°C shall be within ±10% of its original value. Dissipation factor shall be within the specified value The leakage current measured shall be within the specified value. c. At- 55°C/ (20°C), Impedance (Z) ratio shall not exceed the value of the following table. <table><tr><td>Z-25°C/Z+20°C</td><td>≦ 1.25</td><td rowspan="2">(100KHz)</td></tr><tr><td>Z-55°C/Z+20°C</td><td>≦ 1.25</td></tr></table>	STEP	Testing temperature (°C)	Time	1	20±2	Time to reach thermal equilibrium	2	(-55)-25±3	Time to reach thermal equilibrium	3	20±2	Time to reach thermal equilibrium	4	105±2	Time to reach thermal equilibrium	5	20±2	Time to reach thermal equilibrium	Z-25°C/Z+20°C	≦ 1.25	(100KHz)	Z-55°C/Z+20°C	≦ 1.25
		STEP	Testing temperature (°C)	Time																					
		1	20±2	Time to reach thermal equilibrium																					
		2	(-55)-25±3	Time to reach thermal equilibrium																					
		3	20±2	Time to reach thermal equilibrium																					
		4	105±2	Time to reach thermal equilibrium																					
		5	20±2	Time to reach thermal equilibrium																					
		Z-25°C/Z+20°C	≦ 1.25	(100KHz)																					
		Z-55°C/Z+20°C	≦ 1.25																						
		9	Surge test	<Condition> Applied a surge voltage to the capacitor connected with a (100 ±50)/CR (kΩ) resistor in series for 30±5 seconds in every 5±0.5 minutes at 15~35°C.Procedure shall be repeated 1000 times. Then the capacitors shall be left under normal humidity for 1-2 hours before measurement CR : Nominal Capacitance (μF) <Criteria> <table><tr><td>Leakage current</td><td>Not more than the specified value.</td></tr><tr><td>Capacitance Change</td><td>Within ±15% of initial value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than the specified value.</td></tr><tr><td>Appearance</td><td>There shall be no leakage of electrolyte.</td></tr></table> Attention : This test simulates over voltage at abnormal situation only. It is not applicable to such over voltage as often applied.	Leakage current	Not more than the specified value.	Capacitance Change	Within ±15% of initial value.	Dissipation Factor	Not more than the specified value.	Appearance	There shall be no leakage of electrolyte.													
Leakage current	Not more than the specified value.																								
Capacitance Change	Within ±15% of initial value.																								
Dissipation Factor	Not more than the specified value.																								
Appearance	There shall be no leakage of electrolyte.																								




CONDUCTIVE POLYMER ALUMINUM ELECTROLYTIC CAPACITORS

ITEM		PERFORMANCE																
10	Change of temperature test	<Condition> Temperature cycle: According to IEC60384-4 No.4.7 methods, capacitor shall be placed in an oven, the condition according as below: <table><tr><th>Temperature</th><th>Time</th></tr><tr><td>(1) +20℃</td><td>3 Minutes</td></tr><tr><td>(2) Rated low temperature (- 55℃) (-25℃)</td><td>30±2 Minutes</td></tr><tr><td>(3) Rated high temperature (+105℃)</td><td>30±2 Minutes</td></tr><tr><td colspan="2">(1) to (3) =1 cycle, total 5 cycle</td></tr></table> <Criteria> The characteristic shall meet the following requirement. <table><tr><td>Leakage current</td><td>Not more than the specified value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than the specified value.</td></tr><tr><td>Appearance</td><td>There shall be no leakage of electrolyte.</td></tr></table>	Temperature	Time	(1) +20℃	3 Minutes	(2) Rated low temperature (- 55℃) (-25℃)	30±2 Minutes	(3) Rated high temperature (+105℃)	30±2 Minutes	(1) to (3) =1 cycle, total 5 cycle		Leakage current	Not more than the specified value.	Dissipation Factor	Not more than the specified value.	Appearance	There shall be no leakage of electrolyte.
Temperature	Time																	
(1) +20℃	3 Minutes																	
(2) Rated low temperature (- 55℃) (-25℃)	30±2 Minutes																	
(3) Rated high temperature (+105℃)	30±2 Minutes																	
(1) to (3) =1 cycle, total 5 cycle																		
Leakage current	Not more than the specified value.																	
Dissipation Factor	Not more than the specified value.																	
Appearance	There shall be no leakage of electrolyte.																	
11	Damp heat test	<Condition> Humidity test: According to IEC60384-4 No.4.12 methods, capacitor shall be exposed for 500±8 hours in an atmosphere of 90~95%R H .at 40±2℃, the characteristic change shall meet the following requirement. <Criteria> <table><tr><td>Leakage current</td><td>Not more than the specified value.</td></tr><tr><td>Capacitance Change</td><td>Within ±10% of initial value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than 150% of the specified value.</td></tr><tr><td>Appearance</td><td>There shall be no leakage of electrolyte.</td></tr></table>	Leakage current	Not more than the specified value.	Capacitance Change	Within ±10% of initial value.	Dissipation Factor	Not more than 150% of the specified value.	Appearance	There shall be no leakage of electrolyte.								
Leakage current	Not more than the specified value.																	
Capacitance Change	Within ±10% of initial value.																	
Dissipation Factor	Not more than 150% of the specified value.																	
Appearance	There shall be no leakage of electrolyte.																	
12	Solderability test	<Condition> The capacitor shall be tested under the following conditions: Soldering temperature : 245 ±5℃ Dipping depth : 2mm Dipping speed : 25±2.5mm/s Dipping time : 3±0.5s <Criteria> <table><tr><td>Soldering wetting time</td><td>Less than 3s</td></tr><tr><td>Coating quality</td><td>A minimum of 95% of the surface being immersed</td></tr></table>	Soldering wetting time	Less than 3s	Coating quality	A minimum of 95% of the surface being immersed												
Soldering wetting time	Less than 3s																	
Coating quality	A minimum of 95% of the surface being immersed																	



CONDUCTIVE POLYMER ALUMINUM ELECTROLYTIC CAPACITORS

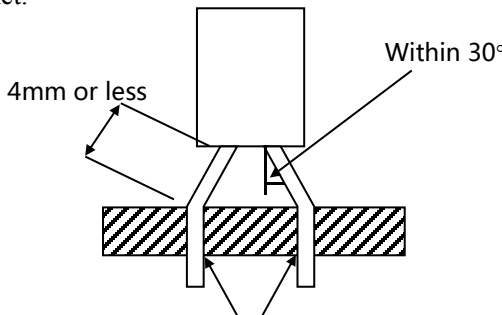ITEM		PERFORMANCE								
13	Vibration test	<Condition> The following conditions shall be applied for 2 hours in each 3 mutually perpendicular directions. Vibration frequency range : 10Hz ~ 55Hz each to peak amplitude : 1.5mm Sweep rate : 10Hz ~ 55Hz ~ 10Hz in about 1 minute Mounting method : The capacitor with diameter greater than 12.5mm or longer than 25mm must be fixed in place with a bracket.  <Criteria> After the test, the following items shall be tested: <table><tr><td>Inner construction</td><td>No intermittent contacts, open or short circuiting. No damage of tab terminals or electrodes.</td></tr><tr><td>Appearance</td><td>No mechanical damage in terminal. No leakage of electrolyte or swelling of the case. The markings shall be legible.</td></tr></table>	Inner construction	No intermittent contacts, open or short circuiting. No damage of tab terminals or electrodes.	Appearance	No mechanical damage in terminal. No leakage of electrolyte or swelling of the case. The markings shall be legible.				
		Inner construction	No intermittent contacts, open or short circuiting. No damage of tab terminals or electrodes.							
Appearance	No mechanical damage in terminal. No leakage of electrolyte or swelling of the case. The markings shall be legible.									
14	Resistance to solder heat test	<Condition> Terminals of the capacitor shall be immersed into solder bath at 260±5℃ for10±1seconds or400±10℃ for3⁻⁰ seconds to 1.5~2.0 mm from the body of capacitor. Then the capacitor shall be left under the normal temperature and normal humidity for 1~2 hours before measurement. <Criteria> <table><tr><td>Leakage current</td><td>Not more than the specified value.</td></tr><tr><td>Capacitance Change</td><td>Within ±5% of initial value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than the specified value.</td></tr><tr><td>Appearance</td><td>There shall be no leakage of electrolyte.</td></tr></table>	Leakage current	Not more than the specified value.	Capacitance Change	Within ±5% of initial value.	Dissipation Factor	Not more than the specified value.	Appearance	There shall be no leakage of electrolyte.
		Leakage current	Not more than the specified value.							
Capacitance Change	Within ±5% of initial value.									
Dissipation Factor	Not more than the specified value.									
Appearance	There shall be no leakage of electrolyte.									



CONDUCTIVE POLYMER ALUMINUM ELECTROLYTIC CAPACITORS

8、 Packing Information


Packing Label Marked (the following items shall be marked on the label)

(Inside box or bag)


(1) Clint order number (2) Client part number (3) Beryl part number (4) Capacitance (5) Voltage (6) Dimension
(7) Packaging quantity (8) Capacitance tolerance (9) QC Marking (10) Lot number (11) Series

LOT Number :


12 34 56 7 8 9 10

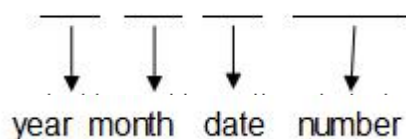

1) Bulk Packing:

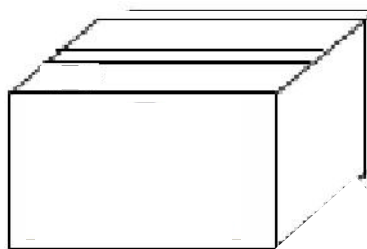

2) Taped Packing:

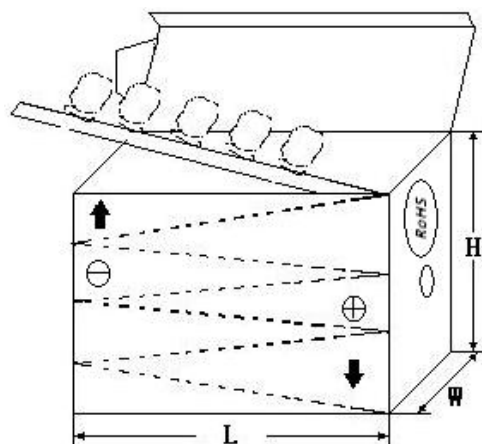

3) Outer box



外箱

4) Outer box label:

BERYL Zhao Qing Beryl Electronic Technology Co., Ltd.					
C.S.R:		RoHS HF			
C.S.R P/O:					
C.S.R P/N:					
S.P.R P/N:		QC			
SPEC:					
QTY:	PCS			TOL:	%
L/N:				S.P.R:	



CONDUCTIVE POLYMER ALUMINUM ELECTROLYTIC CAPACITORS

9、Prohibition to Use Environment- related Substances

We are hereby to certify the followings:

Our company hereby warrants and guarantees that all or part of products, including, but not limited to, the peripherals, accessories or package, delivered to your company (including your subsidiaries and affiliated companies) directly or indirectly by our company are free from any of the substances listed below.

The latest version of <Substances Prohibited as per ROHS or <Sony-SS-00259>

Accord with heavy metal	Cadmium and cadmium compounds
	Lead and lead compounds
	Mercury and mercury compounds
	Hexavalent chromium compounds
Organic chlorin compounds	Polychlorinated biphenyls (PCB)
	Polychlorinated naphthalenes (PCN)
	Polychlorinated terphenyls (PCT)
	Chlorinated paraffins (CP)
	Other chlorinated organic compounds
Organic bromine compounds	Polybrominated biphenyls (PBB)
	Polybrominated diphenylethers (PBDE)
	Other brominated organic compounds
Tributyltin compounds	
Triphenyltin compounds	
Asbestos	
Specific azo compounds	
Formaldehyde	
Polyvinyl chloride (PVC) and PVC blends	
F、Cl、Br、I	
REACH	



CONDUCTIVE POLYMER ALUMINUM ELECTROLYTIC CAPACITORS

Test Report

Series	BC	Spec.	470uF/16V	Size(mm)	6.3*11
Cap tolerance	±20%	Work temperature	105°C	Color of Tube	Blue lettering
Test date	2021-11-01	Test humidity	69%	Test temperature	24.3°C

Items	Cap (μ F)	D.F (%)	ESR (m Ω)	L.C (μ A)	Appearance
SPEC NO.	376~564 (120Hz)	≤ 12 (120Hz)	≤ 16 (100KHz)	≤ 1504 (2min)	
1	458.28	2.60	6.69	36.0	OK
2	459.16	2.35	6.01	27.0	OK
3	462.40	2.56	6.28	32.0	OK
4	475.67	2.46	6.50	21.0	OK
5	451.80	3.11	6.12	35.0	OK
6	466.95	2.53	5.25	27.0	OK
7	460.93	2.63	6.67	29.0	OK
8	460.74	2.44	5.65	19.0	OK
9	457.42	2.39	5.49	22.0	OK
10	463.77	2.52	6.49	14.0	OK
Opinion					
Approve : 伍小军		Audit : 何东石		Test : 唐积君	