


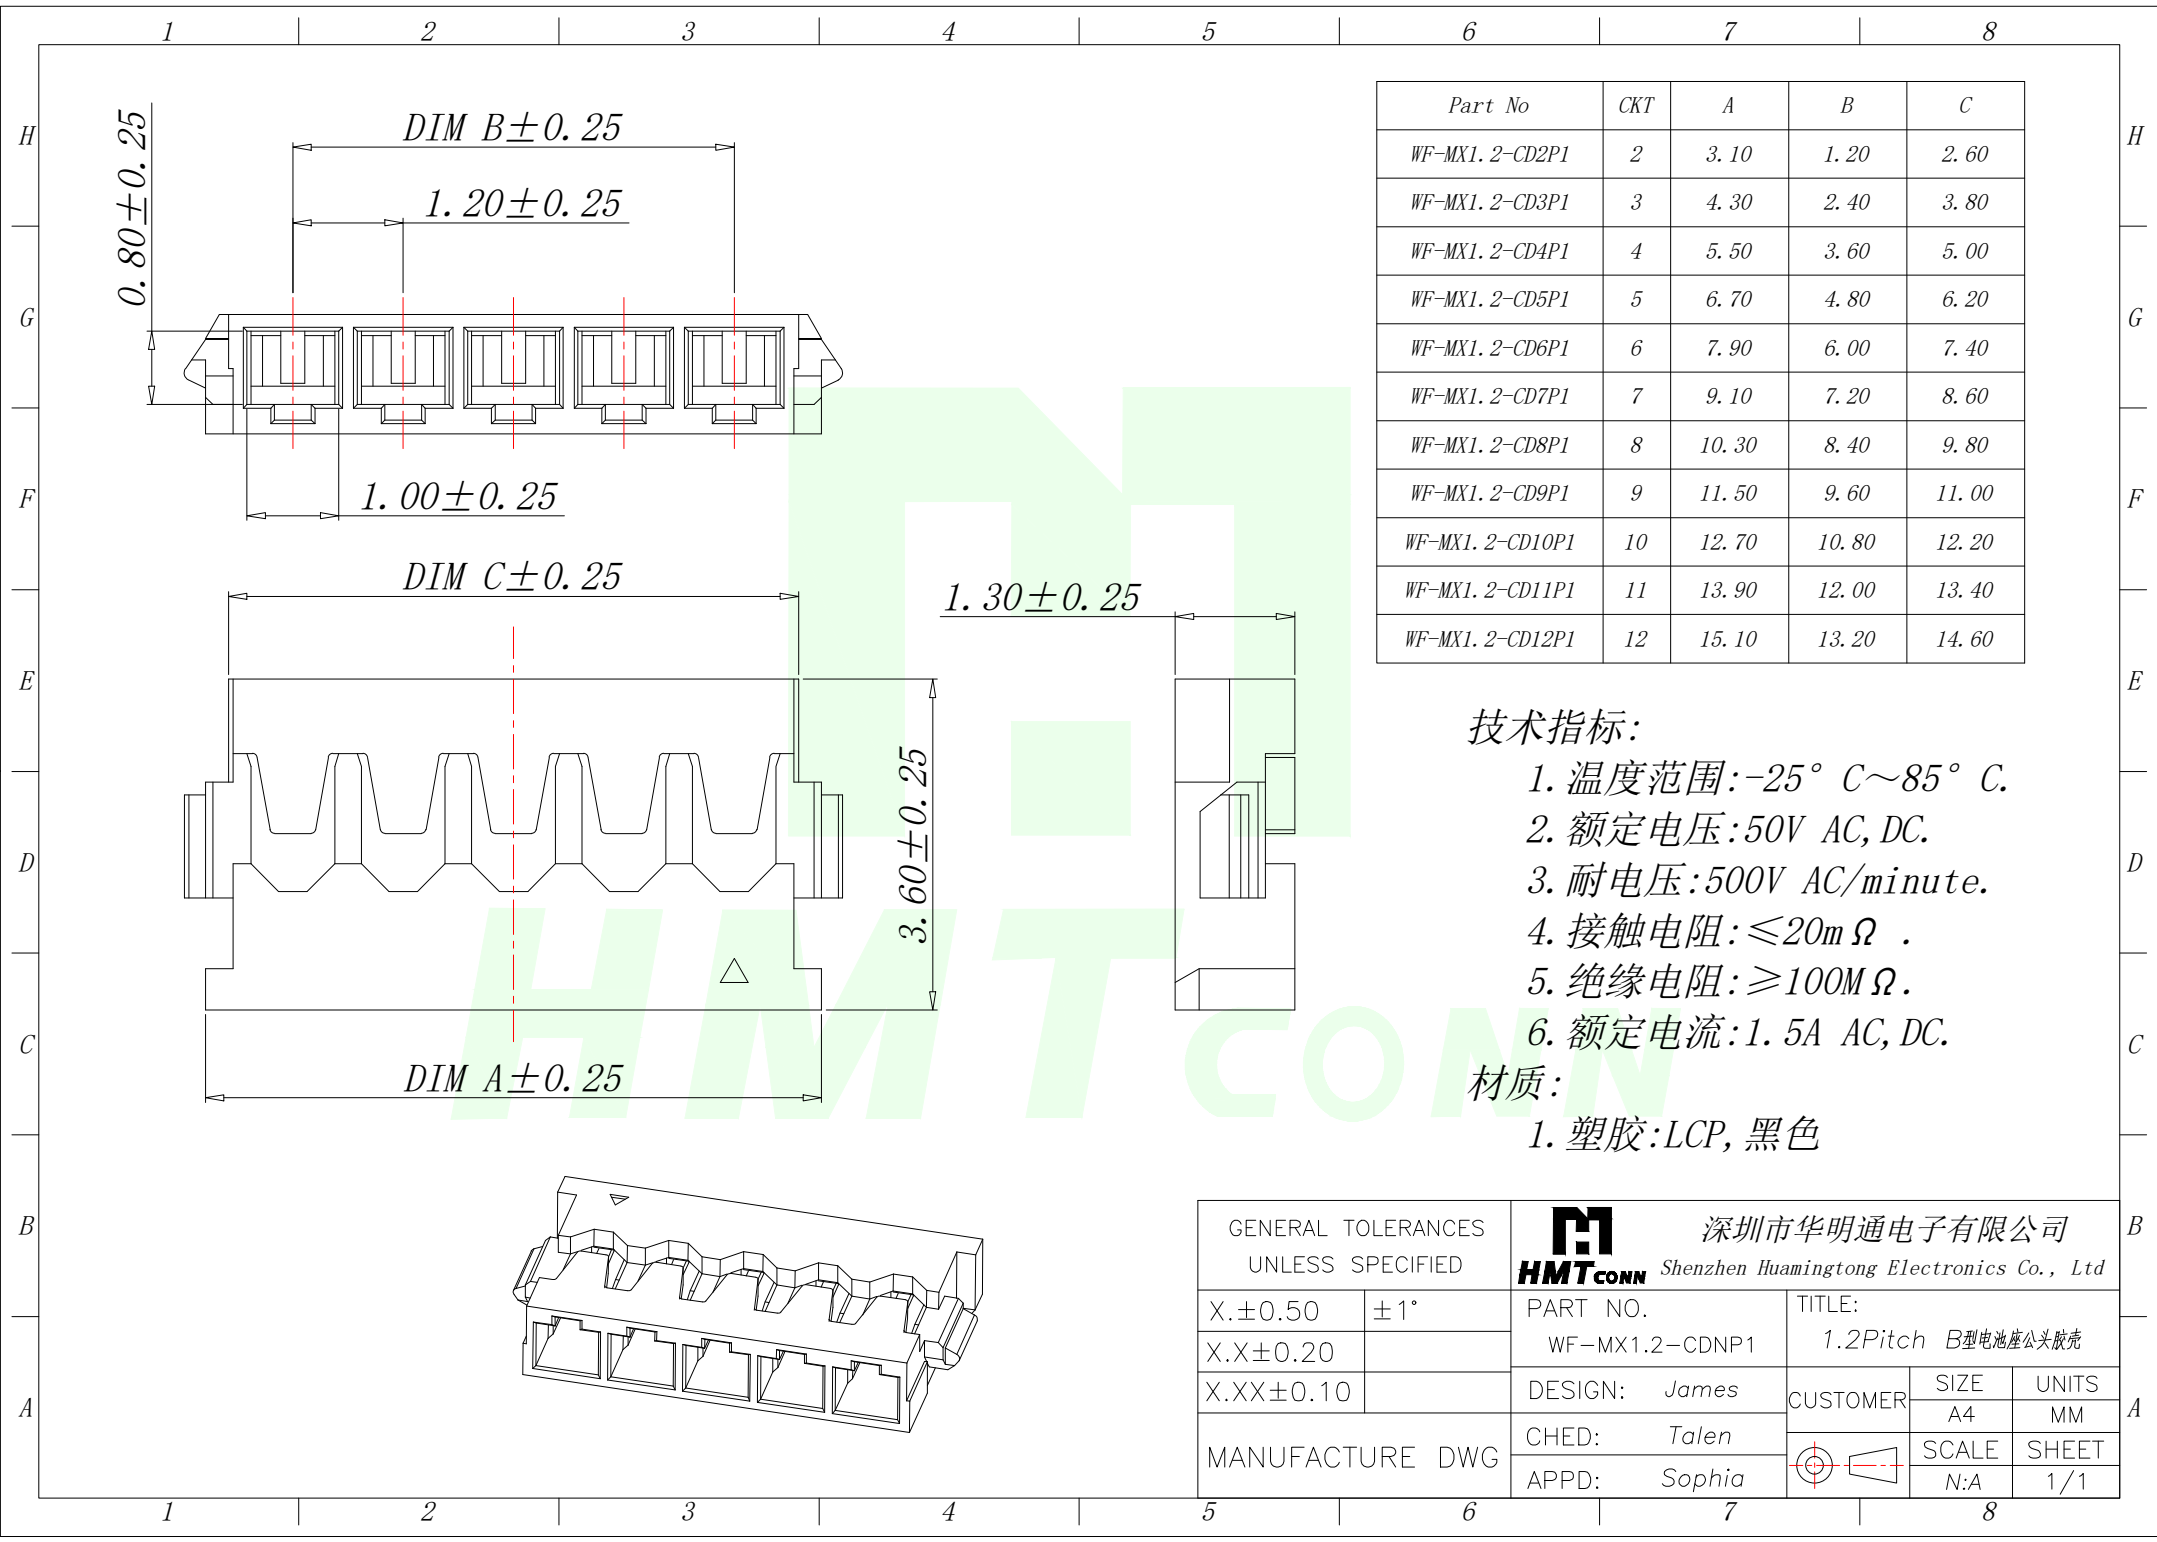

Part No	CKT	A	B	C
WF-MX1.2-CD2P1	2	3.10	1.20	2.60
WF-MX1.2-CD3P1	3	4.30	2.40	3.80
WF-MX1.2-CD4P1	4	5.50	3.60	5.00
WF-MX1.2-CD5P1	5	6.70	4.80	6.20
WF-MX1.2-CD6P1	6	7.90	6.00	7.40
WF-MX1.2-CD7P1	7	9.10	7.20	8.60
WF-MX1.2-CD8P1	8	10.30	8.40	9.80
WF-MX1.2-CD9P1	9	11.50	9.60	11.00
WF-MX1.2-CD10P1	10	12.70	10.80	12.20
WF-MX1.2-CD11P1	11	13.90	12.00	13.40
WF-MX1.2-CD12P1	12	15.10	13.20	14.60

技术指标:

1. 温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
2. 额定电压: 50V AC, DC.
3. 耐电压: 500V AC/minute.
4. 接触电阻: $\leq 20\text{m}\Omega$.
5. 绝缘电阻: $\geq 100\text{M}\Omega$.
6. 额定电流: 1.5A AC, DC.

材质:

1. 塑胶: LCP, 黑色

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd		
X.±0.50	±1°	PART NO. WF-MX1.2-CDNP1	TITLE: 1.2Pitch B型电池座公头胶壳	
X.X±0.20				
X.XX±0.10		DESIGN: James	CUSTOMER	SIZE
MANUFACTURE DWG		CHED: Talen		A4
		APPD: Sophia		UNITS MM
			SCALE N:A	SHEET 1/1