

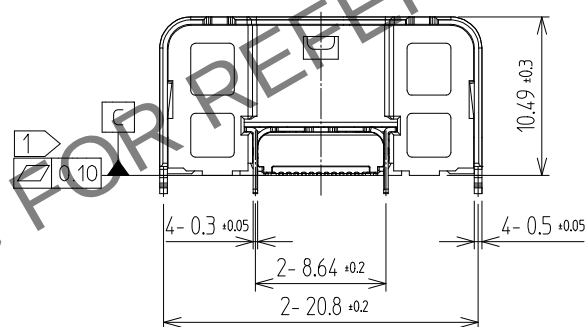

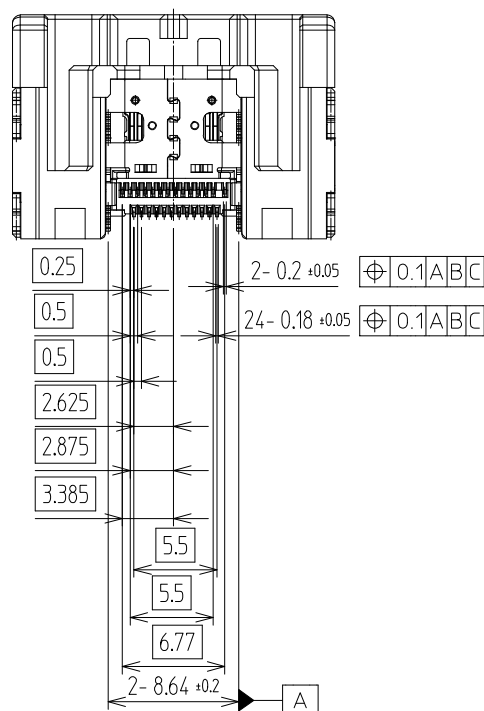
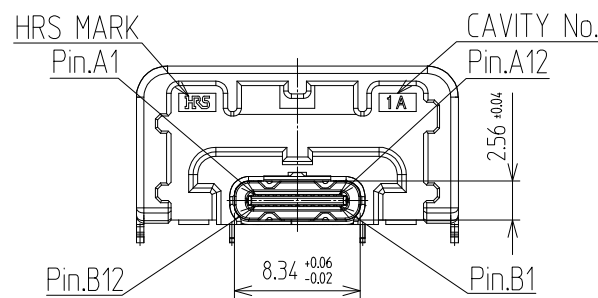


Aug.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


A
B
C
D
E
F

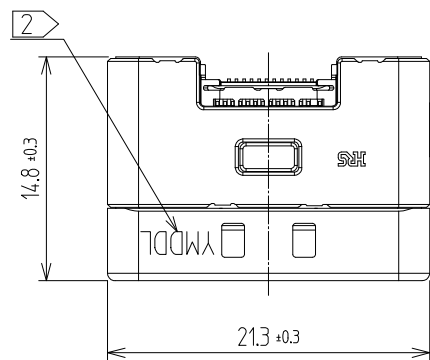

ISO-VIEW

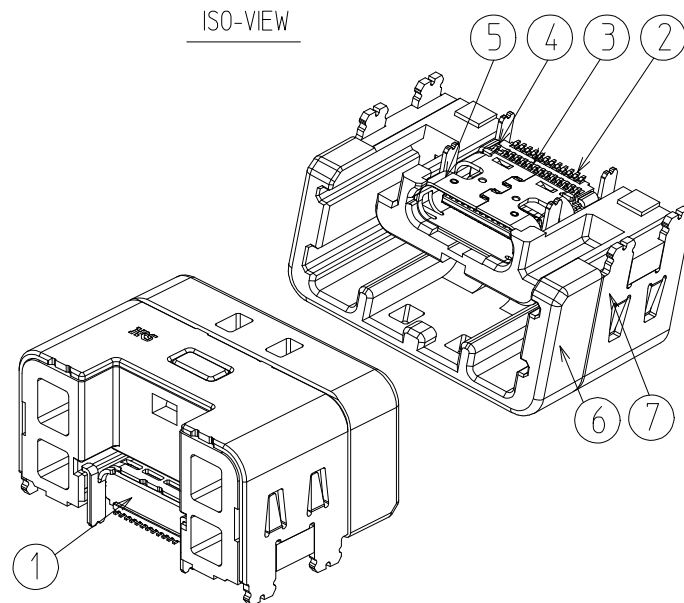

△[6] RECOMMENDED PCB LAYOUT (TOP-VIEW)
(GENERAL TOLERANCE : ±0.05)

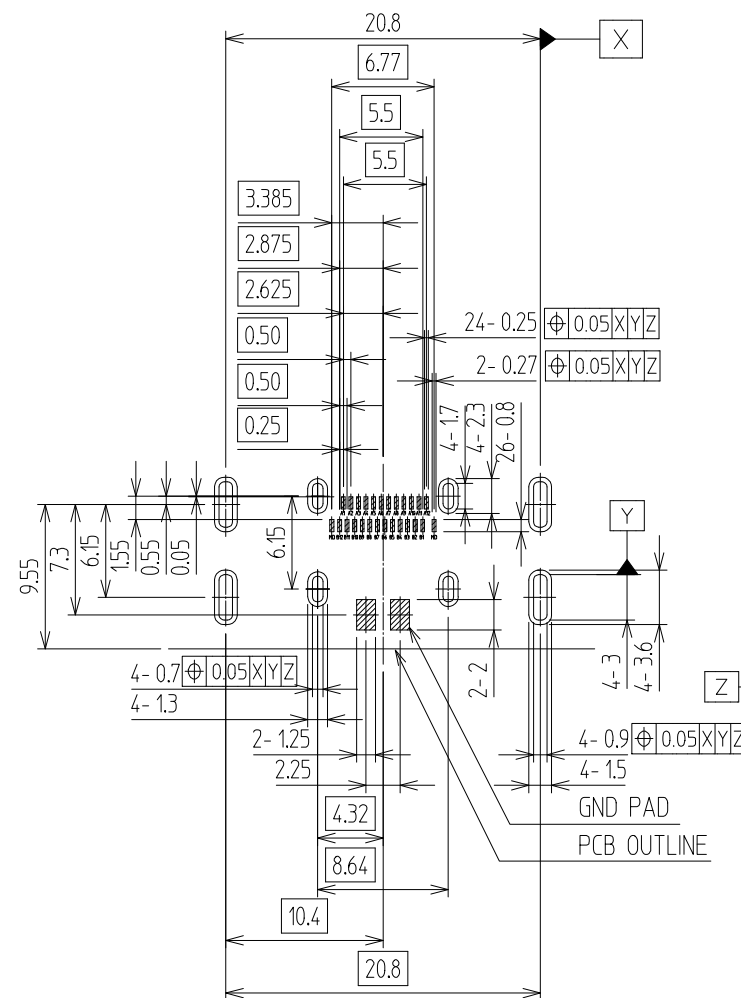

7	OUTER SHELL	STAINLESS STEEL	NICKEL PLATING	-
6	HOUSING COVER	THERMOPLASTIC	BLACK COLOR	UL94V-0
5	INNER SHELL	STAINLESS STEEL	NICKEL PLATING	-
4	MID PLATE	STAINLESS STEEL	THE OTHER AREA : NICKEL PLATING SOLDER AREA : GOLD OVER NICKEL	-
3	CONTACT B	COPPER	CONTACT AREA : GOLD OVER NICKEL SOLDER AREA : GOLD OVER NICKEL	-
2	CONTACT A	COPPER	CONTACT AREA : GOLD OVER NICKEL SOLDER AREA : GOLD OVER NICKEL	-
1	INSERT CASE	THERMOPLASTIC	BLACK COLOR	UL94V-0
NO.	DESCRIPTIONS	MATERIAL	FINISH	REMARKS
CODE NO. (OLD)			DRAWN PARK 25.01.21 I.K	DESIGNED HAN 25.01.21 M.Y
			CHECKED LIM 25.01.21 S.M	APPROVED LIM 25.01.21 S.M
			RELEASED ENG 26.04.06 DEPT	
DRAWING NO. EDC3-633776-05			PART NO. AU1FR-24P(805)	
SCALE 2:1 UNITS mm			CODE NO CL 6696-0003-1-805	
HRS HIROSE KOREA CO.,LTD.			1/2	

