

Electro-Static Discharge
TUSD18CBV
Bidirectional TVS Diode/Low Clamping Voltage

DFN1006



Pin Configuration



Features

- 40Watts Peak Pulse Power per Line (tp=8/20μs)
- Protects one birectional I/O line
- Low clamping voltage
- Working voltages : 18V
- Low leakage current

IEC Compatibility

- IEC61000-4-2 (ESD) ±15kV (air), ±15kV (contact)
- IEC61000-4-4 (EFT) 40A (5/50ηs)

Applications

- USB 2.0 and USB 3.0
- HDMI 1.3,HDMI 1.4 and HDMI 2.0
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- SATA and eSATAinterface
- IEEE 1394
- DVI

Mechanical Characteristics

- JEDEC DFN1006 Package
- Molding Compound Flammability Rating : UL 94V-O
- Quantity Per Reel : 10,000pcs
- Reel Size : 7 inch
- Lead Finish : Lead Free

Maximum Ratings(T_A=25℃ unless otherwise specified)

Parameter	Symbol	Value	Units
Peak Pulse Power(tp=8/20μs)	P_{PP}	40	Watts
Lead Soldering Temperature	T_L	260(10 sec.)	℃
Operating Temperature Range	T_J	-40~85	℃
Storage Temperature Range	T_{STG}	-55~150	℃

Electrical Characteristics(T_A=25℃ unless otherwise specified)

TUSD18CBV(Marking:8U)


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Reverse Stand-off Voltage	V_{RWM}				18	V
Breakdown Voltage	V_{BR}	I_T=1mA	18.5			V
Clamping Voltage [1]	V_C	I_{PP}=1A,tp=8/20μs		5	6	V
		I_{PP}=4A,tp=8/20μs		9	10	V
Clamping Voltage [2]	V_C	V_{ESD} =8kv		10		
Reverse Leakage Current	I_R	@V_{RWM}			1	μA
Junction Capacitance	$C_{I/O}$	0Vdc,f=1MHz Between I/O Pins and GND		0.4	0.55	pF

Notes:

1) Contact dischage mode ,accodin to IEC61000-4-2

2) Non-repetitive current pulse ,accodin to IEC61000-4-5

Electrical Characteristics(T_A=25℃ unless otherwise specified)

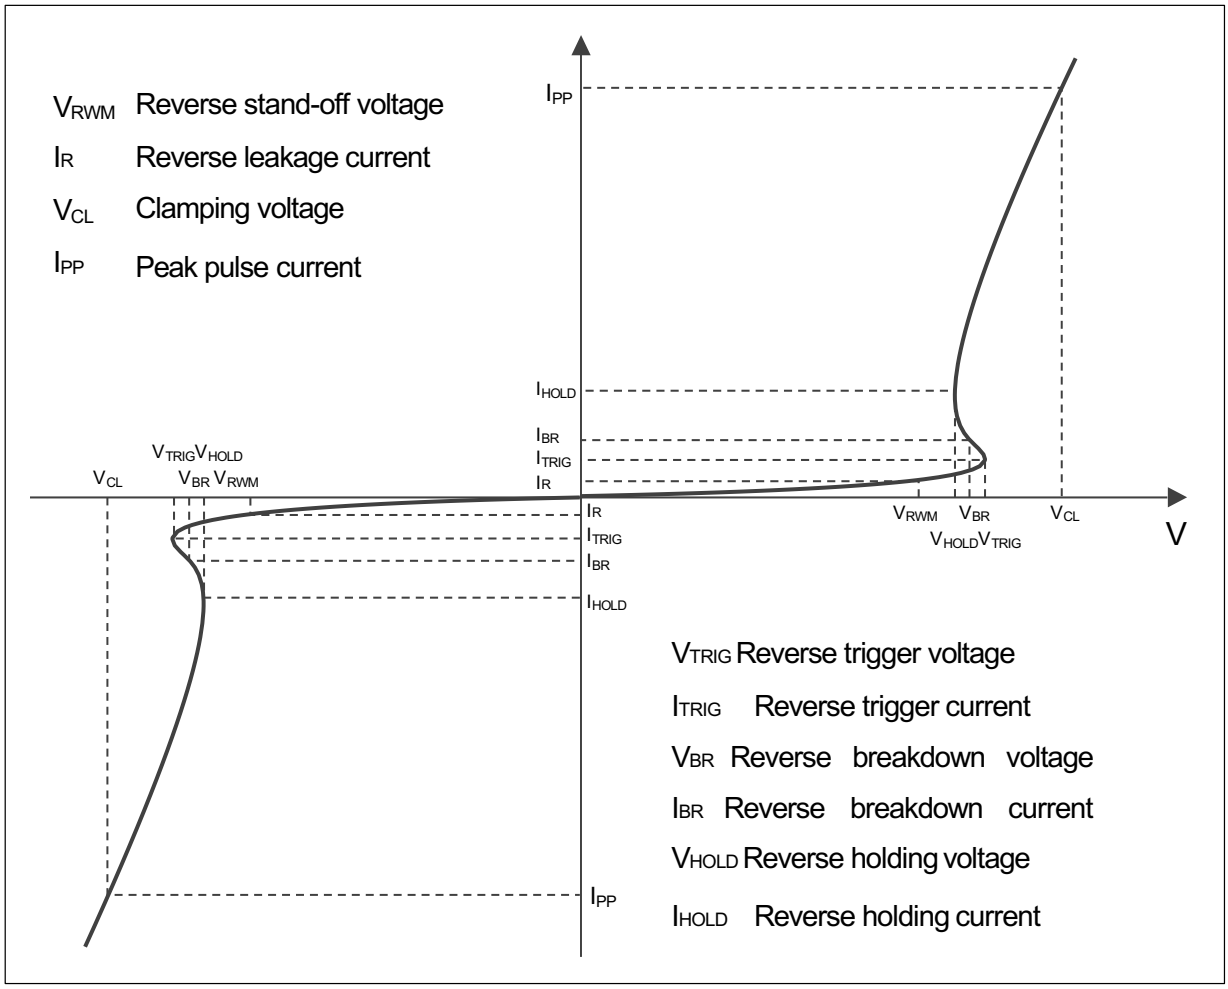

Ratings and Characteristic Curves

Fig.1 Non-Repetitive Pulse Power vs.Pulse Time

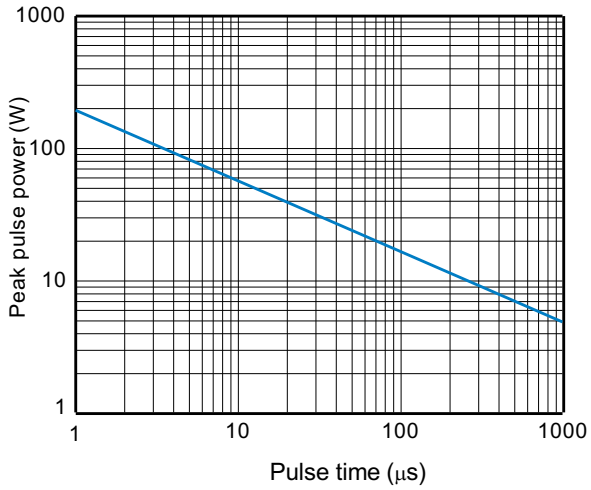


Fig.2 Pulse Waveform

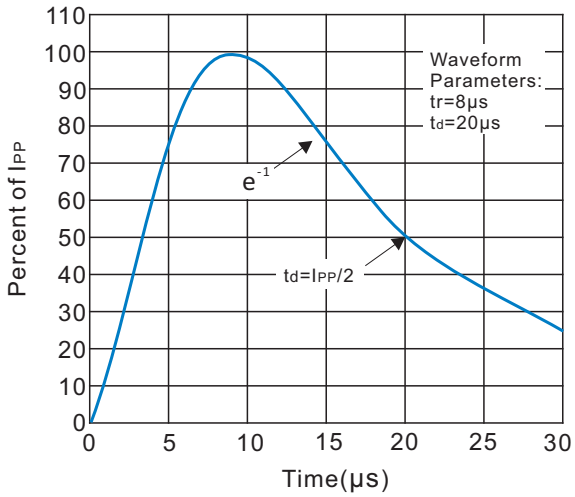


Fig.3 Power Derating Curve



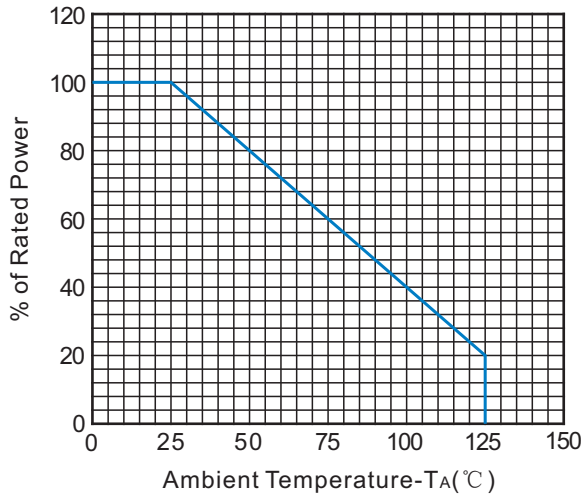



Fig.4 Contact discharge current waveform per IEC61000-4-2

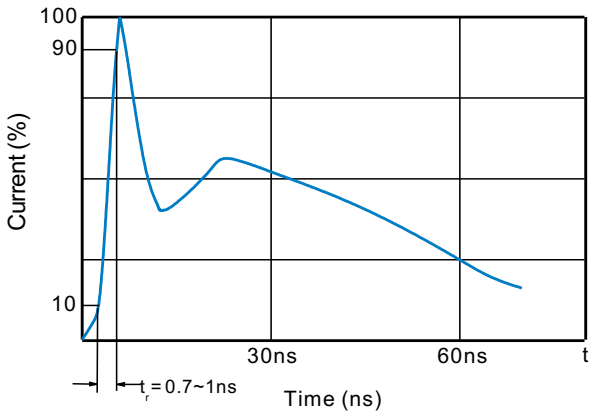


Dimensions(DFN1006)

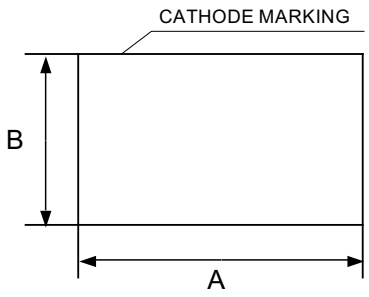

Top View

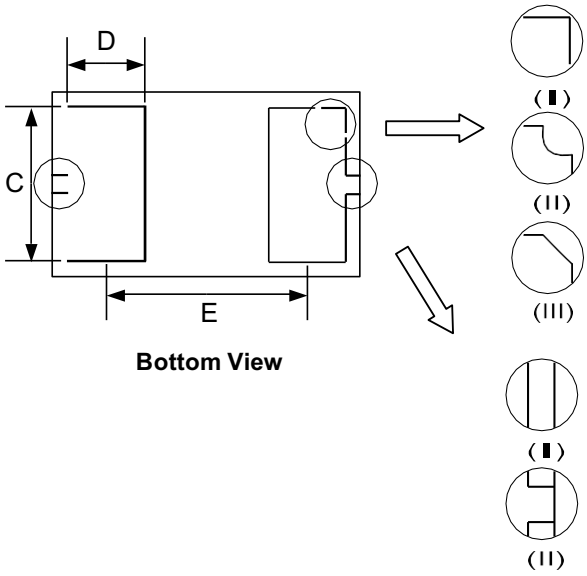

Bottom View



Side View

DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	0.95	1.08	0.037	0.043
B	0.55	0.68	0.022	0.027
C	0.45	0.55	0.017	0.022
D	0.20	0.40	0.008	0.016
E	0.65BSC		0.026BSC	
F	0.34	0.55	0.013	0.022
G	0.00	0.10	0.000	0.004