
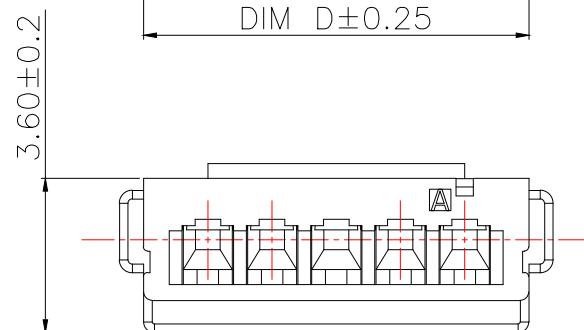
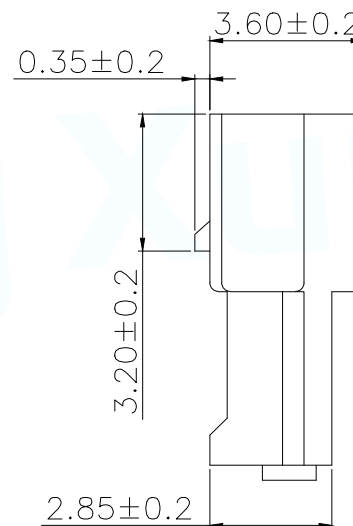
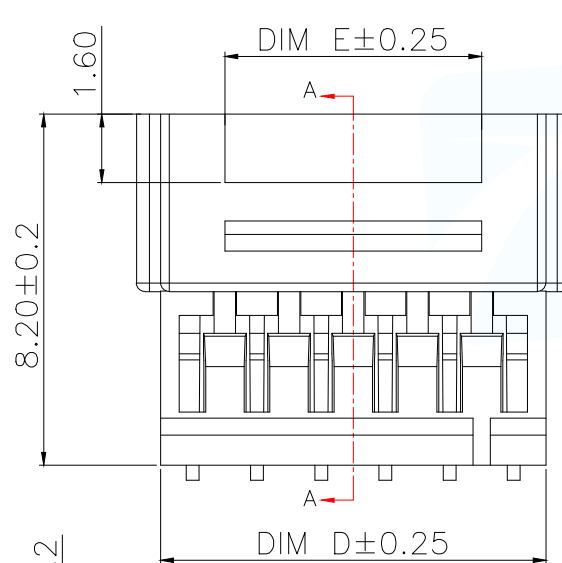
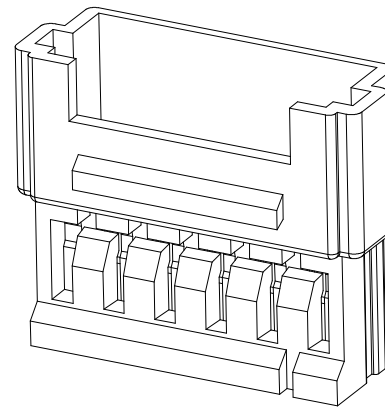


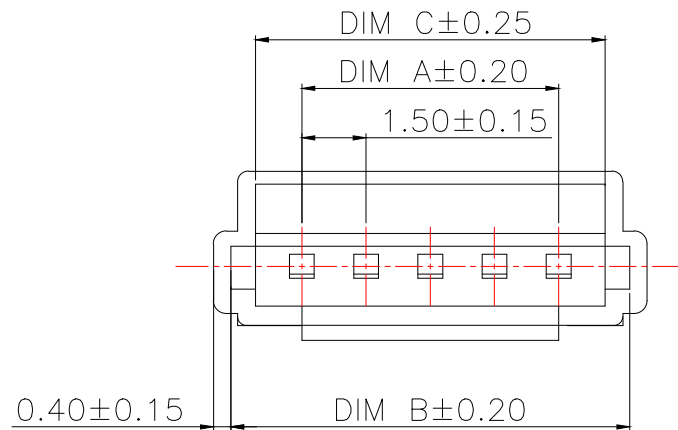

PART NO	PIN	A	B	C	D	E
WAFER-ZH1.5-2PJK-KMW	2	1.50	4.82	3.66	4.50	3.00
WAFER-ZH1.5-3PJK-KMW	3	3.00	6.32	5.16	6.00	3.00
WAFER-ZH1.5-4PJK-KMW	4	4.50	7.82	6.66	7.50	4.50
WAFER-ZH1.5-5PJK-KMW	5	6.00	7.90	8.16	9.00	6.00
WAFER-ZH1.5-6PJK-KMW	6	7.50	9.40	9.66	10.50	7.50
WAFER-ZH1.5-7PJK-KMW	7	9.00	10.90	11.16	12.00	9.00
WAFER-ZH1.5-8PJK-KMW	8	10.50	12.40	12.66	13.50	10.50
WAFER-ZH1.5-9PJK-KMW	9	12.00	13.90	14.16	15.00	12.00
WAFER-ZH1.5-10PJK-KMW	10	13.50	15.40	15.66	16.50	13.50
WAFER-ZH1.5-11PJK-KMW	11	15.00	16.90	17.16	18.00	15.00
WAFER-ZH1.5-12PJK-KMW	12	16.50	18.40	18.66	19.50	16.50
WAFER-ZH1.5-13PJK-KMW	13	18.00	19.90	20.16	21.00	18.00
WAFER-ZH1.5-14PJK-KMW	14	19.50	21.40	21.66	22.50	19.50
WAFER-ZH1.5-15PJK-KMW	15	21.00	22.90	23.16	24.00	21.00
WAFER-ZH1.5-16PJK-KMW	16	22.50	24.40	24.66	25.50	22.50

技术指标:

1. 温度范围: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
2. 额定电压: 100V AC, DC .
3. 耐压: 500V AC/minute .
4. 接触电阻: $\leq 20\text{m}\Omega$.
5. 绝缘电阻: $\geq 500\text{M}\Omega$.
6. 额定电流: 1A AC, DC .

材料:

1. 塑胶: PA66 白色

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:	TITLE: ZH1.5 WTB 每座带扣胶壳		
X.: ± 0.50	$\pm 1^{\circ}$	PAR	WAFER-ZH1.5-NPJK-KMW	
X.X: ± 0.20		DWN	Lucas	
X.XX: ± 0.10		CHKD	Ethan	
		APVD	Jacob	
		SCALE: 1:1	UNIT: MM	
		CUSTOMER COPY	SIZE: A4	SHEET: 1F1
				REV: A