BCW120N80M2

N-Channel Silicon Carbide Power MOSFET

1200 V, 32 A, 80 mΩ

bestirpower

Features

- High switching speed with a low gate charge
- Fast intrinsic diode with low reverse recovery
- Robust Avalanche Capability
- 100% Avalanche Tested
- Pb-free, Halogen Free, and RoHS Compliant

$BV_{DSS,\ Tc=25℃}$	$I_{D,\ Tc=25℃}$	$R_{DS(on),typ}$	$Q_{g,typ}$
1200 V	32 A	80 mΩ	28 nC

Benefits

- System efficiency improvement
- Higher frequency applicability
- Increased power density
- Reduced cooling effort





Applications

- Solar inverter
- EV charging station
- UPS
- Industrial power supply

Absolute Maximum Ratings (T_J = 25℃ unless otherwise noted)

Symbol	Parameter		Value	Unit
V_{DSS}	Drain to Source Voltage		1200	V
V_{GS}	Gate to Source Voltage (DC)		-10 / +22	V
V_{GSop}	Recommended Operation Value		-5...-3 / +18	V
I_D	Drain Current	Continuous(T_C = 25℃) (Note1)	32	A
		Continuous (T_C = 100℃)	22	
I_{DM}	Drain Current	Pulsed (Note1)	79	A
P_D	Power Dissipation	(T_C = 25℃)	150	W
		Derate Above 25℃	1.0	W/℃
T_J, T_{STG}	Operating and Storage Temperature Range		-55 to 175	℃

Thermal Characteristics

Symbol	Parameter	Value	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case, Max.	1.0	℃/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient, Max.	40	
T_{sold}	Soldering temperature, wave soldering only allowed at leads	260	℃

Electrical Characteristics (T_J= 25℃ unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Off Characteristics						
BV_{DSS}	Drain to Source Breakdown Voltage	V_{GS} = 0 V, I_D = 1 mA	1200	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 1200 V, V_{GS} = 0 V	-	1	100	μA
		V_{DS} = 1200 V, V_{GS} = 0 V, T_J = 175℃	-	10	-	μA
I_{GSS}	Gate-Source Leakage Current	V_{GS} = +22 V, V_{DS} = 0 V	-	-	+100	nA
		V_{GS} = -10 V, V_{DS} = 0 V	-	-	-100	
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS} = V_{DS}, I_D = 5 mA (tested after VGS= 22 V, 1 ms pulse)	2.0	3.0	4.5	V
$R_{DS(on)}$	Static Drain to Source On Resistance	V_{GS} = 18 V, I_D = 14 A	-	80	108	mΩ
		V_{GS} = 18 V, I_D = 14 A, T_J = 175℃	-	128	-	
		V_{GS} = 15 V, I_D = 14 A,	-	109	-	
g_{fs}	Transconductance	V_{DS} = 20 V, I_D = 14 A	-	9.4	-	S
Dynamic Characteristics						
C_{iss}	Input Capacitance	V_{DS} = 800 V, V_{GS} = 0V, f = 250 kHz	-	807	-	pF
C_{oss}	Output Capacitance		-	52	-	
C_{rss}	Reverse Capacitance		-	1	-	
E_{oss}	Stored Energy in Output Capacitance	V_{DS} = 0 V to 800 V, V_{GS} = 0 V	-	22	-	μJ
$C_{o(er)}$	Energy Related Output Capacitance		-	68	-	pF
$C_{o(tr)}$	Time Related Output Capacitance		-	106	-	
$Q_{g(tot)}$	Total Gate Charge	V_{DS} = 800 V, ID = 14 A, V_{GS} = -3 V / 18 V, Inductive load	-	28	-	nC
Q_{gs}	Gate to Source Charge		-	9	-	
Q_{gd}	Gate to Drain “Miller” Charge		-	5	-	
R_G	Internal Gate Resistance	f = 1MHz, V_{AC}=30mV	-	4.2	-	Ω
Switching Characteristics						
$t_{d(on)}$	Turn-On Delay Time	V_{DS} = 800 V, I_D = 14 A, V_{GS} = -3 V / 18 V, R_G = 6.8Ω, Inductive load	-	13	-	ns
t_r	Turn-On Rise Time		-	9	-	
$t_{d(off)}$	Turn-Off Delay Time		-	23	-	
t_f	Turn-Off Fall Time		-	9	-	
E_{on}	Turn-on Switching Energy		-	78	-	uJ
E_{off}	Turn-off Switching Energy		-	34	-	
E_{tot}	Total Switching Energy		-	112	-	

Source-Drain Diode Characteristics

I_S	Continuous Diode Forward Current	V_{GS} = -3 V (Note1)	-	-	32	A
I_{SM}	Pulsed Diode Forward Current	V_{GS} = -3 V (Note1)	-	-	79	
V_{SD}	Diode Forward Voltage	V_{GS} = -3 V, I_{SD} = 14 A	-	4.3	-	V
t_{rr}	Reverse Recovery Time	V_{DD} = 800 V, I_{SD} = 14 A, dI_F/dt = 3000 A/μs,Includes Qoss	-	11	-	ns
Q_{rr}	Reverse Recovery Charge		-	120	-	nC
I_{rrm}	Peak Reverse Recovery Current		-	17	-	A

※Note 1 : Limited by maximum junction temperature.

Typical Performance Characteristics

Figure 1. On-Region Characteristics T_J = -40℃

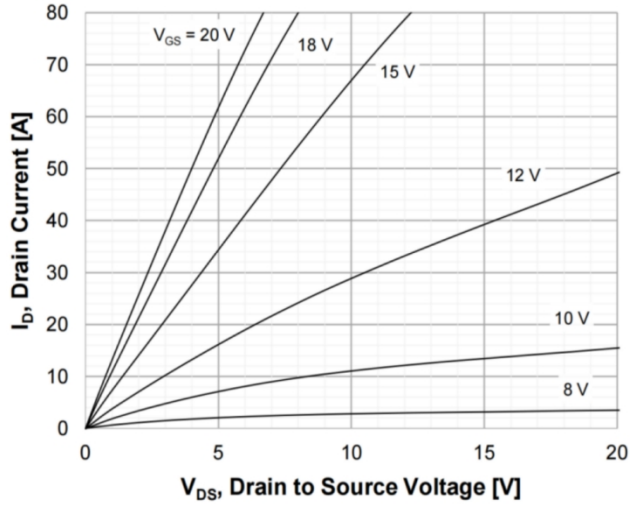

Figure 2. On-Region Characteristics T_J = 25℃

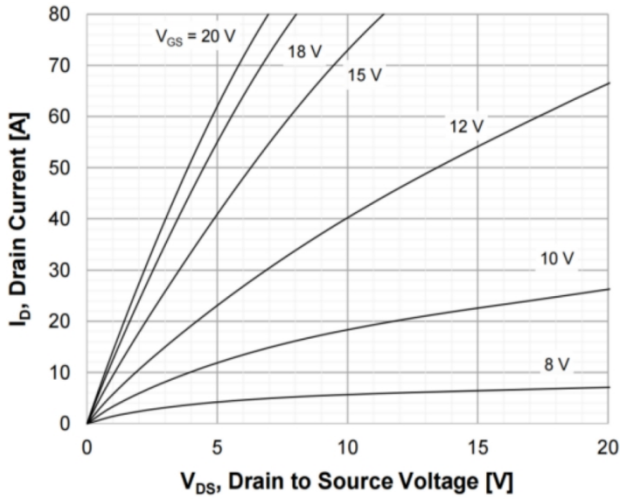

Figure 3. On-Region Characteristics T_J = 175℃

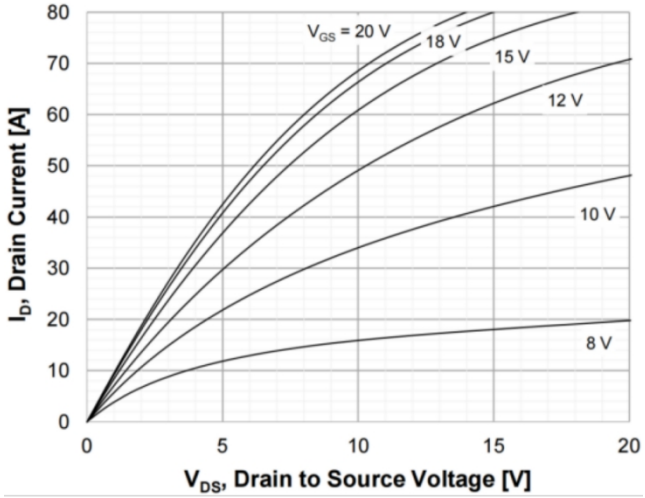

Figure 4. Normalized On-Resistance vs.Temperature

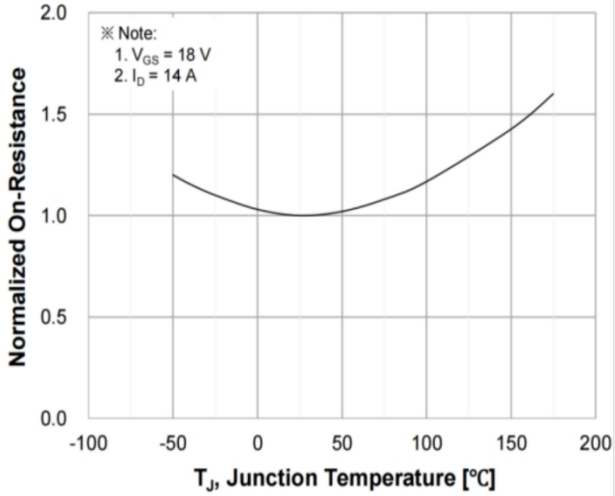

Figure 5. Transfer Characteristics

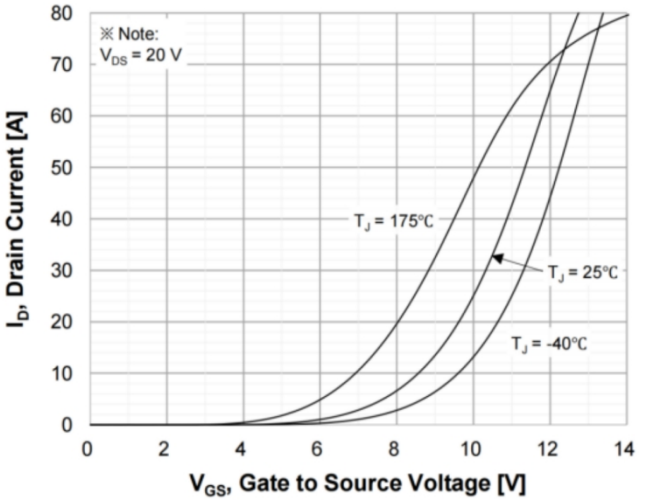

Figure 6. Diode Forward Voltage Characteristics vs. Source-Drain Current T_J = -40℃

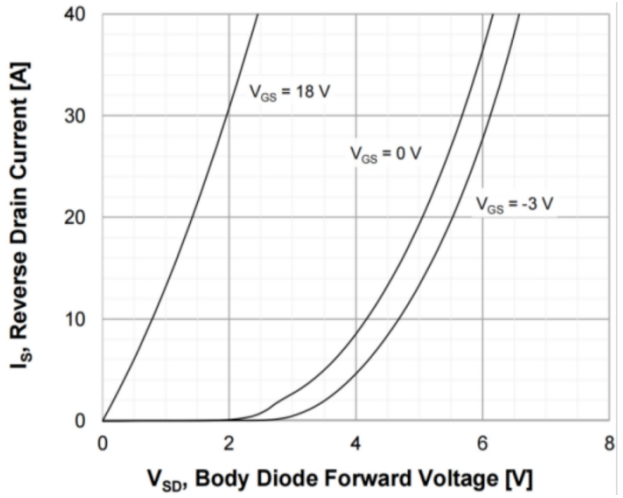

Typical Performance Characteristics

Figure 7. Diode Forward Voltage Characteristics vs. Source-Drain Current T_J = 25℃

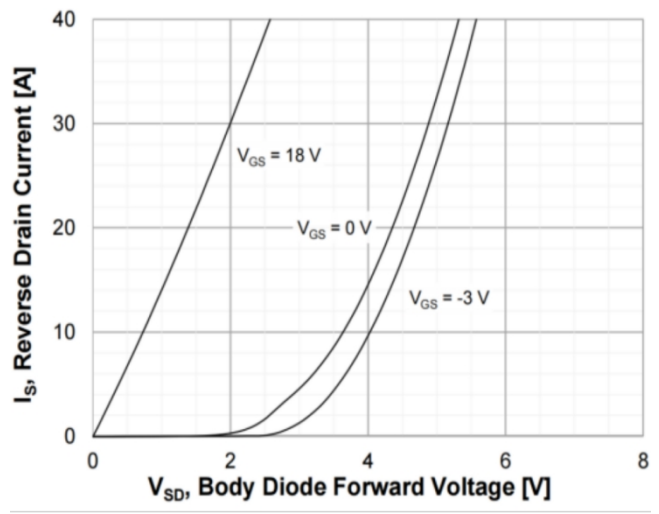

Figure 8. Diode Forward Voltage Characteristics vs. Source-Drain Current T_J = 175℃

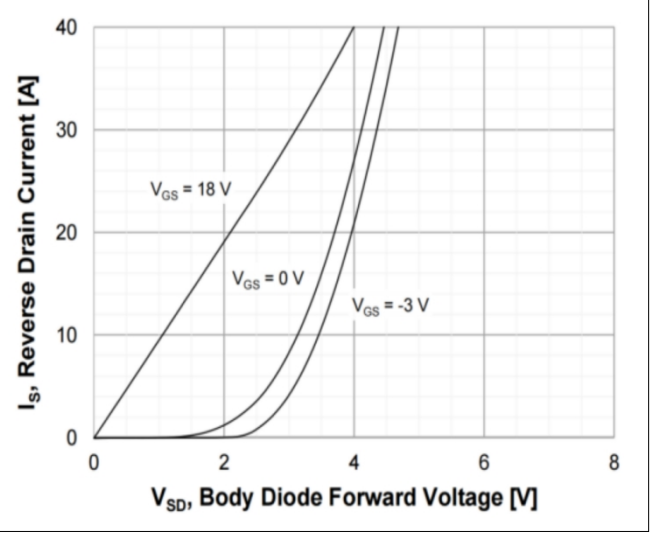

Figure 9. Threshold Voltage vs. Temperature

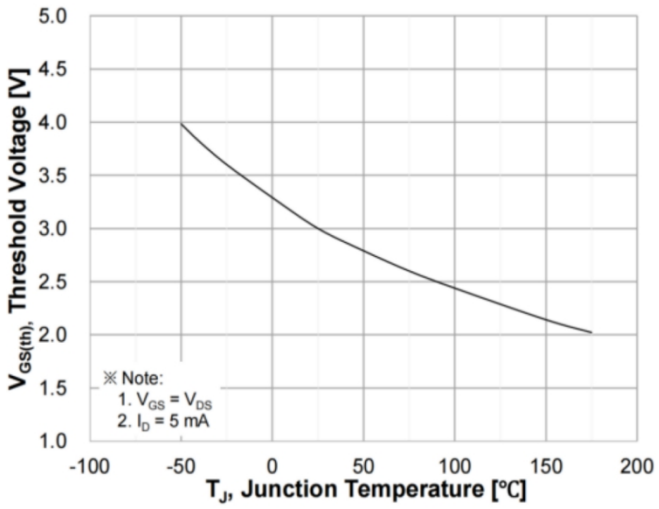

Figure 10. Gate Charge Characteristics

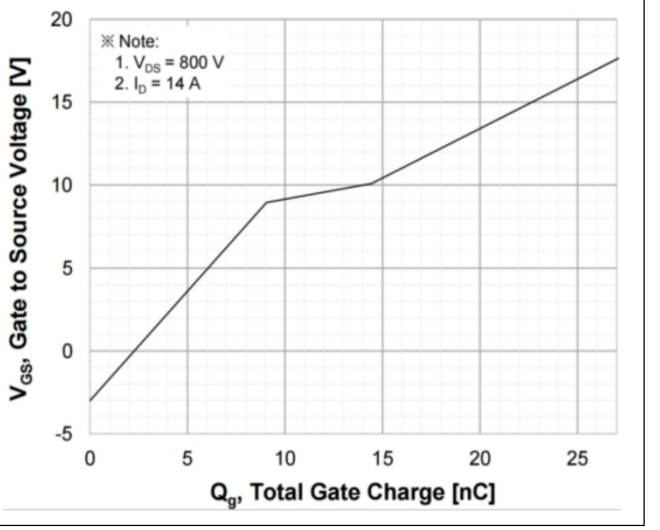

Figure 11. Stored Energy in Output Capacitance

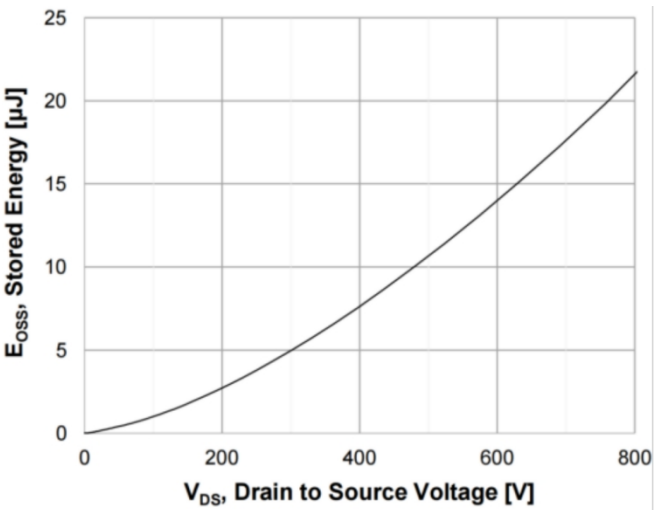

Figure 12. Capacitance Characteristics

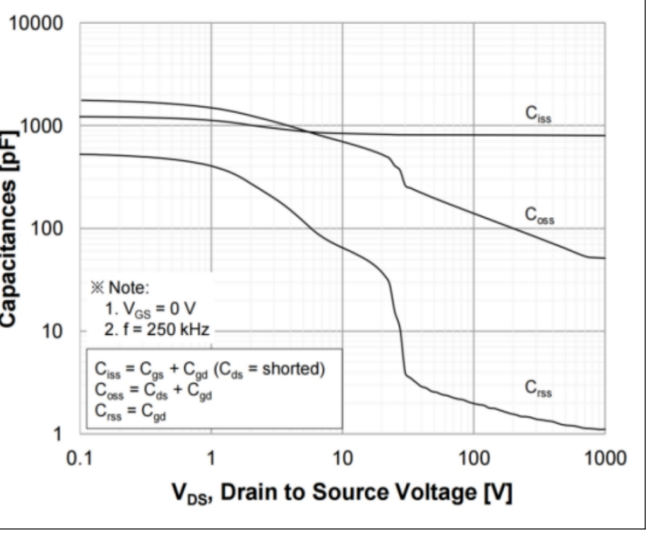

Typical Performance Characteristics

Figure 13. Continuous Drain Current Derating vs. Case Temperature

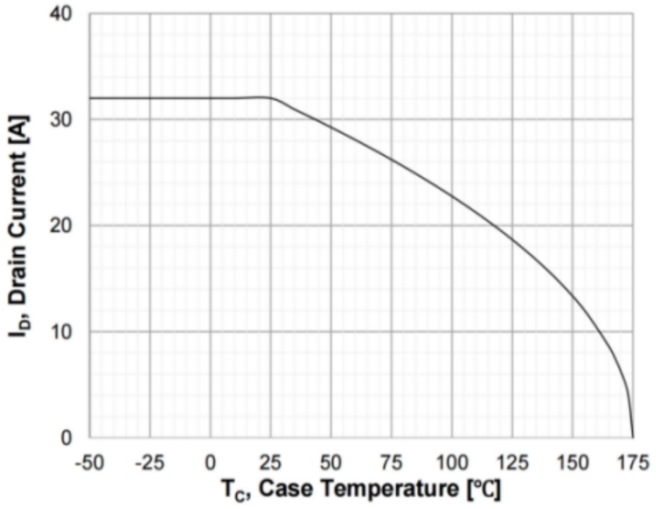

Figure 14. Maximum Power Dissipation Derating vs. Case Temperature

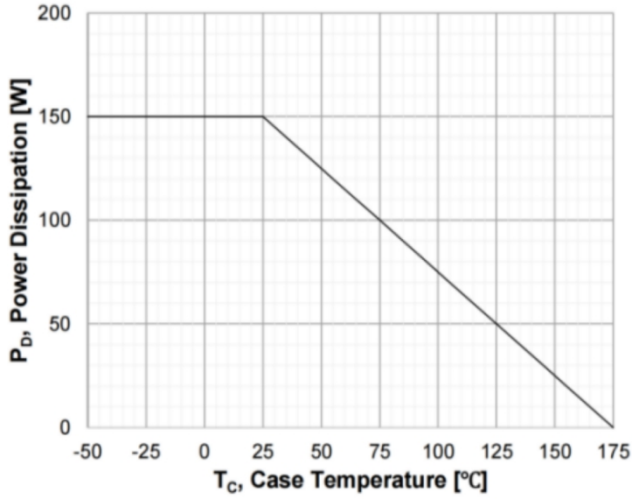

Figure 15. Typ. Switching Losses vs. Drain Current

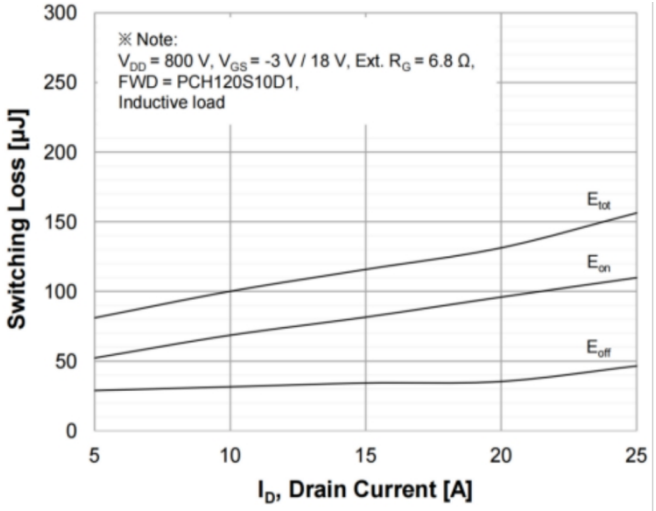

Figure 16. Typ. Switching Losses vs. Gate Resistance

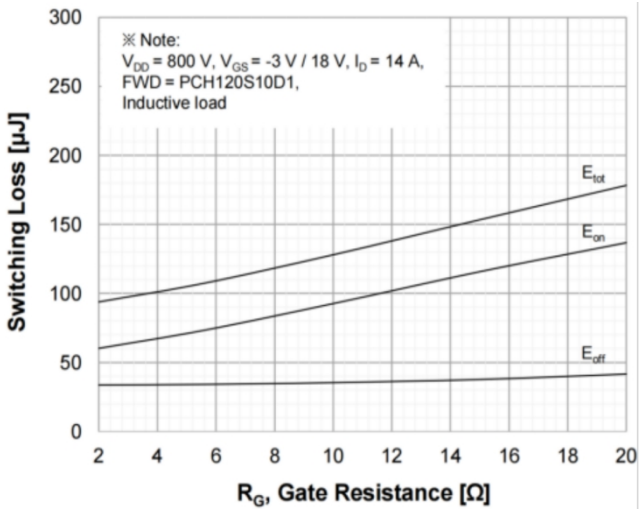

Figure 17. Typ. Switching Losses vs. Drain Current

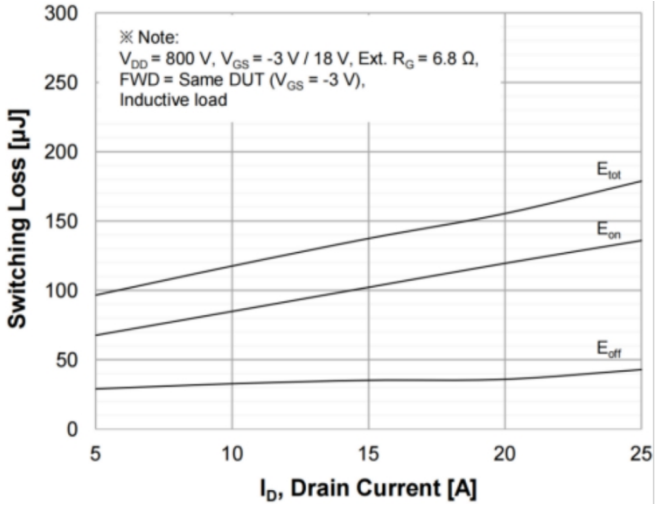

Figure 18. Typ. Switching Losses vs. Gate Resistance

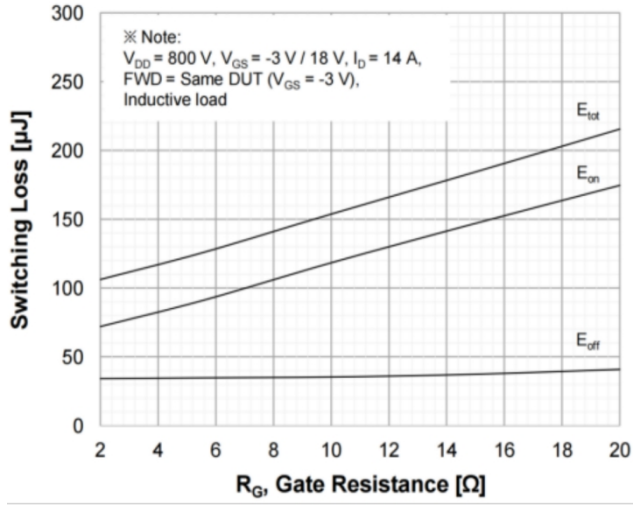

Typical Performance Characteristics

Figure 19. Maximum Safe Operating Area

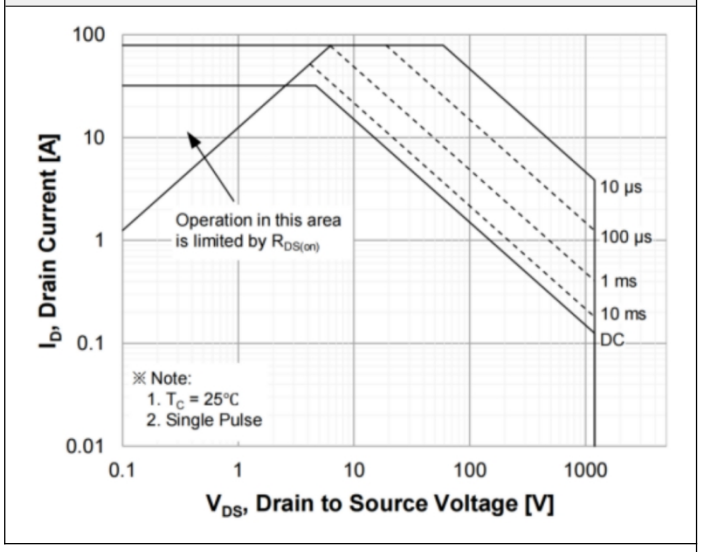

Figure 20. Transient Thermal Response Curve

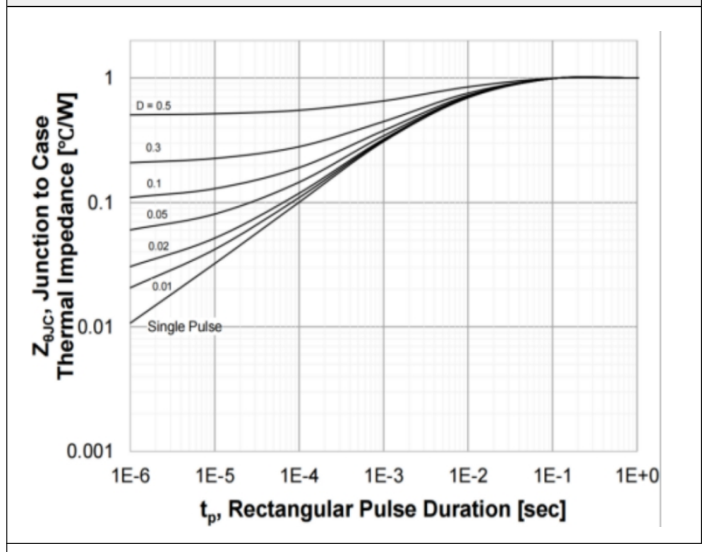

Figure 21. Inductive Load Switching Test Circuit and Waveforms

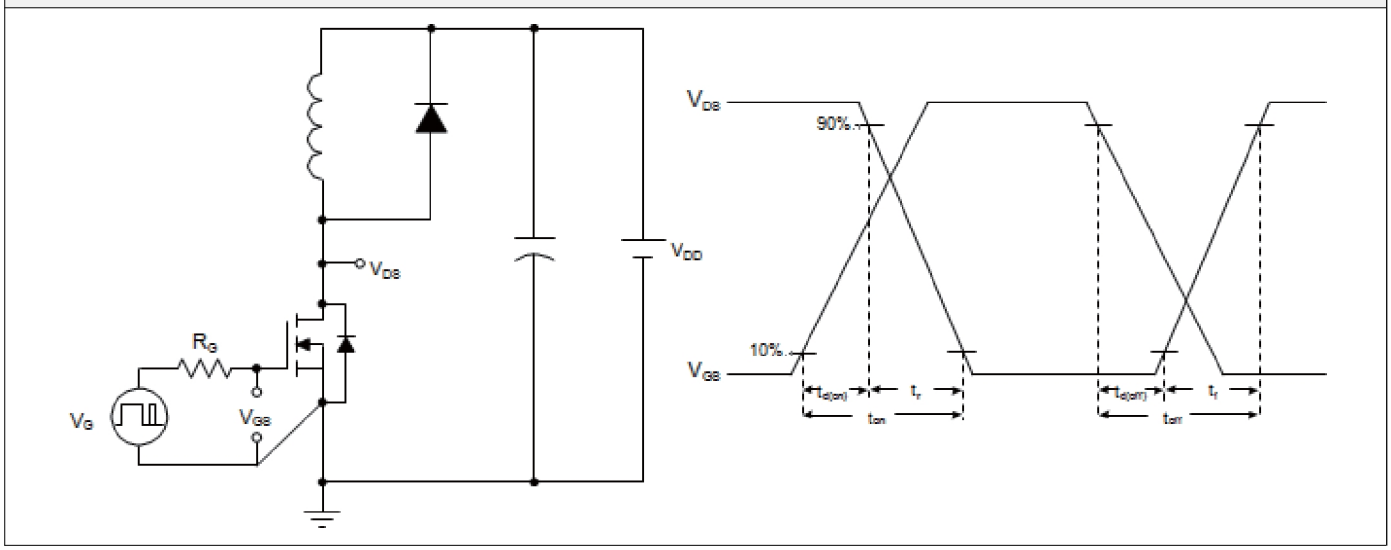

Figure 22. Peak Diode Recovery dv/dt Test Circuit and Waveforms

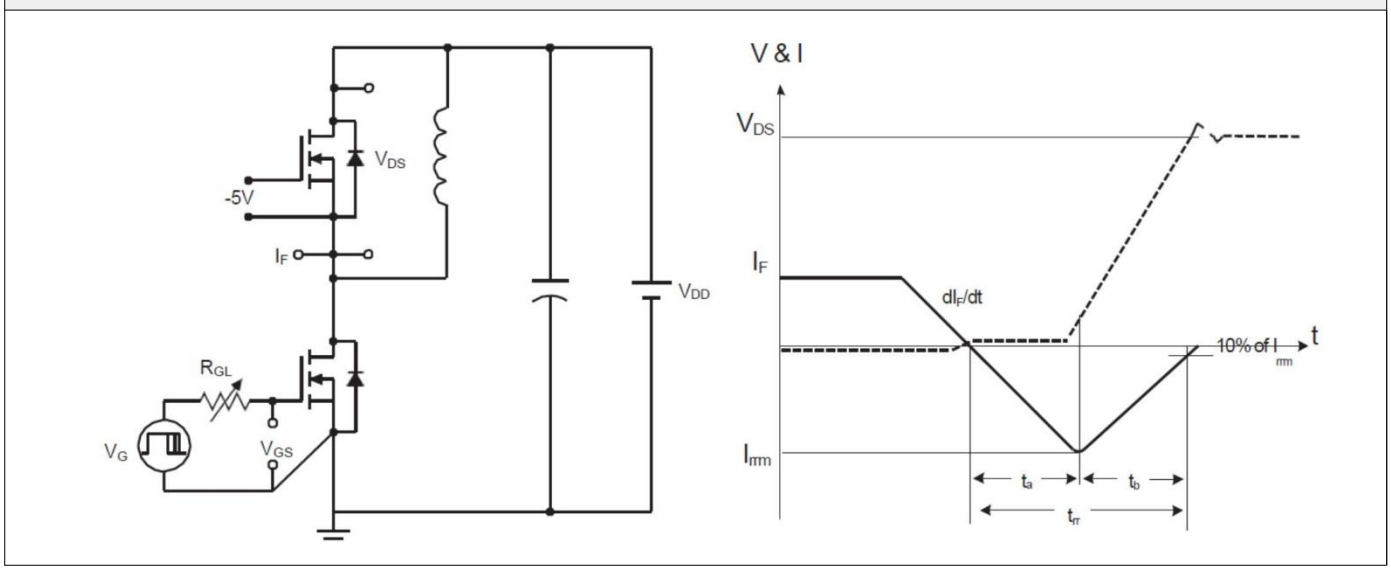

Package Outlines

TO247-3

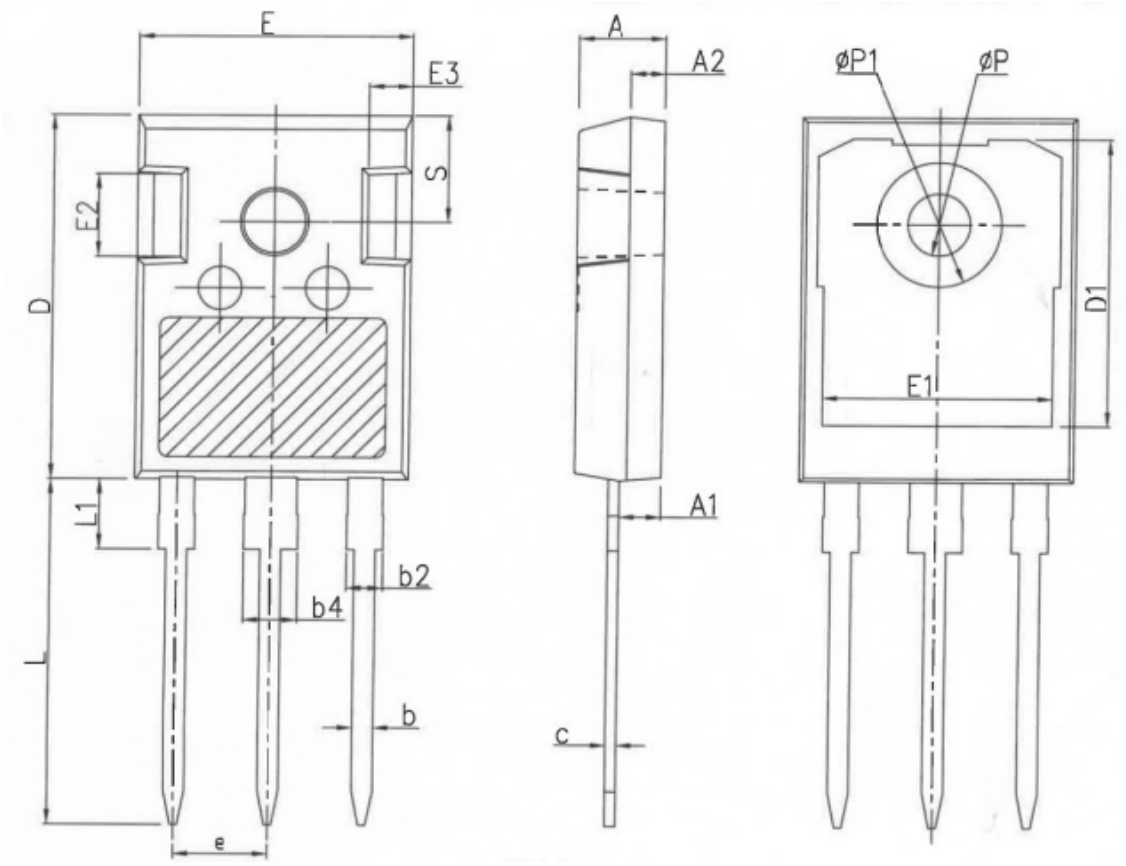

COMMON DIMENSIONS

SYMBOL	mm		
	MIN	NOM	MAX
A	4.80	5.00	5.20
A1	2.21	2.41	2.59
A2	1.85	2.00	2.15
b	1.11	1.21	1.36
b2	1.91	2.01	2.21
b4	2.91	3.01	3.21
c	0.51	0.61	0.75
D	20.70	21.00	21.30
D1	16.25	16.55	16.85
E	15.50	15.80	16.10
E1	13.00	13.30	13.60
E2	4.80	5.00	5.20
E3	2.30	2.50	2.70
e	5.44BSC		
L	19.62	19.92	20.22
L1	–	–	4.30
ΦP	3.40	3.60	3.80
ΦP1	–	–	7.30
S	6.15BSC		

* Dimensions in millimeters

Package Marking and Ordering Information

Part Number	Top Marking	Package	Packing Method	Quantity
BCW120N80M2	BCW120N80M2	TO247-3L	Tube	30 units

Disclaimer

Bestirpower reserve the right to make changes, corrections, enhancements, modifications, and improvements to Bestirpower products and/orto this document at any time without notice.

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. Bestirpower does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Products or technical information described in this document.

This document is the property of Bestirpower Co,. LTD., and not allowed to copy or transformed to other format if not under the authority approval.

© 2026 Bestirpower – All rights reserved