


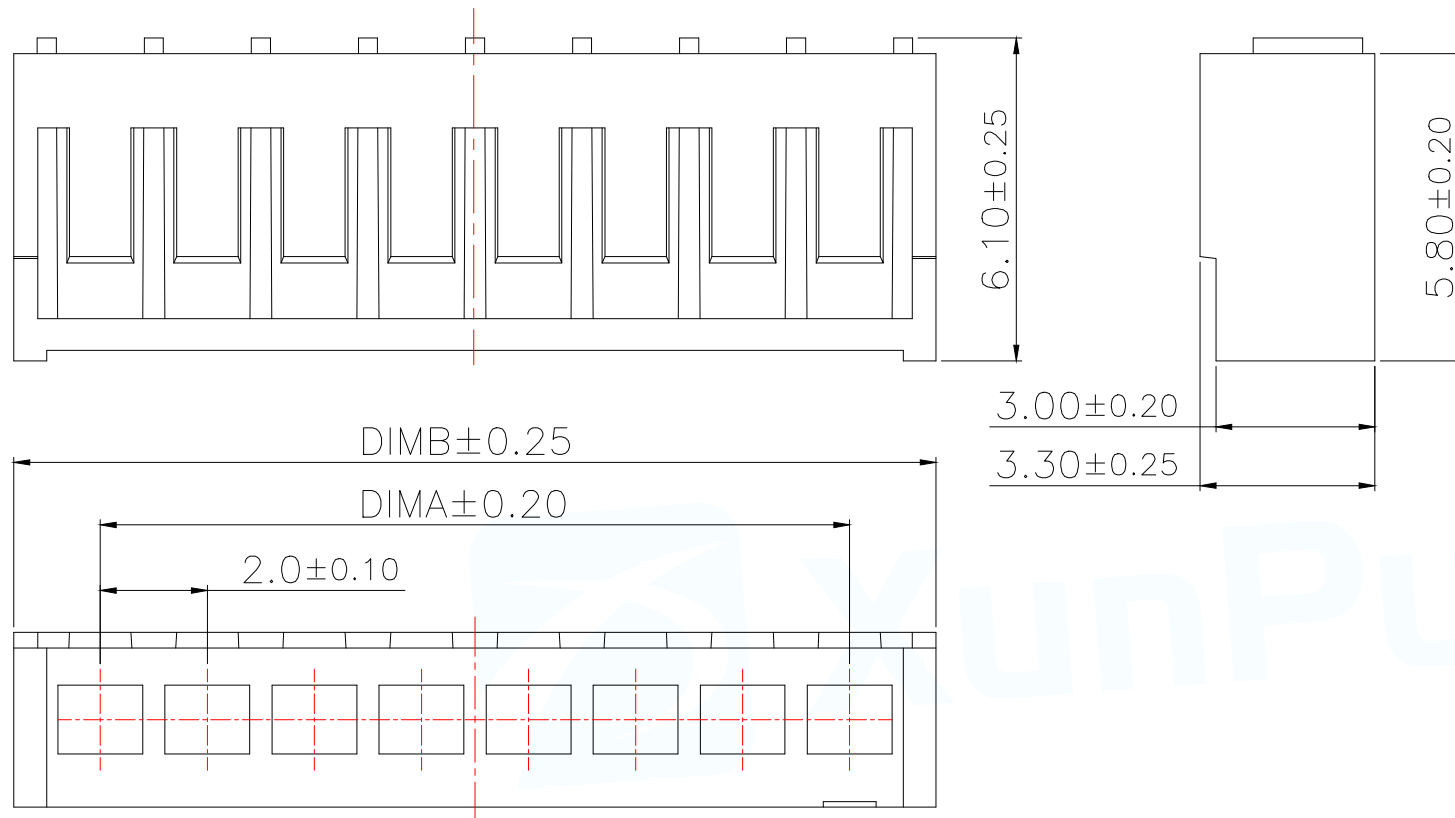


PART NO	PIN	A	B
WAFER-SAN2.0-2PJK	2	2.00	5.3
WAFER-SAN2.0-3PJK	3	4.00	7.3
WAFER-SAN2.0-4PJK	4	6.00	9.3
WAFER-SAN2.0-5PJK	5	8.00	11.3
WAFER-SAN2.0-6PJK	6	10.00	13.3
WAFER-SAN2.0-7PJK	7	12.00	15.3
WAFER-SAN2.0-8PJK	8	14.00	17.3
WAFER-SAN2.0-9PJK	9	16.00	19.3
WAFER-SAN2.0-10PJK	10	18.00	21.3
WAFER-SAN2.0-11PJK	11	20.00	23.3
WAFER-SAN2.0-12PJK	12	22.00	25.3
WAFER-SAN2.0-13PJK	13	24.00	27.3
WAFER-SAN2.0-14PJK	14	26.00	29.3
WAFER-SAN2.0-15PJK	15	28.00	31.3
WAFER-SAN2.0-16PJK	16	30.00	33.3
WAFER-SAN2.0-17PJK	17	32.00	35.3
WAFER-SAN2.0-18PJK	18	34.00	37.3
WAFER-SAN2.0-19PJK	19	36.00	39.3
WAFER-SAN2.0-20PJK	20	38.00	41.3

技术指标(Technical Index):

- 1.温度范围(Temperature range): $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
- 2.额定电压(Rated voltage):250V AC,DC.
- 3.耐电压(Withstanding Voltage):1000V AC/minute.
- 4.接触电阻(Contact resistance): $\leq 20\text{m}\Omega$.
- 5.绝缘电阻(Insulation resistance): $\geq 1000\text{M}\Omega$.
- 6.额定电流(Rated Current):2A AC,DC.

材料:

- 1.塑胶:PA66 白色

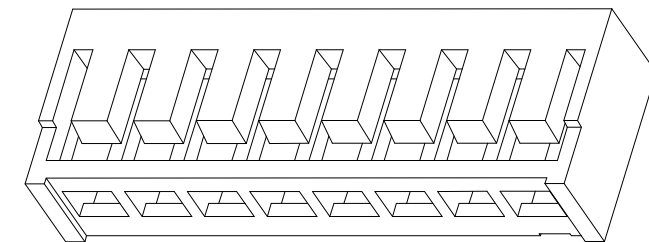

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: SAN2.0 WTB直插板款式	
			PAR	WAFER—SAN2.0—NPJK
DWN	Lucas			
CHKD	Ethan			
APVD	Jacob			
SCALE1:1	UNIT:MM			
X.:±0.50	±1°	CUSTOMER COPY		
X.X:±0.20		SIZE:A4	SHEET:1F1	REV:A
X.XX:±0.10				