
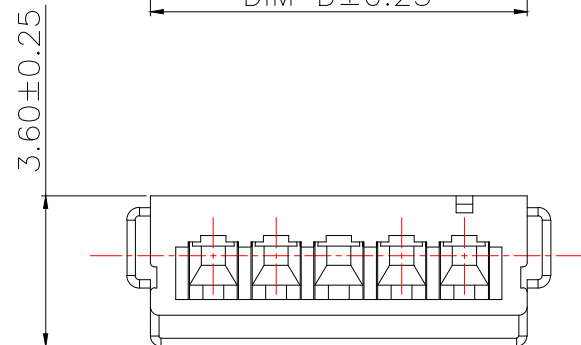
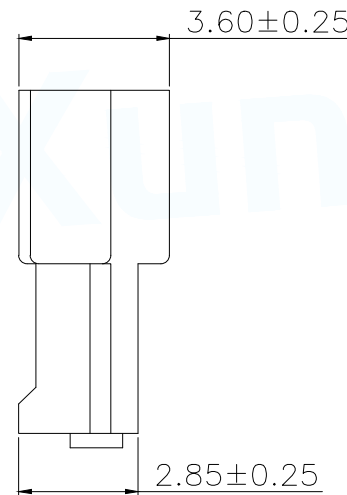
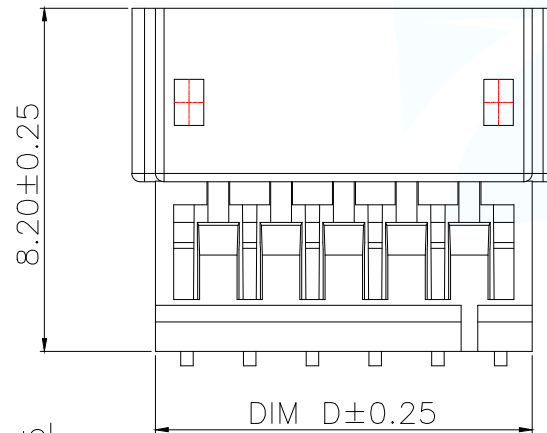
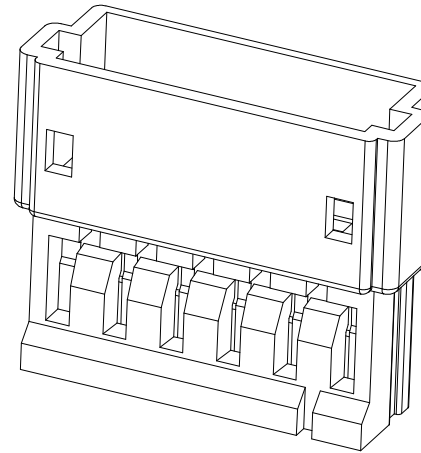


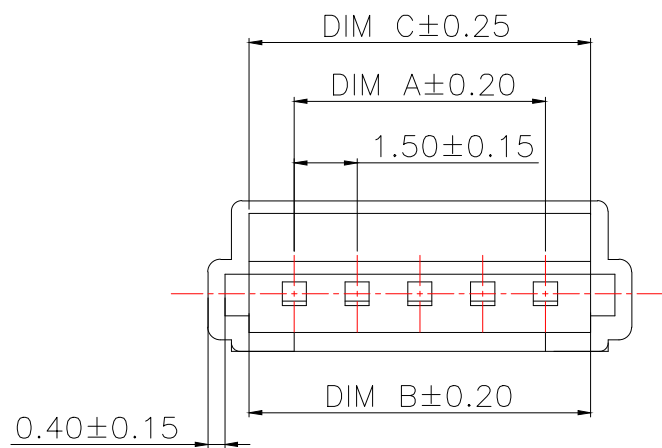

PART NO	PIN	A	B	C	D
WAFER-ZH1.5-2PJK-BMW	2	1.50	4.82	3.66	4.50
WAFER-ZH1.5-3PJK-BMW	3	3.00	6.32	5.16	6.00
WAFER-ZH1.5-4PJK-BMW	4	4.50	7.82	6.66	7.50
WAFER-ZH1.5-5PJK-BMW	5	6.00	7.90	8.16	9.00
WAFER-ZH1.5-6PJK-BMW	6	7.50	9.40	9.66	10.50
WAFER-ZH1.5-7PJK-BMW	7	9.00	10.90	11.16	12.00
WAFER-ZH1.5-8PJK-BMW	8	10.50	12.40	12.66	13.50
WAFER-ZH1.5-9PJK-BMW	9	12.00	13.90	14.16	15.00
WAFER-ZH1.5-10PJK-BMW	10	13.50	15.40	15.66	16.50
WAFER-ZH1.5-11PJK-BMW	11	15.00	16.90	17.16	18.00
WAFER-ZH1.5-12PJK-BMW	12	16.50	18.40	18.66	19.50
WAFER-ZH1.5-13PJK-BMW	13	18.00	19.90	20.16	21.00
WAFER-ZH1.5-14PJK-BMW	14	19.50	21.40	21.66	22.50
WAFER-ZH1.5-15PJK-BMW	15	21.00	22.90	23.16	24.00
WAFER-ZH1.5-16PJK-BMW	16	22.50	24.40	24.66	25.50

技术指标:

1. 温度范围: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
2. 额定电压: 100V AC, DC.
3. 耐电压: 500V AC/minute.
4. 接触电阻: $\leq 20\text{m}\Omega$.
5. 绝缘电阻: $\geq 500\text{M}\Omega$.
6. 额定电流: 1A AC, DC.

材料:

1. 塑胶: PA66 白色

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:	TITLE: ZH1.5 WTB 插座胶壳		
X.: ± 0.50	$\pm 1^{\circ}$	PAR	WAFER-ZH1.5-NPJK-BMW	
X.X: ± 0.20		DWN	Lucas	
X.XX: ± 0.10		CHKD	Ethan	
		APVD	Jacob	
		SCALE: 1:1	UNIT: MM	
		CUSTOMER COPY	SIZE: A4	SHEET: 1F1
				REV: A