Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
100V	13mΩ@10V	45A
	16mΩ@4.5V	

合肥矽普半导体
Siliup Semiconductor Technology Co.Ltd
技术 品质 服务
www.siliup.com

Feature

- Fast Switching
- Low Gate Charge and Rdson
- Advanced Split Gate Trench Technology
- 100% Single Pulse avalanche energy Test

Applications

- Power switching application
- Battery management
- Uninterruptible power supply

Package

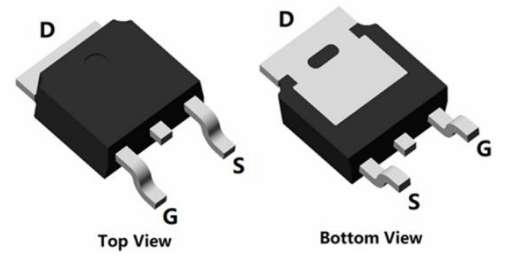

TO-252(1:G 2:D 3:S)

Circuit diagram



Marking



010N13G : **Product code**
****** : **Week code**

Order Information

Device	Package	Unit/Tube
SP010N13GTH	TO-252	2500

Absolute maximum ratings (Ta=25℃, unless otherwise noted)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	100	V
Gate-Source Voltage	V_{GS}	±20	V
Continuous Drain Current (Tc=25℃)	I_D	45	A
Continuous Drain Current (Tc=100℃)	I_D	30	A
Pulsed Drain Current	I_{DM}	180	A
Single Pulse Avalanche Energy[1]	E_{AS}	144	mJ
Power Dissipation (Tc=25℃)	P_D	75	W
Power Dissipation (Tc=100℃)	P_D	30	W
Thermal Resistance Junction-to-Case	$R_{\theta JC}$	1.67	℃/W
Storage Temperature Range	T_{STG}	-55 to 150	℃
Operating Junction Temperature Range	T_J	-55 to 150	℃

Electrical characteristics (Ta=25℃, unless otherwise noted)

Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	VGS=0V , ID=250uA	100	-	-	V
Drain Cut-Off Current	I_{DSS}	VDS=80V , VGS=0V , TJ=25℃	-	-	1	μA
Gate Leakage Current	I_{GSS}	VGS=±20V , VDS=0V	-	-	±100	nA
Gate Threshold Voltage	$V_{GS(th)}$	VGS=VDS , ID=250uA	1.5	1.9	2.5	V
Drain-Source ON Resistance	$R_{DS(ON)}$	VGS=10V , ID=20A	-	13	17	mΩ
		VGS=4.5V , ID=10A	-	16	21	
Gate Resistance	R_G	VDS=50V , VGS=0V , f=1MHz	-	2.2	-	Ω
Dynamic Characteristics						
Input Capacitance	C_{iss}	VDS=50V , VGS=0V , f=1MHz	-	1062	-	pF
Output Capacitance	C_{oss}		-	210	-	
Reverse Transfer Capacitance	C_{rss}		-	14	-	
Total Gate Charge	Q_g	VDS=50V , VGS=10V , ID=20A	-	17	-	nC
Gate-Source Charge	Q_{gs}		-	5.2	-	
Gate-Drain Charge	Q_{gd}		-	2.8	-	
Gate Plateau Voltage	$V_{plateau}$		-	3.6	-	V
Switching Characteristics						
Turn-On Delay Time	$t_{d(on)}$	VDD=50V, VGS=10V , RG=2.2Ω , ID=20A	-	33	-	nS
Rise Time	t_r		-	10.4	-	
Turn-Off Delay Time	$t_{d(off)}$		-	44	-	
Fall Time	t_f		-	14.7	-	
Drain-Source Body Diode Characteristics						
Source-Drain Diode Forward Voltage	V_{SD}	IS=1A , VGS=0V , TJ=25℃	-	-	1.2	V
Maximum Body-Diode Continuous Current	I_S		-	-	45	A
Reverse Recovery Time	Trr	IS=20A , di/dt=100A/us , TJ=25℃	-	40	-	nS
Reverse Recovery Charge	Qrr		-	42	-	nC

Note:

1. The EAS test condition is VDD=50V, VGS=10V, L=0.5mH, RG=25Ω

Typical Characteristics

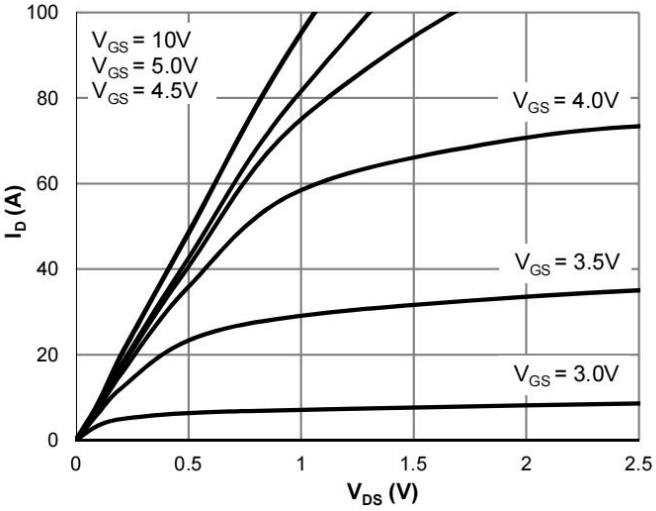

Typical Output Characteristics

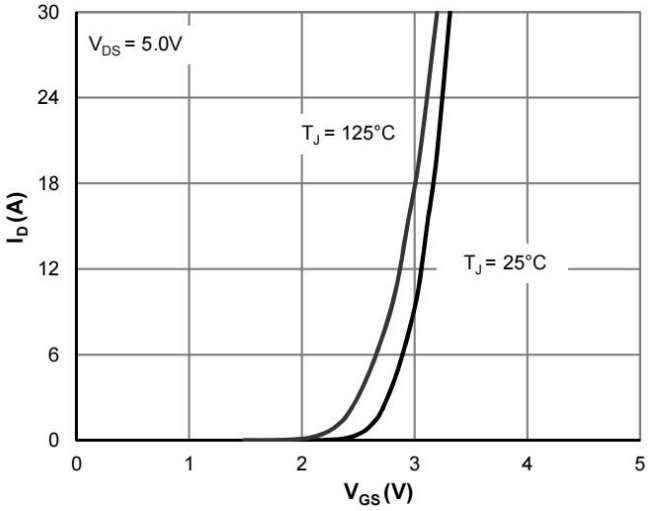

Transfer Characteristics

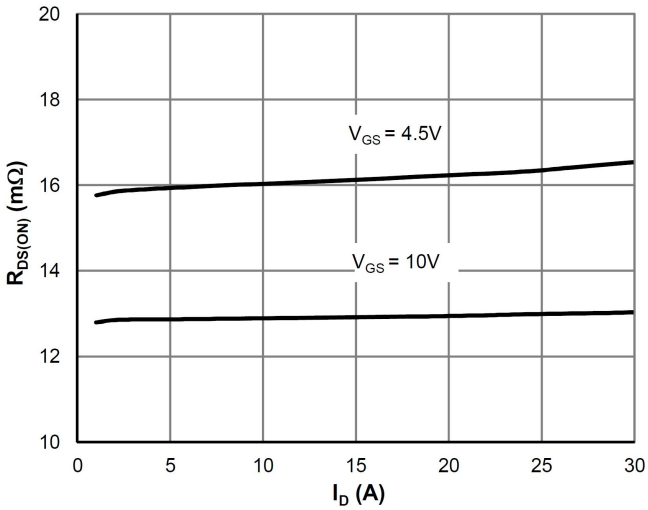

On-Resistance vs.Drain Current

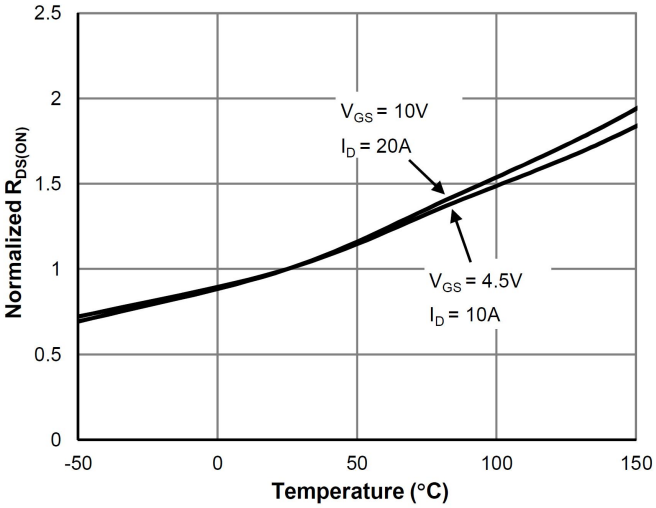

On-Resistance vs.Junction Temperature

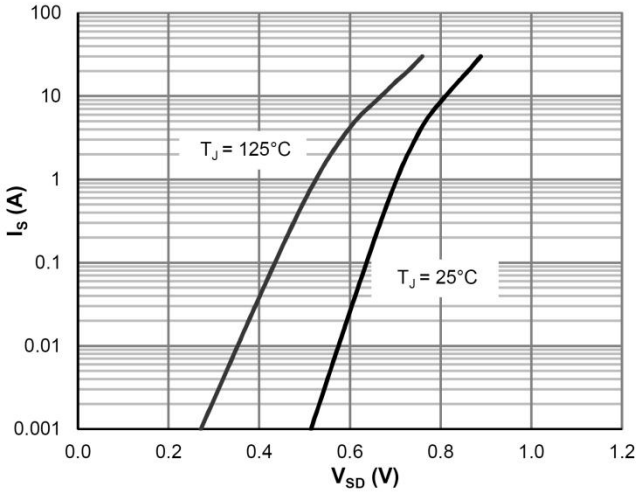

Body-Diode Characteristics

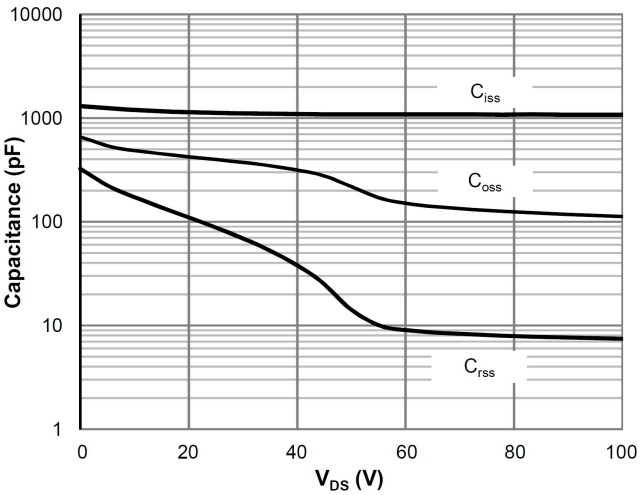

Capacitance Characteristics

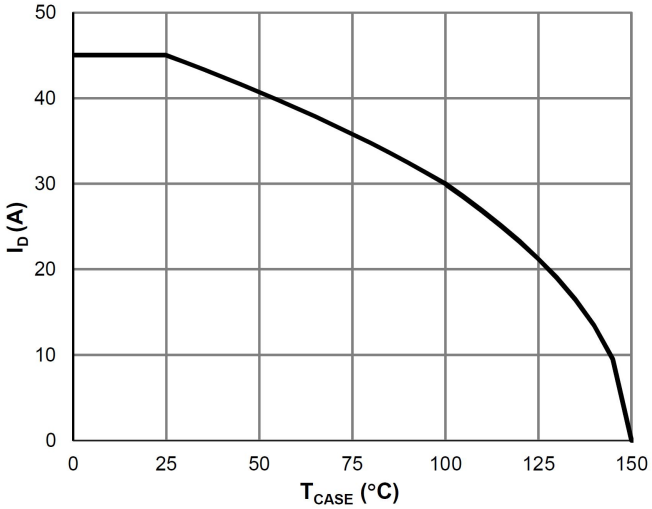

Current De-rating

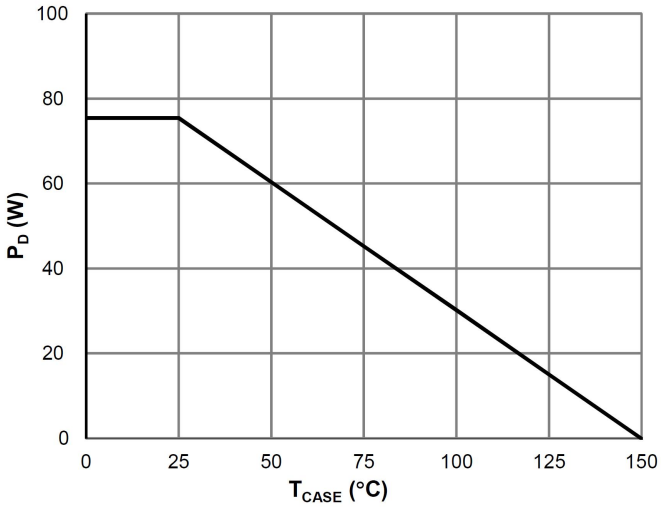

Power De-rating

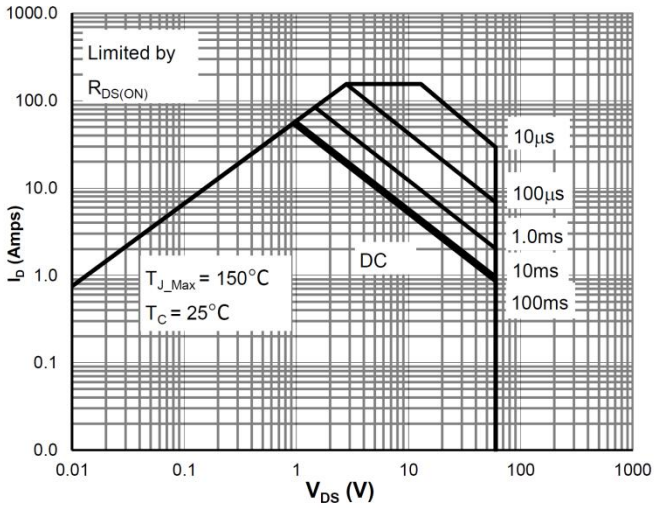

Maximum Safe Operating Area

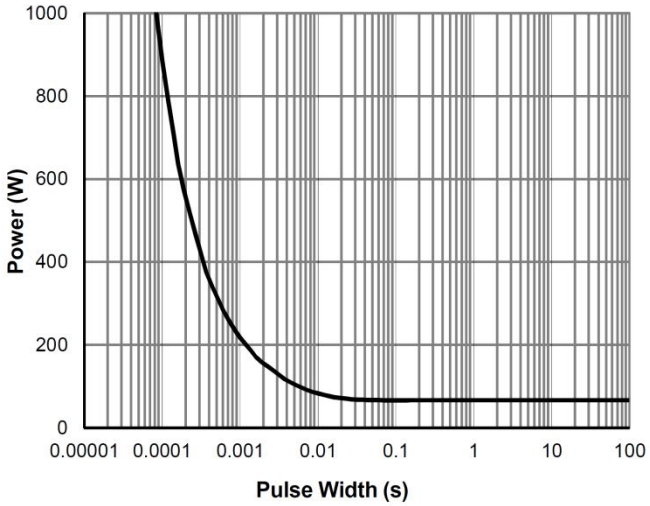

Single Pulse Power Rating,Junction-to-Case

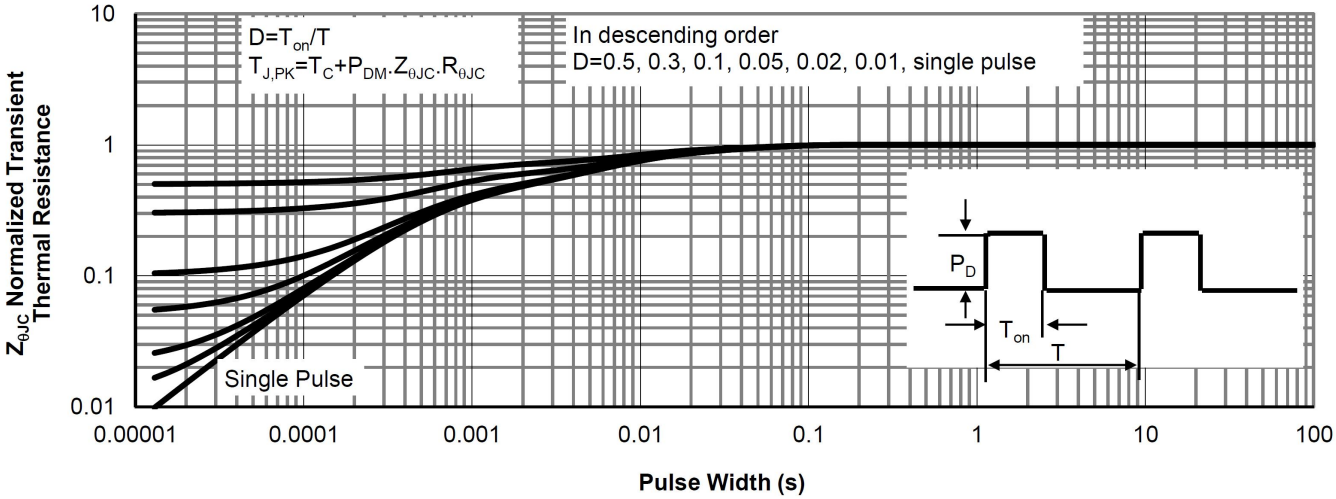

Normalized Maximum Transient Thermal Impedance

Test Circuit

Gate Charge

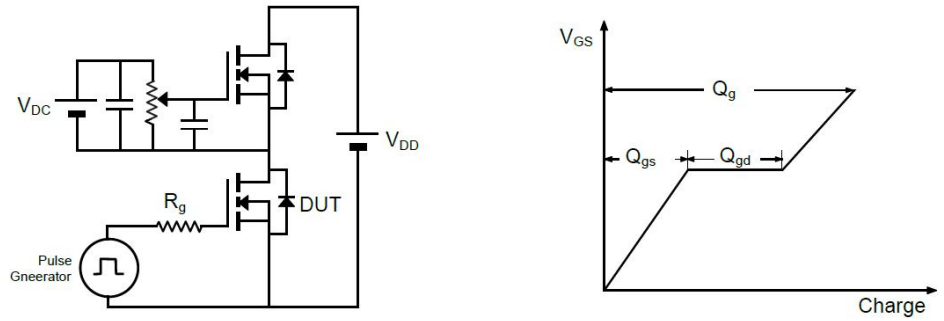

Resistive Load Switching Time

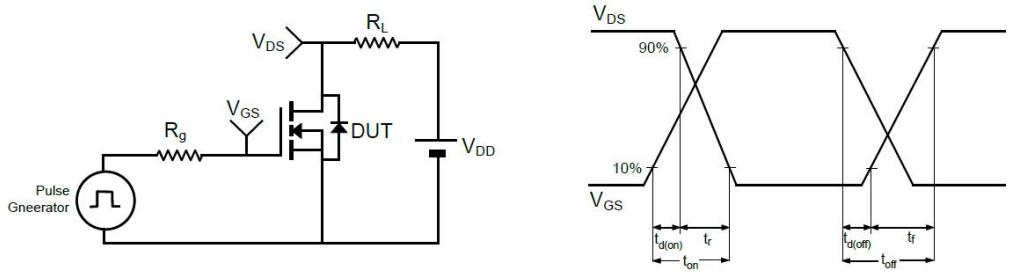

Un-clamped Inductive Load Switching

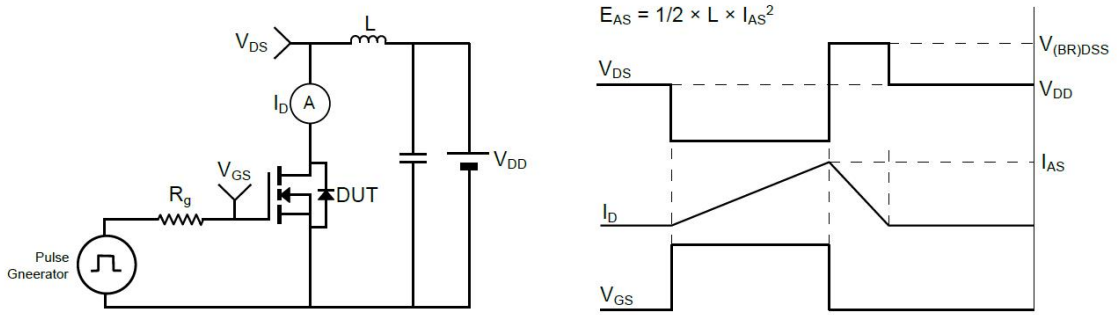

Drain-Source Body Diode Reverse Recovery

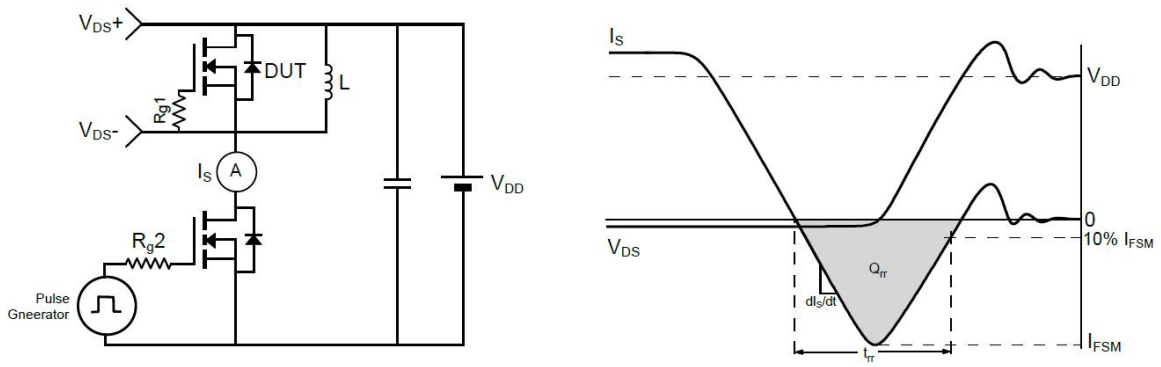

Temperature Profile for IR Reflow Soldering

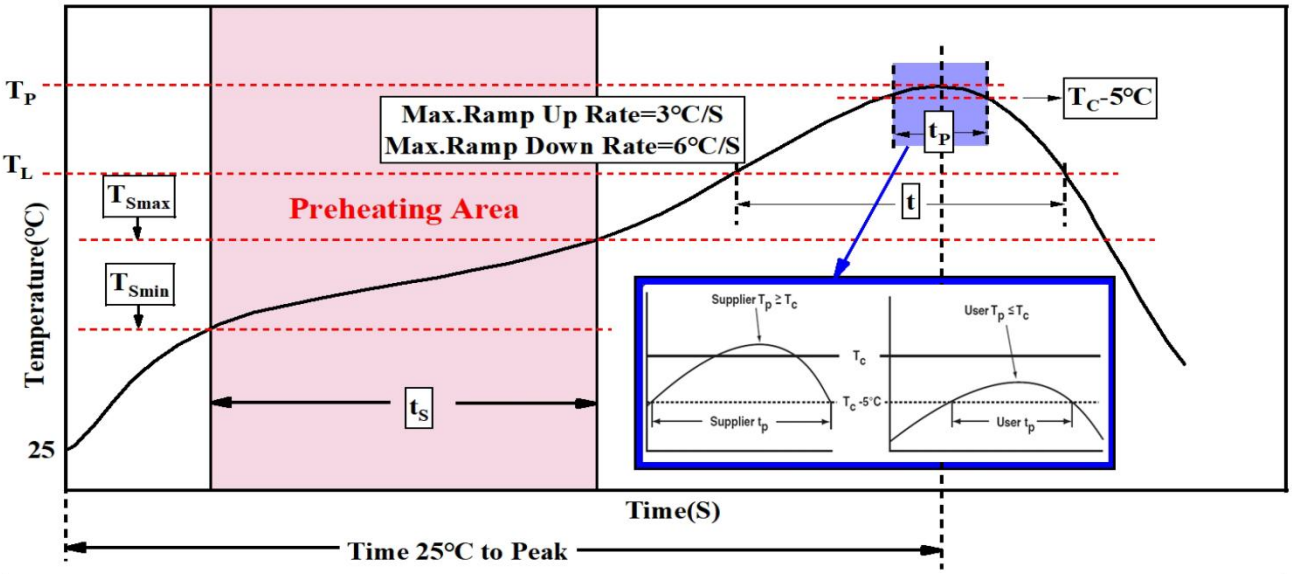

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat & Soak Temperature min (Tsmin) Temperature max (Tsmax) Time (Tsmin to Tsmax) (ts)	 100°C 150°C 60-120 seconds	 150°C 200°C 60-120 seconds
Average ramp-up rate (Tsmax to Tp)	3 °C/second max.	3°C/second max.
Liquidous temperature (TL) Time at liquidous (tL)	183 °C 60-150 seconds	217°C 60-150 seconds
Peak package body Temperature e (Tp)*	See Classification Temp in table 1	See Classification Temp in table 2
Time (tp)** within 5°C of the specified classification temperature (Tc)	20** seconds	30** seconds
Average ramp-down rate (Tp to Tsmax)	6 °C/second max.	6 °C/second max.
Time 25°C to peak temperature	6 minutes max.	8 minutes max.
* Tolerance for peak profile Temperature (Tp) is defined as a supplier minimum and a user maximum. ** Tolerance for time at peak profile temperature (tp) is defined as a supplier minimum and a user maximum		

Table 1. SnPb Eutectic Process – Classification Temperatures (Tc)

Package Thickness	Volume mm^3 <350	Volume mm^3 ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2. Pb-free Process – Classification Temperatures (Tc)

Package Thickness	Volume mm^3 <350	Volume mm^3 350-2000	Volume mm^3 >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 mm – 2.5 mm	260 °C	250 °C	245 °C
≥2.5 mm	250 °C	245 °C	245 °C

TO-252 Embossed Carrier Tape

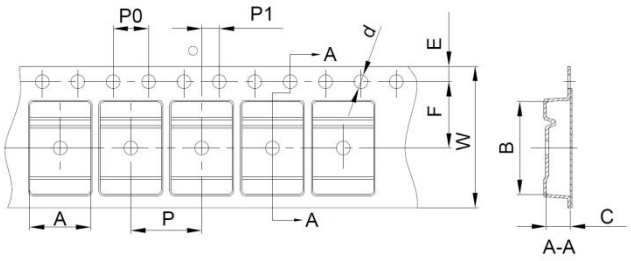

Packaging Description:

TO-252 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Hear Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 2500 units per 13″ or 33.0 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
TO-252	6.90	10.50	2.70	Φ1.55	1.75	7.50	4.00	8.00	2.00	16.00

TO-252 Tape Leader and Trailer

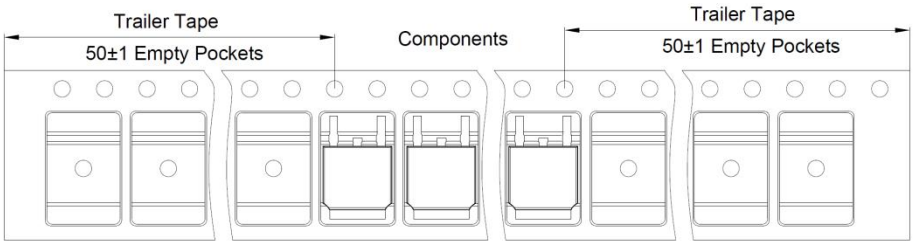

TO-252 Reel

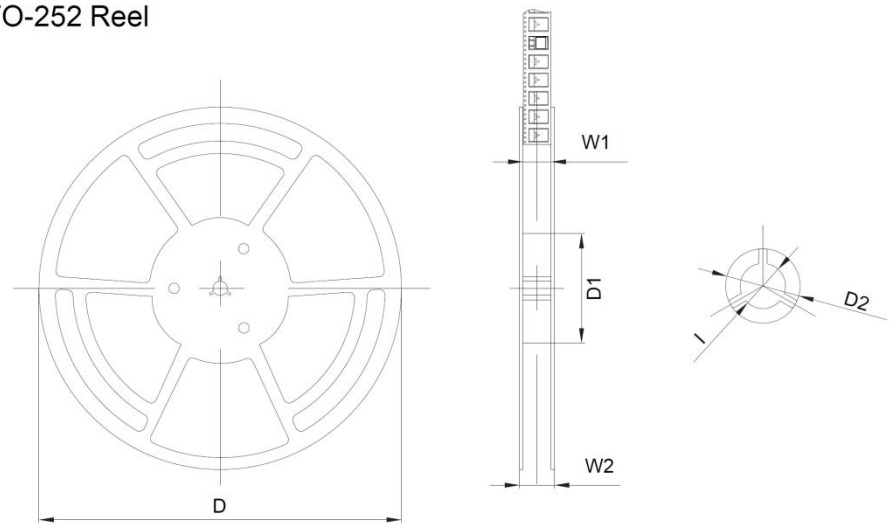

Dimensions are in millimeter						
Reel	D	D1	D2	W1	W2	I
13" Dia	330.00	100.00	Φ21.00	16.40	21.40	Φ13.00

Reel	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)
2500 pcs	13 inch	5000 pcs	360×360×65	25000 pcs	378×358×382

TO-252 Package Information

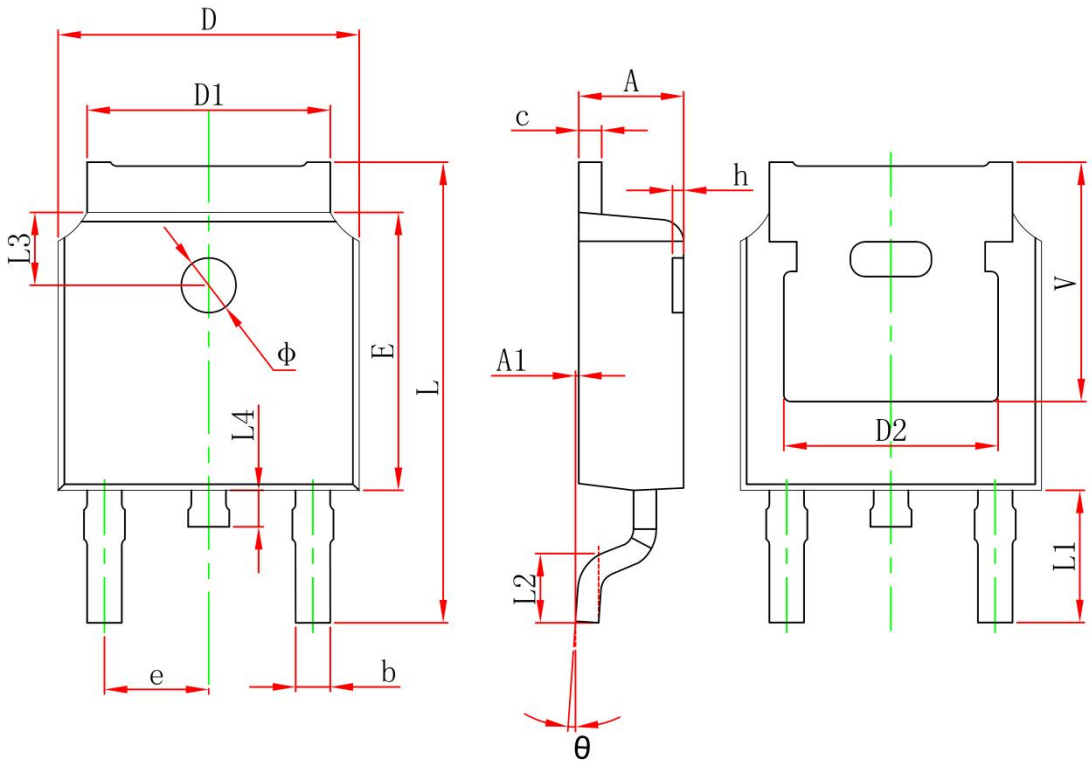

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.660	0.860	0.026	0.034
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.800	10.400	0.386	0.409
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.350 REF.		0.211 REF.	