

SPTECH Silicon PNP Darlington Power Transistor

DESCRIPTION

- Built-in Base-Emitter Shunt Resistors
- High DC current gain-
 $h_{FE} = 750$ (Min) @ $I_C = -10$ Adc
- Collector-Emitter Sustaining Voltage-
 $V_{CEO(SUS)} = -100V$ (Min)
- Complement to type 2N6284

APPLICATIONS



- Intended for general purpose amplifier and low frequency switching applications, such as linear and switching industrial equipment.

ABSOLUTE MAXIMUM RATINGS($T_C=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-100	V
V_{CEO}	Collector-Emitter Voltage	-100	V
V_{EBO}	Emitter-Base Voltage	-5.0	V
I_C	Collector Current -Continuous	-20	A
I_{CP}	Collector Current-Peak	-40	A
I_B	Base Current	-0.5	A
P_C	Collector Power Dissipation@ $T_C=25^\circ\text{C}$	160	W
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-65~150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	ThermalResistance, Junction to Case	1.09	$^\circ\text{C/W}$

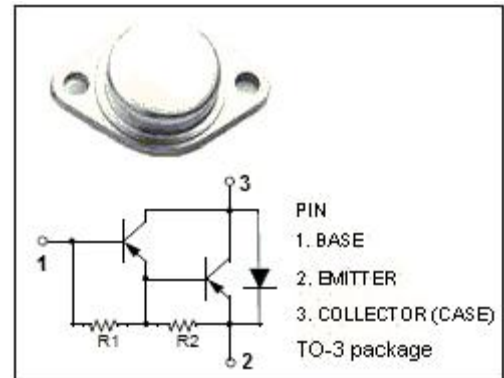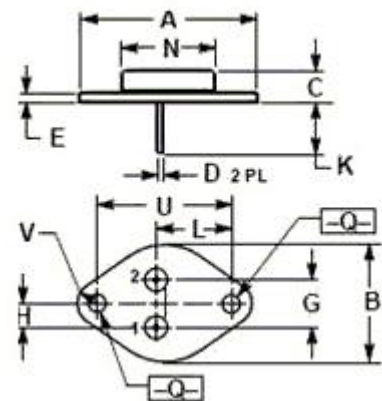

DIM	mm	
	MIN	MAX
A		39.00
B	25.20	26.67
C	8.30	8.90
D	1.20	1.70
E	1.50	1.70
G		11.00
H		5.50
K	10.50	13.50
L	16.75	17.05
N	19.40	19.62
Q	4.00	4.20
U	29.00	31.00
V	4.00	4.20

SPTECH Silicon PNP Darlington Power Transistor

ELECTRICAL CHARACTERISTICS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{CE0(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C = -50\text{mA}$; $I_B = 0$	-100		V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C = -10\text{A}$; $I_B = -40\text{mA}$		-2.0	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C = -20\text{A}$; $I_B = -200\text{mA}$		-3.0	V
$V_{BE(sat)}$	Base-Emitter Saturation voltage	$I_C = -20\text{A}$; $I_B = -200\text{mA}$		-4.0	V
$V_{BE(on)}$	Base-Emitter On voltage	$I_C = -10\text{A}$; $V_{CE} = -3\text{V}$		-2.8	V
I_{CEO}	Collector Cutoff current	$V_{CE} = -50\text{V}$; $I_B = 0$		-1.0	mA
I_{CEX}	Collector Cutoff current	$V_{CE} = -100\text{V}$; $V_{BE(off)} = -1.5\text{V}$ $V_{CE} = -100\text{V}$; $V_{BE(off)} = -1.5\text{V}$, $T_C = 150^{\circ}\text{C}$		-0.5 -5.0	mA
I_{EBO}	Emitter Cut-off current	$V_{EB} = -5\text{V}$; $I_C = 0$		-2.0	mA
h_{FE-1}	DC Current Gain	$I_C = -10\text{A}$; $V_{CE} = -3\text{V}$	750	18000	
h_{FE-2}	DC Current Gain	$I_C = -20\text{A}$; $V_{CE} = -3\text{V}$	100		
C_{OB}	Output Capacitance	$I_E = 0$; $V_{CB} = -10\text{V}$; $f_{test} = 1.0\text{MHz}$		600	pF