Operation:SMT& Hinge SIM CARD SOCKETS 铰链型MINI-SIM卡座

RoHS Compliant



LTEM NO.:SIM-007-P6 (Consumer Electronics)

(30.00L×17.45W×2.5H & MINI-SIM Sockets)

MEMORY-CARD-SOCKETS

Technical parameter

PROJECT \ LEVEL		A[better product]	B[average product]
Electrical Properties	Contact Rating	25mA, 24V DC	
	Initial Contact Resistance	30mΩ max.	50mΩ max.
	Insulation Resistance	100MΩ min.500V DC	
	Withstand Voltage	500V AC for 1 minute	350 V AC for 1 minut
Durable Performance	There No Load	5,000 Cycles	3,500 Cycles
	Rated Load	3,500 Cycles	3,000 Cycles
Sterage temp.		-25℃～+85℃(Operating Temp:)	

外焊贴装 SMT

侧向導入 LATERAL

精密部品 NICETY

可靠 STABILIZE

適合環保 RoHS

Page1

Unit:mm

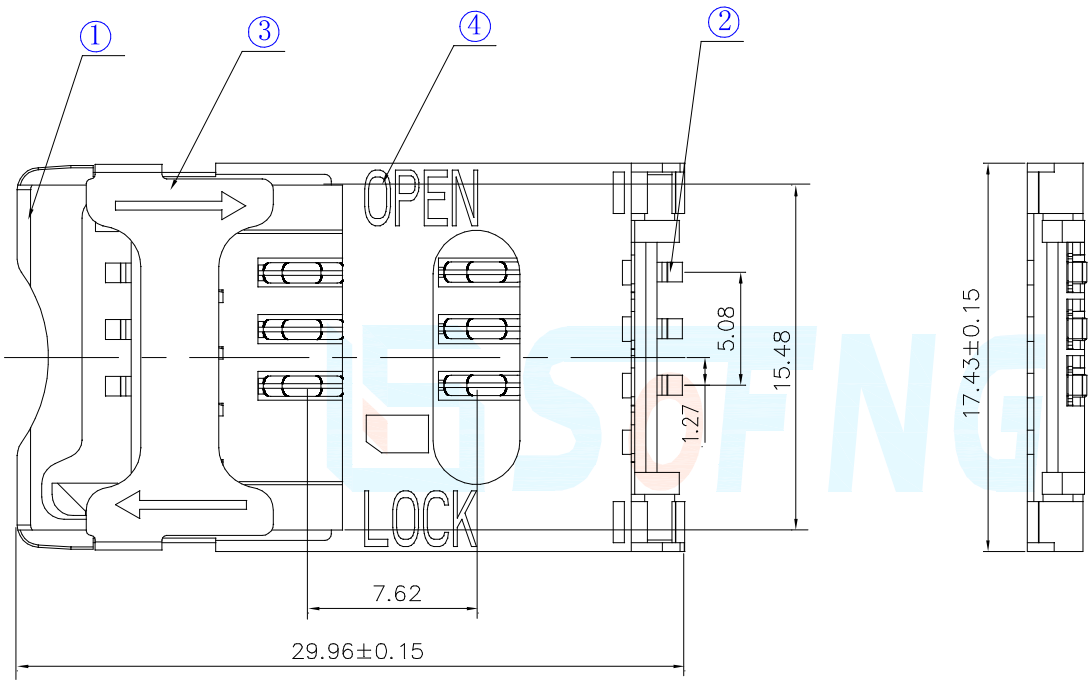

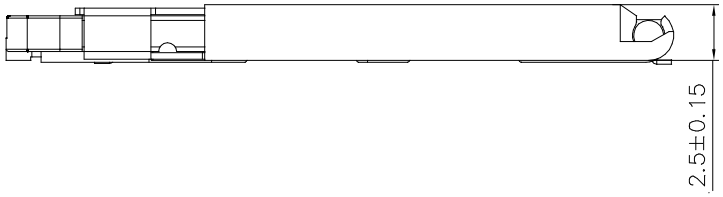

NAME		MATERIAL
①	SHELL	PA9T+PA6T[6T 耐手焊]
②	CONTACT	C5191-H 磷青铜 COPPER ALLOY[Gold Flash-6PIN]
③	COVER	SUS301-3/4H(t=0.20mm)不锈钢【焊点镀金 1u〞】
④	HOUSING	PC:BLACK

CIRCUIT BOARD SIZE
(Vertical view)

Operating Force		Solder-ability (Max.)
	Inward	5.0～6.5N. (1N.=100gram-force)
	Exiting	5.0～6.5N. (1N.=100gram-force)

IR Reflow: 255℃, 5sec. Manual: 350℃, 3sec.

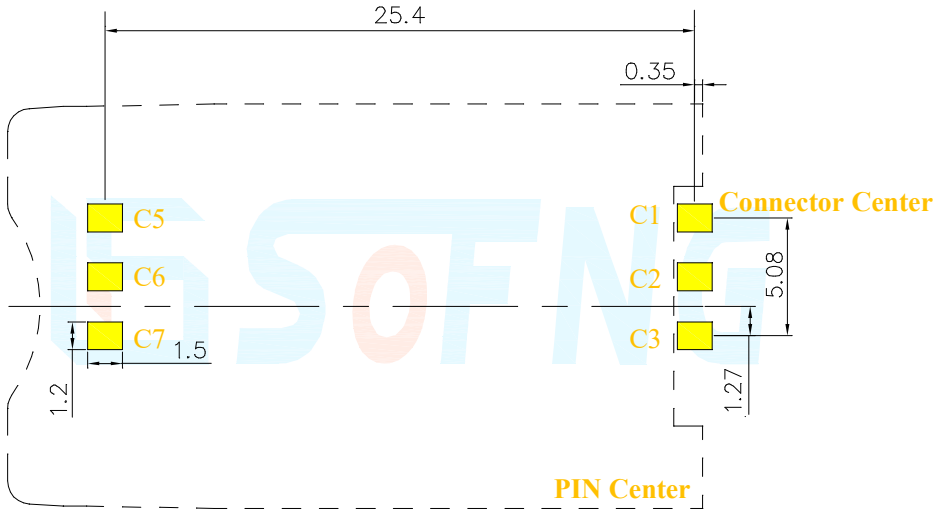

DECIMALS	ANGLES
X :±0.50	X° :±3°
X.X :±0.35	X.X° :±1°
X.XX :±0.25	X.XX° :±0.5°

Pin definition

T-Flash CARD			
Pin No.	Pin NAME	Type	Description
C ①	卡電源	1	VCC
C ②	復位	1	RST
C ③	時鐘	1	CLK
C ⑤	接地	1	GND
C ⑥	Vpp	1	VPP
C ⑦	輸入/輸出	1	I/O

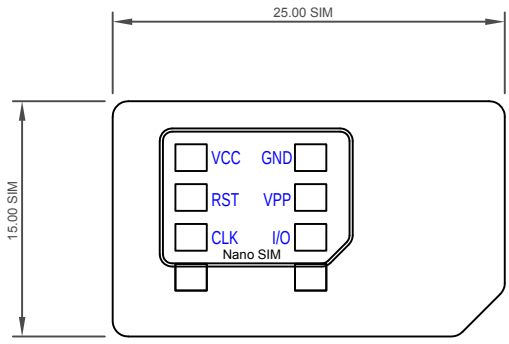

Reference MINI-SIM

邀您使用(微信)小程序
硕方电子开关&连接器选型手册
手机扫码即可进入...

本品不屬於危害性廢棄物,須丟棄時可以委託回收商予以回收再生處理。Products do not belong to hazardous waste,When waste can recycling processing

運送時本產品不要直接與水、酸鹼性化學物質接觸,或放置於含有以上氣體環境中,並且需要注意會有滑落、側翻的危險發生;運輸過程中不能有碰撞或者擠壓,須保證溫度與濕度適中[常溫 25℃,濕度在 50℃以內],不可導致材料變形或氧化。

注記 NOTICE

1. 碩方公司擁有最終解釋權; *The SOFNG company reserves the right of final interpretation;*
2. 文件禁止外洩、轉載; *Leaked and reproduced prohibited;*
3. 未經授權修改無效。*Modify is invalid.*