

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-2Y-750

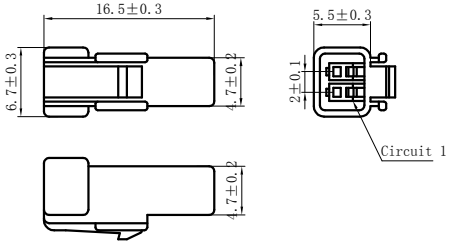


DL20023-3Y-750

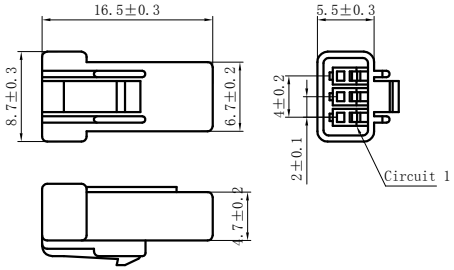


DL20023-8Y-750

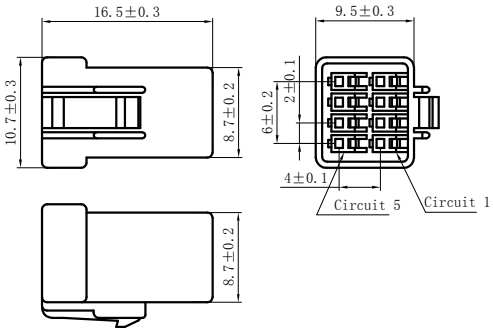

DL20023-4Y-750

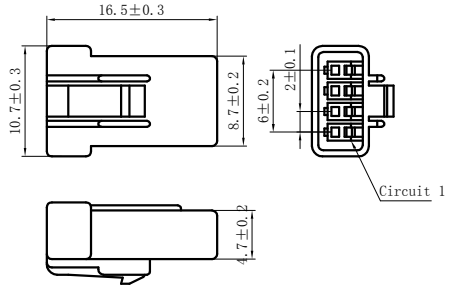

DL20023-6Y-750

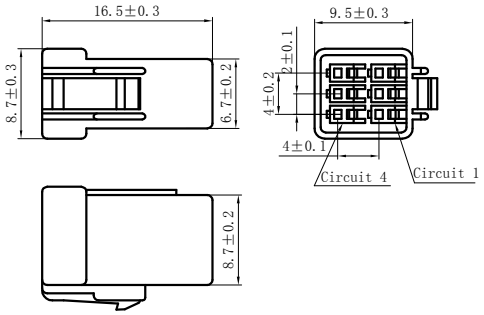


NOTES:
1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. lnsulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° ± 3.0°	PRODUCT NAME: DL20023-Y-750		TITLE: 2.0 mm Pitch Housing	
.XX: ± 0.15	.X° ± 2.0°				
.XXX: ± 0.01	.X° ± 1.0°	DR:Chen Quan Long	DATE:21/08/01	PART NO:	
FINISH:		CHKD:Wu Hui	DATE:21/08/01	SCALE: N/A	PAGE:1/2
DRAWING NO:		APPD:Ren An De	DATE:21/08/01	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-10Y-750

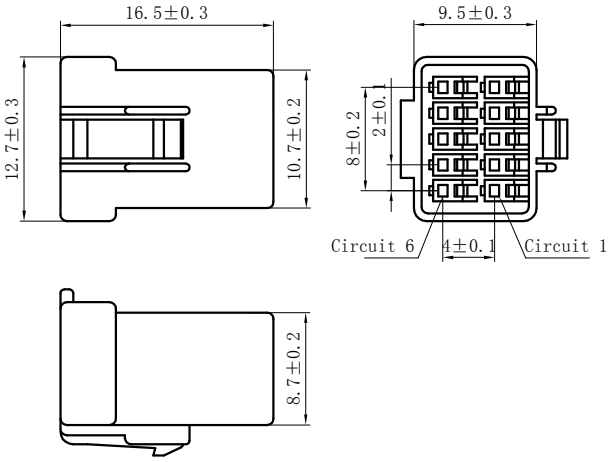


DL20023-12Y-750

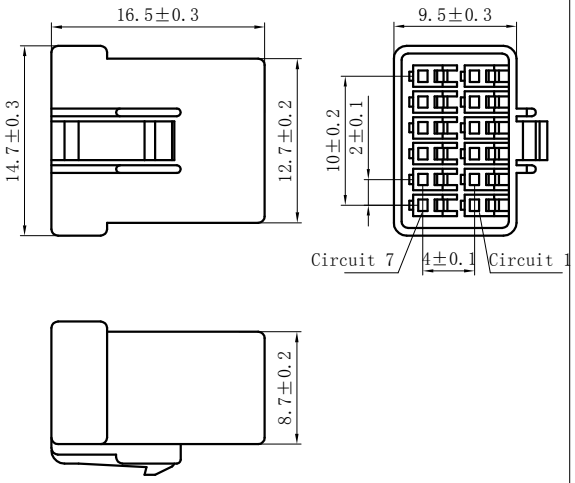

DL20023-14Y-750

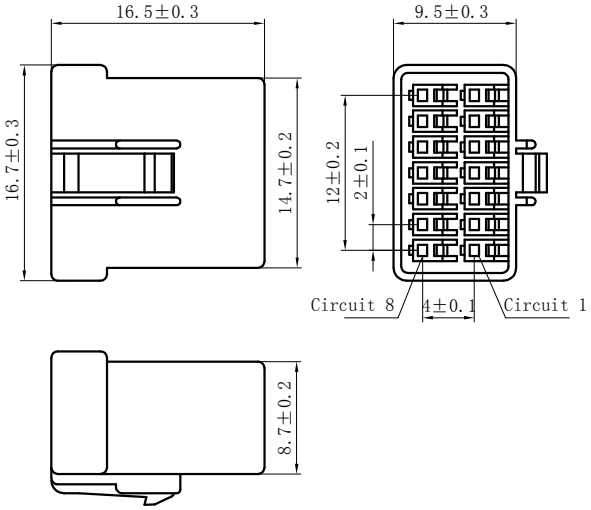

DL20023-16Y-750

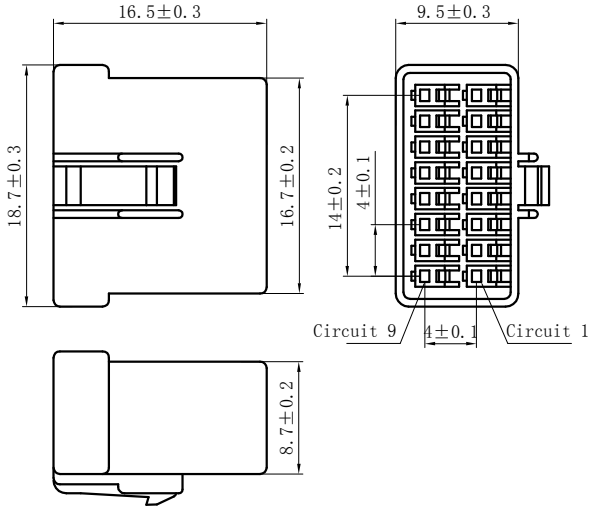


NOTES:

1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. lnsulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° ± 3.0°	PRODUCT NAME: DL20023-Y-750		TITLE: 2.0 mm Pitch Housing	
.XX: ± 0.15	.X° ± 2.0°				
.XXX: ± 0.01	.X° ± 1.0°	DR:Chen Quan Long	DATE:21/08/01	PART NO:	
FINISH:		CHKD:Wu Hui	DATE:21/08/01	SCALE: N/A	PAGE:2/2
DRAWING NO:		APPD:Ren An De	DATE:21/08/01	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-2Y-750-BL

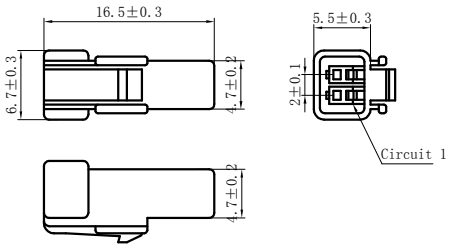


DL20023-3Y-750-BL

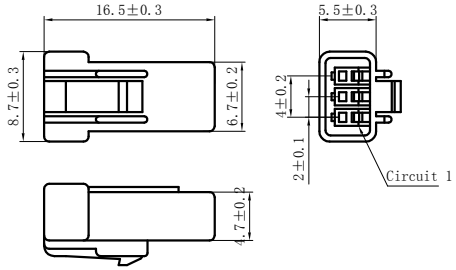


DL20023-8Y-750-BL

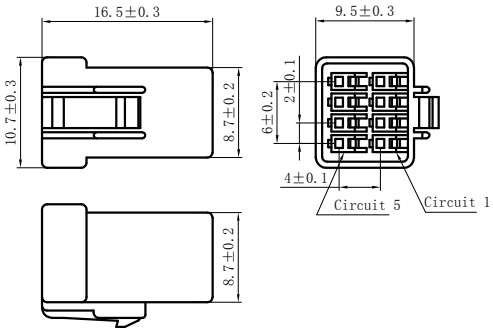

DL20023-4Y-750-BL

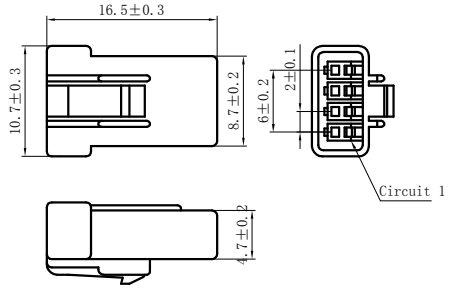

DL20023-6Y-750-BL

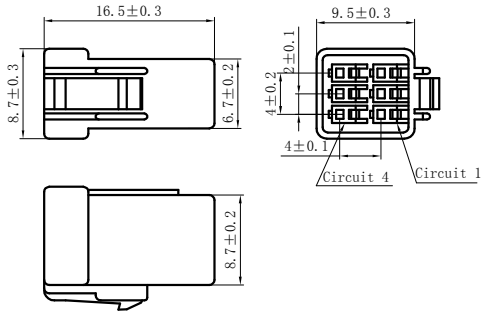


NOTES:
1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. lnsulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria
9. Color: Blue


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° ± 3.0°	PRODUCT NAME: DL20023-Y-750-BL		TITLE: 2.0 mm Pitch Housing	
.XX: ± 0.15	.X° ± 2.0°				
.XXX: ± 0.01	.X° ± 1.0°	DR:Chen Quan Long	DATE:21/08/01	PART NO:	
FINISH:		CHKD:Wu Hui	DATE:21/08/01	SCALE: N/A	PAGE:1/2
DRAWING NO:		APPD:Ren An De	DATE:21/08/01	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-10Y-750-BL

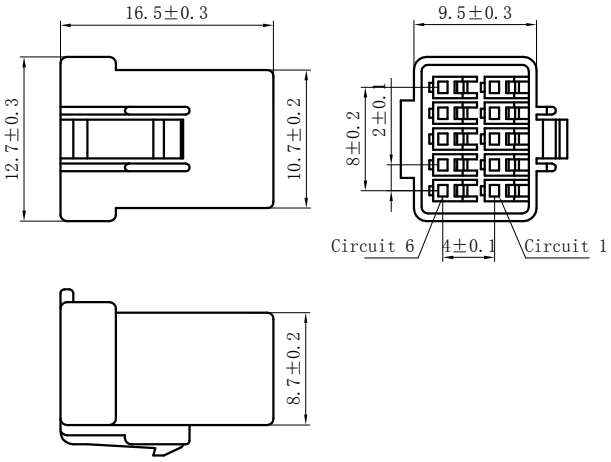


DL20023-12Y-750-BL

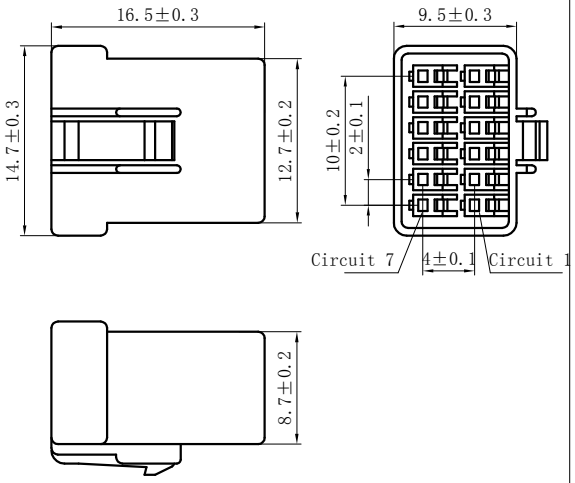

DL20023-14Y-750-BL

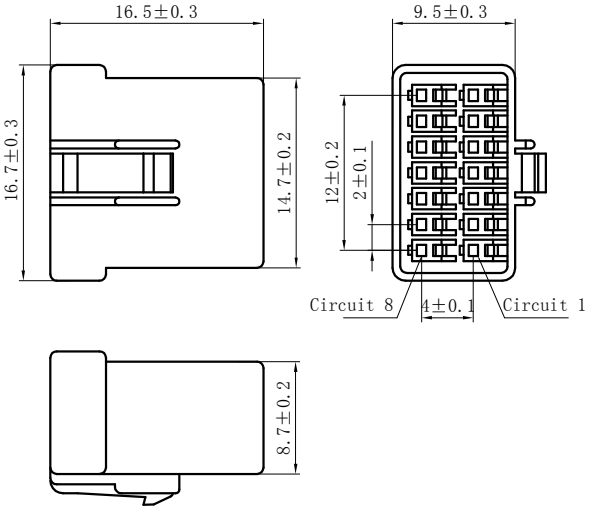

DL20023-16Y-750-BL

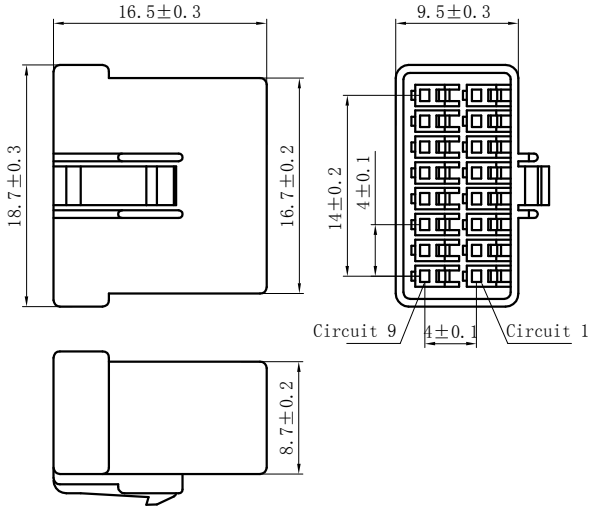


NOTES:

1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ⩽15 mΩ
4. lnsulation resistance: ⩾1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria
9. Color: Blue


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° ± 3.0°	PRODUCT NAME: DL20023-Y-750-BL		TITLE: 2.0 mm Pitch Housing	
.XX: ± 0.15	.X° ± 2.0°				
.XXX: ± 0.01	.X° ± 1.0°	DR:Chen Quan Long	DATE:21/08/01	PART NO:	
FINISH:		CHKD:Wu Hui	DATE:21/08/01	SCALE: N/A	PAGE:2/2
DRAWING NO:		APPD:Ren An De	DATE:21/08/01	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-2Y-750-BK

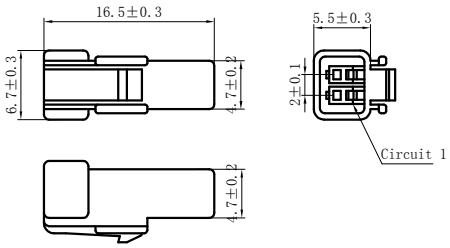


DL20023-3Y-750-BK

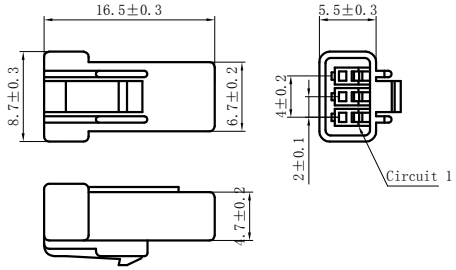


DL20023-8Y-750-BK

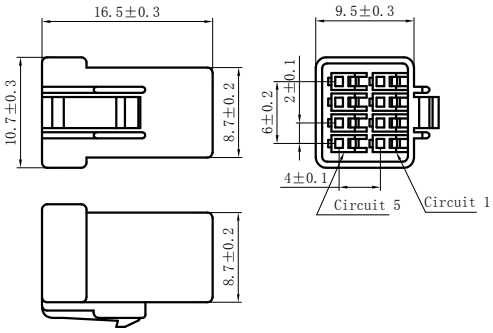

DL20023-4Y-750-BK

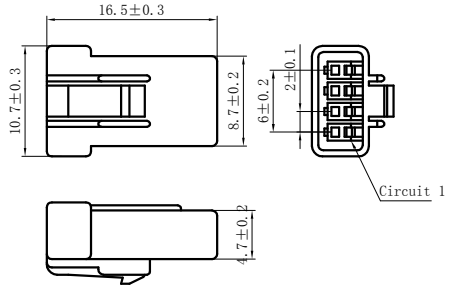

DL20023-6Y-750-BK

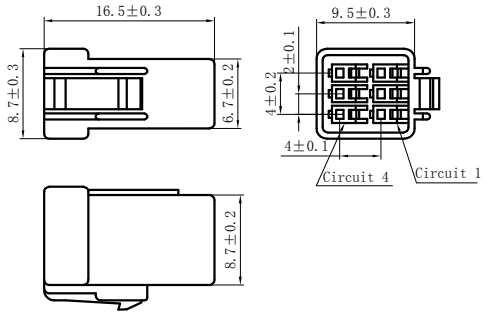


NOTES:
1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. lnsulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria
9. Color: Black


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° ± 3.0°	PRODUCT NAME: DL20023-Y-750-BK		TITLE: 2.0 mm Pitch Housing	
.XX: ± 0.15	.X° ± 2.0°				
.XXX: ± 0.01	.X° ± 1.0°	DR:Chen Quan Long	DATE:21/08/01	PART NO:	
FINISH:		CHKD:Wu Hui	DATE:21/08/01	SCALE: N/A	PAGE:1/2
DRAWING NO:		APPD:Ren An De	DATE:21/08/01	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-10Y-750-BK

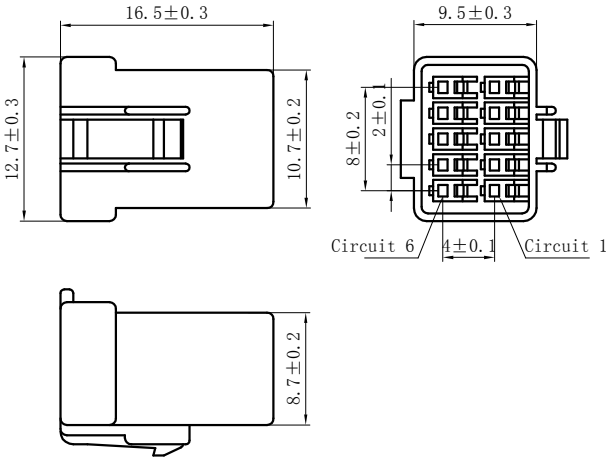


DL20023-12Y-750-BK

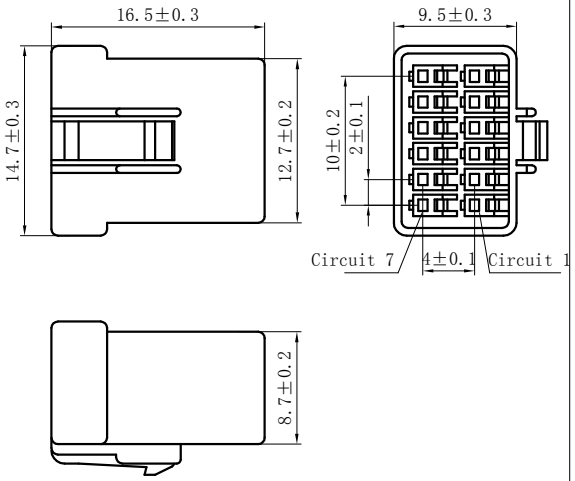

DL20023-14Y-750-BK

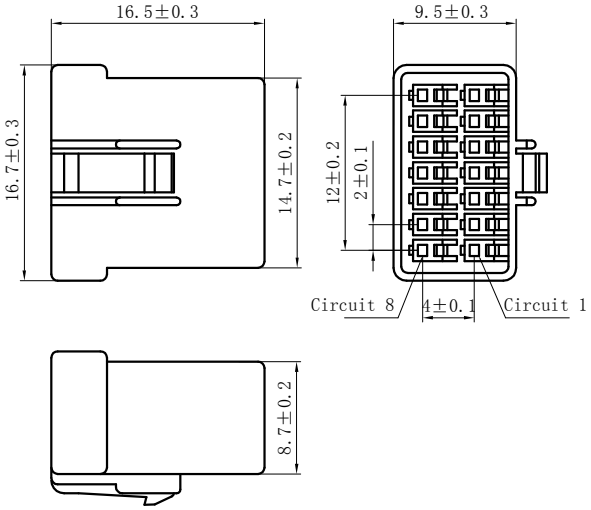

DL20023-16Y-750-BK

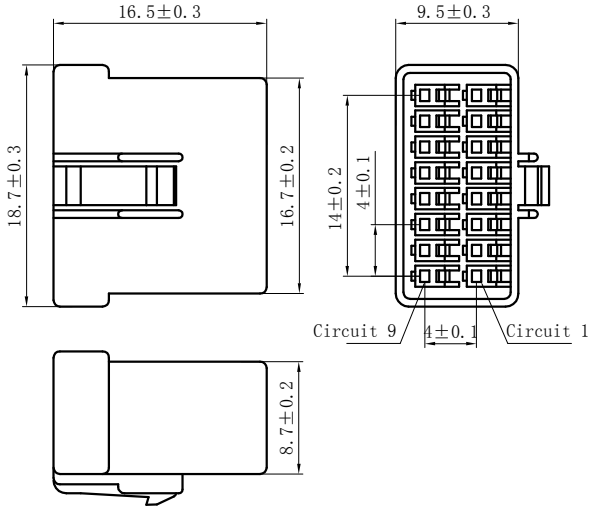


NOTES:

1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. Insulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria
9. Color: Black


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD		
.X: ± 0.30	X° ± 3.0°	PRODUCT NAME: DL20023-Y-750-BK		TITLE: 2.0 mm Pitch Housing
.XX: ± 0.15	.X° ± 2.0°			
.XXX: ± 0.01	.X° ± 1.0°	DR:Chen Quan Long	DATE:21/08/01	PART NO:
FINISH:		CHKD:Wu Hui	DATE:21/08/01	SCALE: N/A / PAGE:2/2
DRAWING NO:		APPD:Ren An De	DATE:21/08/01	UNITS: mm / REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-2Y-750-RE

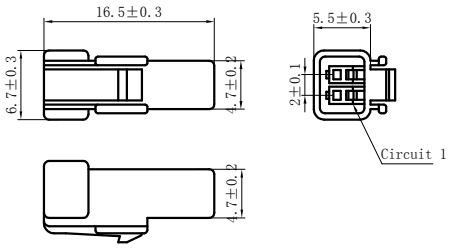


DL20023-3Y-750-RE

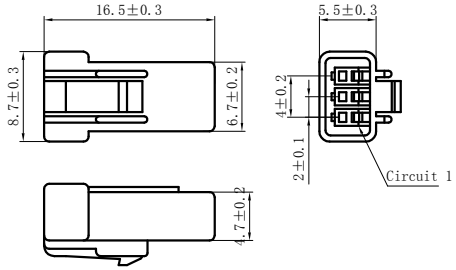


DL20023-8Y-750-RE

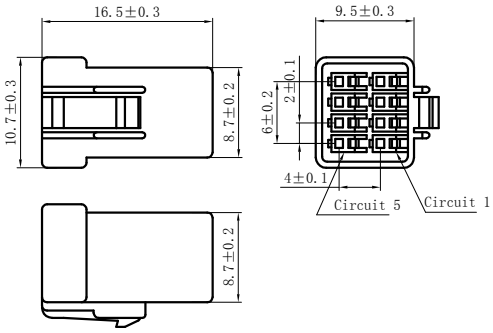

DL20023-4Y-750-RE

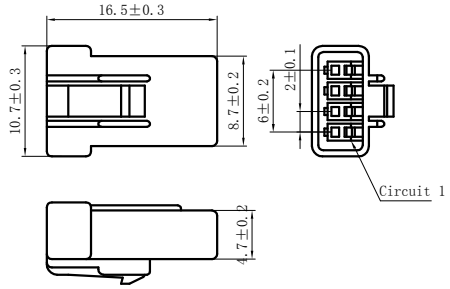

DL20023-6Y-750-RE

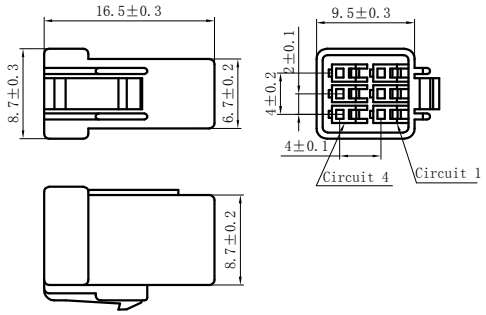


NOTES:
1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. lnsulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria
9. Color: Red


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° ± 3.0°	PRODUCT NAME: DL20023-Y-750-RE		TITLE: 2.0 mm Pitch Housing	
.XX: ± 0.15	.X° ± 2.0°				
.XXX: ± 0.01	.X° ± 1.0°	DR:Chen Quan Long	DATE:21/08/01	PART NO:	
FINISH:		CHKD:Wu Hui	DATE:21/08/01	SCALE: N/A	PAGE:1/2
DRAWING NO:		APPD:Ren An De	DATE:21/08/01	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-10Y-750-RE

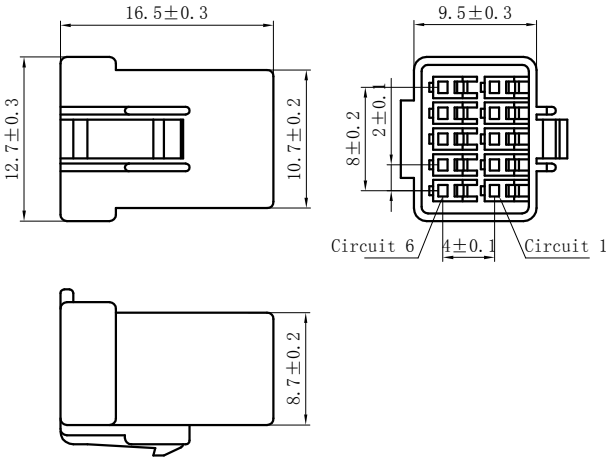


DL20023-12Y-750-RE

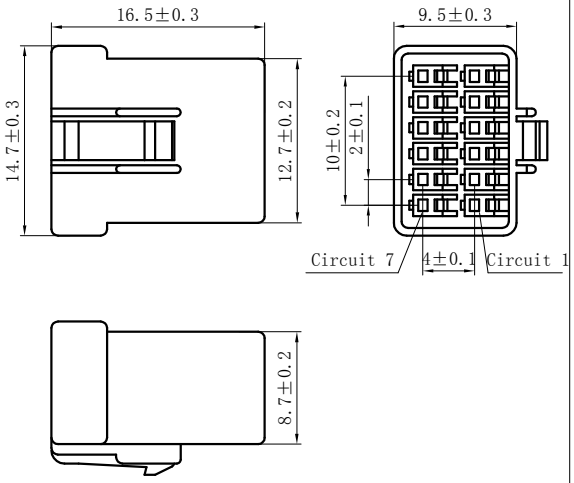

DL20023-14Y-750-RE

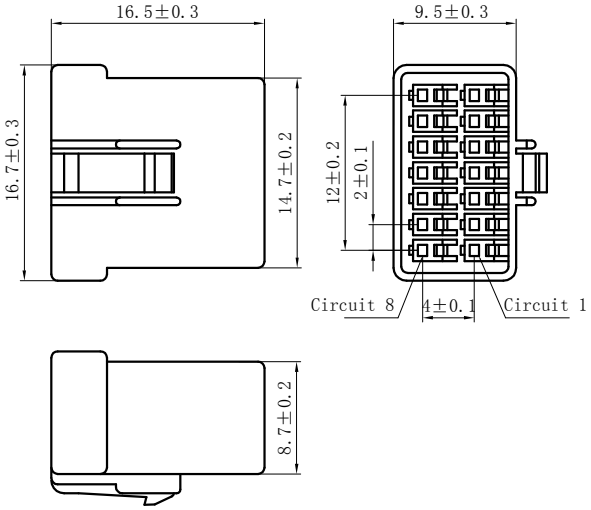

DL20023-16Y-750-RE

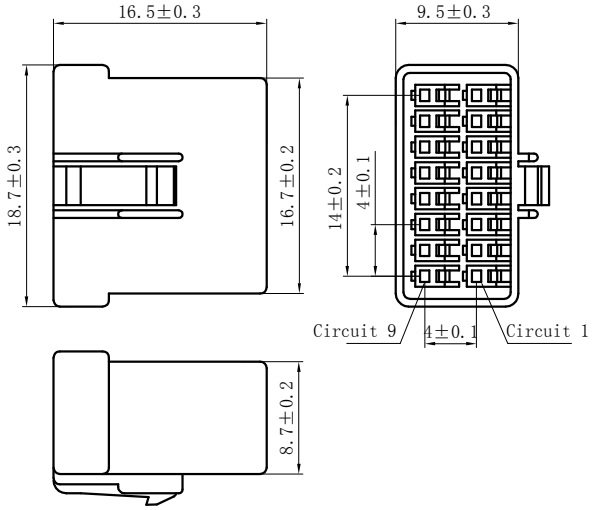


NOTES:

1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. lnsulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria
9. Color: Red


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° ± 3.0°	PRODUCT NAME: DL20023-Y-750-RE		TITLE: 2.0 mm Pitch Housing	
.XX: ± 0.15	.X° ± 2.0°				
.XXX: ± 0.01	.X° ± 1.0°	DR:Chen Quan Long	DATE:21/08/01	PART NO:	
FINISH:		CHKD:Wu Hui	DATE:21/08/01	SCALE: N/A	PAGE:2/2
DRAWING NO:		APPD:Ren An De	DATE:21/08/01	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-2R-750

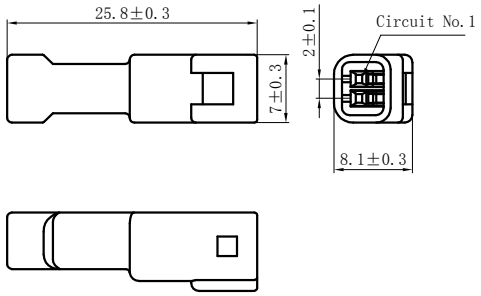


DL20023-3R-750

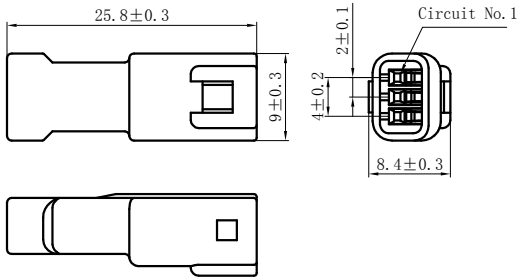


DL20023-8R-750

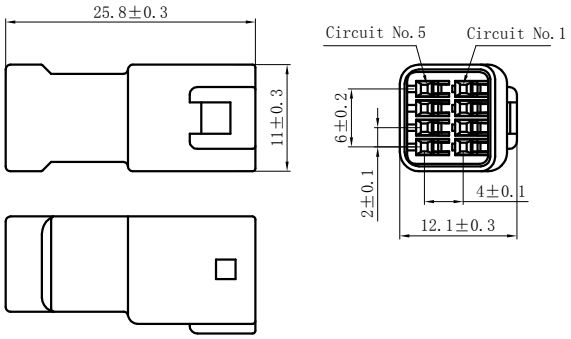

DL20023-4R-750

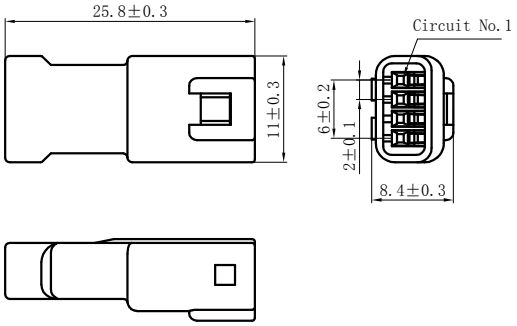

DL20023-6R-750

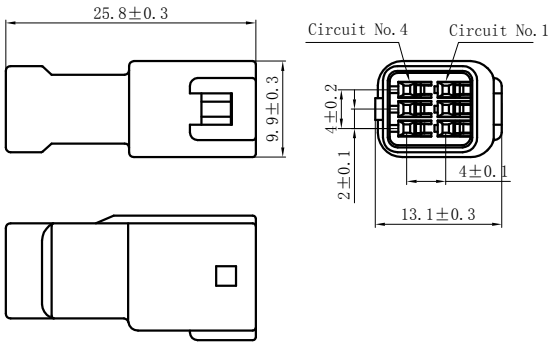


NOTES:

1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. Insulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° : ± 3.0°	PRODUCT NAME: DL20023-R-750		TITLE: 2.0 mm Pitch Wire To Wire Receptacle Housing	
.XX: ± 0.15	.X° : ± 2.0°				
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Chen Quan Long	DATE:21/08/01	PART NO:	
FINISH:		CHKD:Wu Hui	DATE:21/08/01	SCALE: N/A	PAGE:1/2
DRAWING NO:		APPD:Ren An De	DATE:21/08/01	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD

DL20023-10R-750

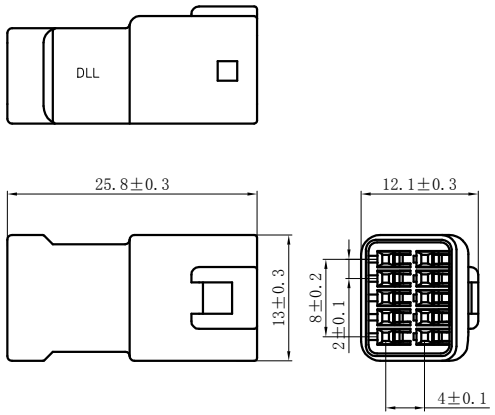


DL20023-12R-750

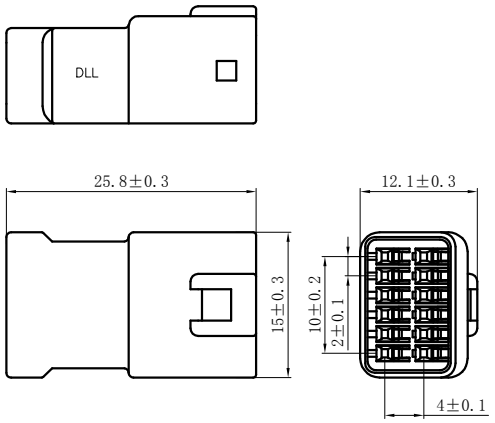


NOTES:

1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. lnsulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria

DL20023-14R-750

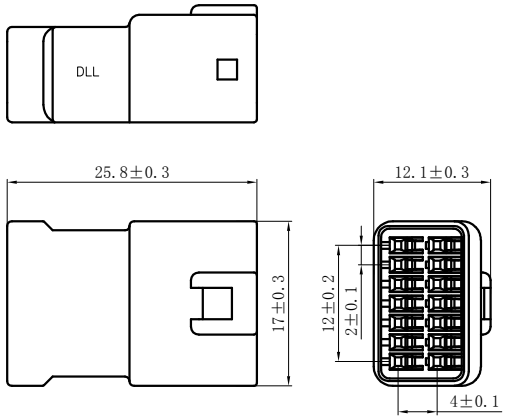


DL20023-16R-750

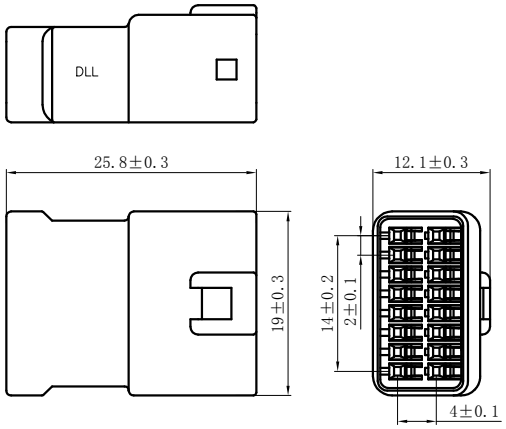


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° : ± 3.0°	PRODUCT NAME: DL20023-R-750		TITLE: 2.0 mm Pitch Wire To Wire Receptacle Housing	
.XX: ± 0.15	.X° : ± 2.0°				
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Chen Quan Long	DATE:21/08/01	PART NO:	
FINISH:		CHKD:Wu Hui	DATE:21/08/01	SCALE: N/A	PAGE:2/2
DRAWING NO:		APPD:Ren An De	DATE:21/08/01	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-2R-750-BL

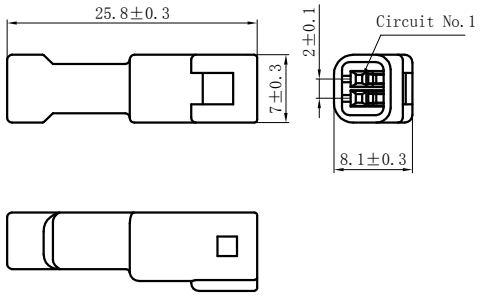


DL20023-3R-750-BL

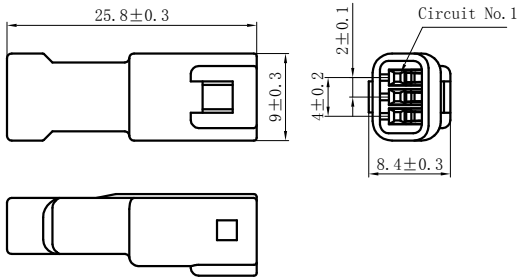


DL20023-8R-750-BL

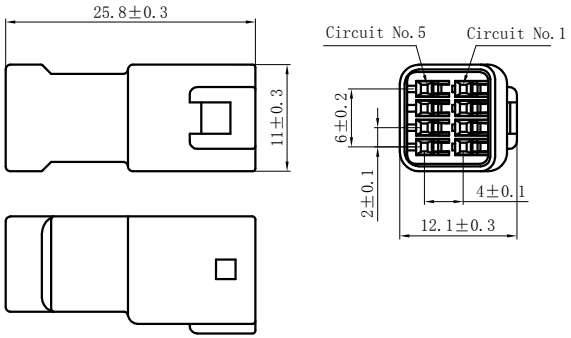

DL20023-4R-750-BL

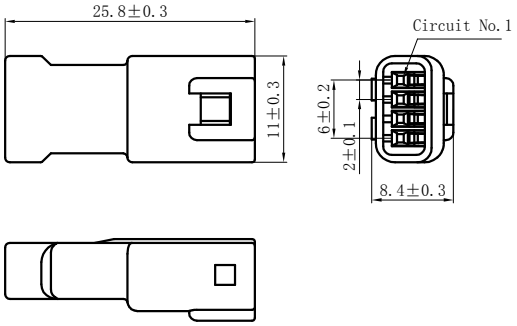

DL20023-6R-750-BL

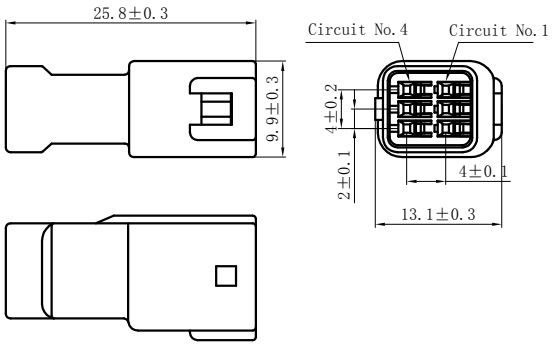


NOTES:

1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. Insulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria
9. Color: Blue


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD		
.X: ± 0.30	X° : ± 3.0°	PRODUCT NAME: DL20023-R-750-BL		TITLE: 2.0 mm Pitch Wire To Wire Receptacle Housing
.XX: ± 0.15	.X° : ± 2.0°			
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Chen Quan Long	DATE:21/08/01	PART NO:
FINISH:		CHKD:Wu Hui	DATE:21/08/01	SCALE: N/A / PAGE:1/2
DRAWING NO:		APPD:Ren An De	DATE:21/08/01	UNITS: mm / REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD

DL20023-10R-750-BL

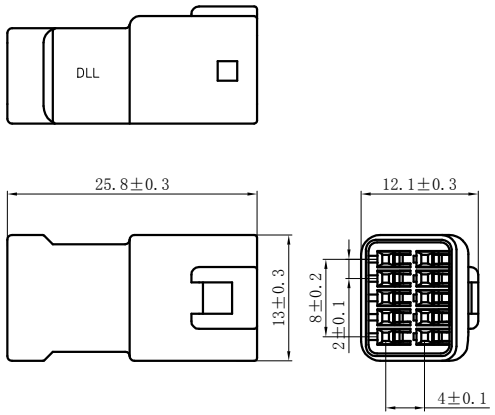


DL20023-12R-750-BL

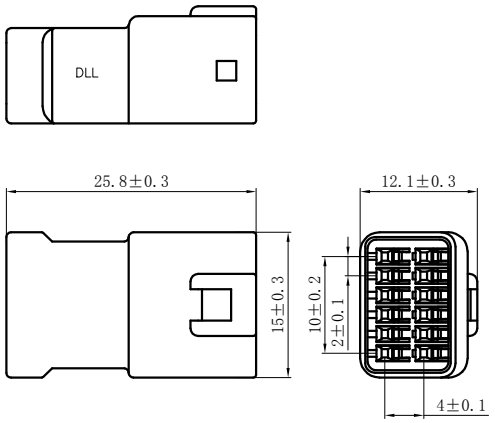


NOTES:

1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ⩽15 mΩ
4. lnsulation resistance: ⩾1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria
9. Color: Blue

DL20023-14R-750-BL

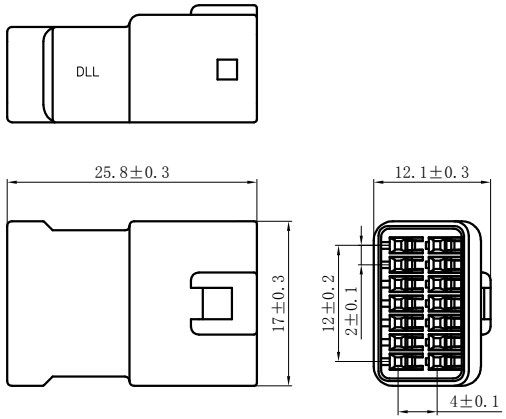


DL20023-16R-750-BL

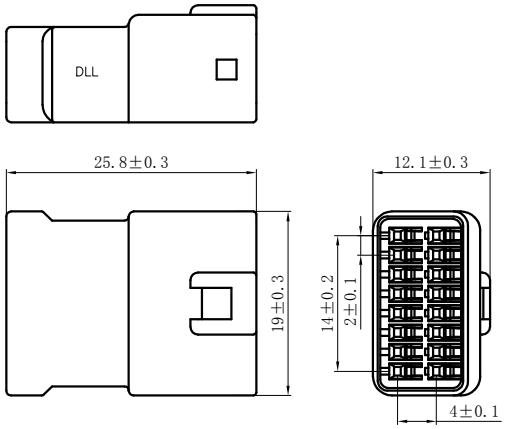


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° : ± 3.0°	PRODUCT NAME: DL20023-R-750-BL		TITLE: 2.0 mm Pitch Wire To Wire Receptacle Housing	
.XX: ± 0.15	.X° : ± 2.0°				
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Chen Quan Long	DATE:21/08/01	PART NO:	
FINISH:		CHKD:Wu Hui	DATE:21/08/01	SCALE: N/A	PAGE:2/2
DRAWING NO:		APPD:Ren An De	DATE:21/08/01	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-2R-750-BK

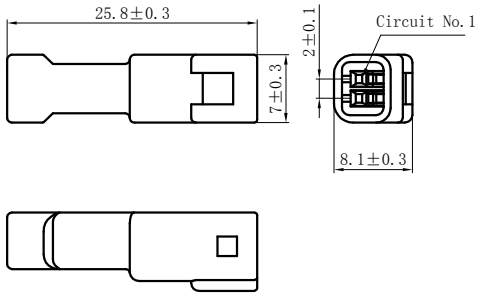


DL20023-3R-750-BK

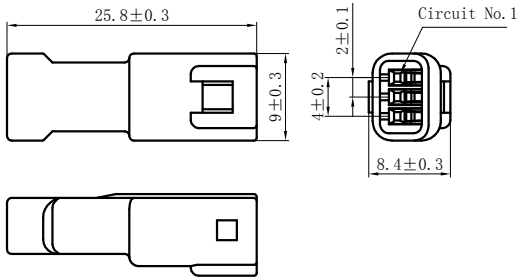


DL20023-8R-750-BK

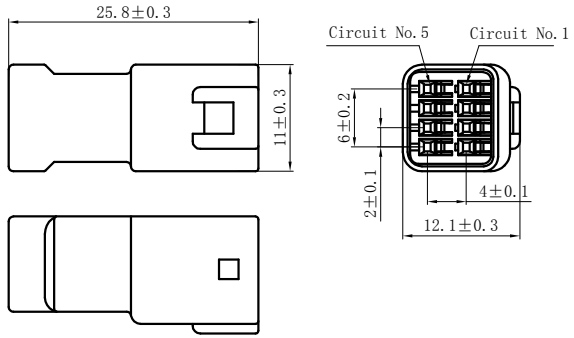

DL20023-4R-750-BK

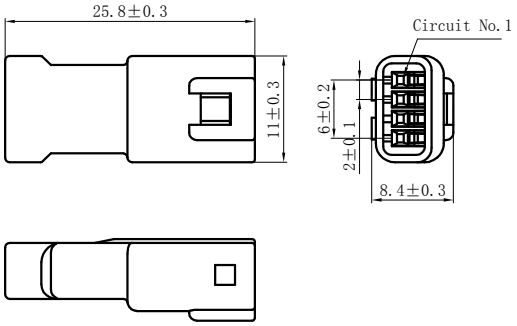

DL20023-6R-750-BK

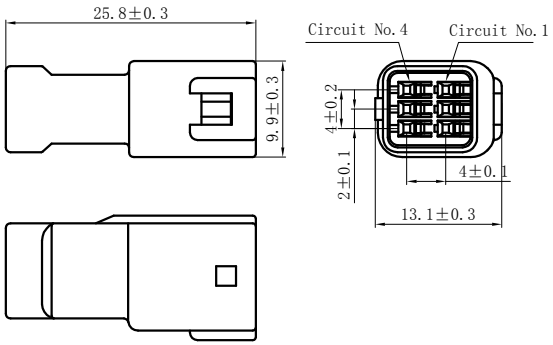


NOTES:

1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. Insulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria
9. Color: Black


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° : ± 3.0°	PRODUCT NAME: DL20023-R-750-BK		TITLE: 2.0 mm Pitch Wire To Wire Receptacle Housing	
.XX: ± 0.15	.X° : ± 2.0°				
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Chen Quan Long	DATE:21/08/01	PART NO:	
FINISH:		CHKD:Wu Hui	DATE:21/08/01	SCALE: N/A	PAGE:1/2
DRAWING NO:		APPD:Ren An De	DATE:21/08/01	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD

DL20023-10R-750-BK

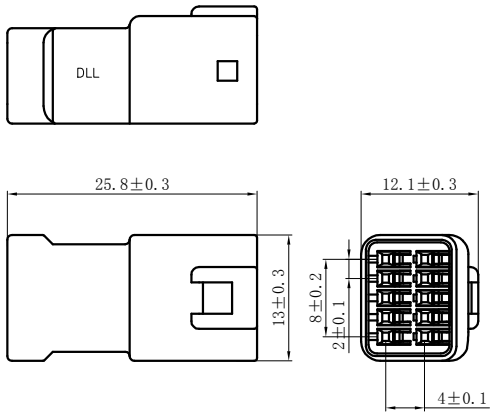


DL20023-12R-750-BK

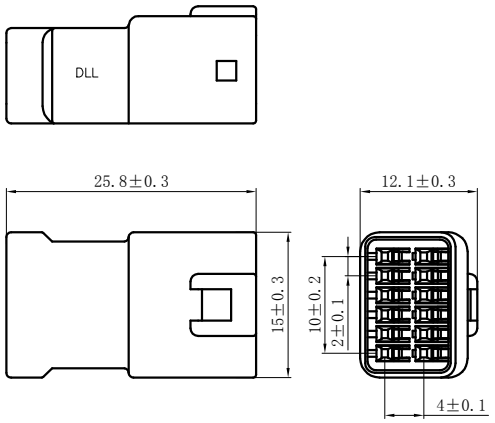


NOTES:

1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. lnsulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria
9. Color: Black

DL20023-14R-750-BK

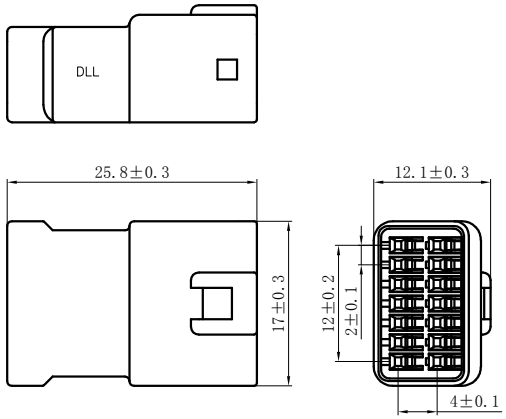


DL20023-16R-750-BK

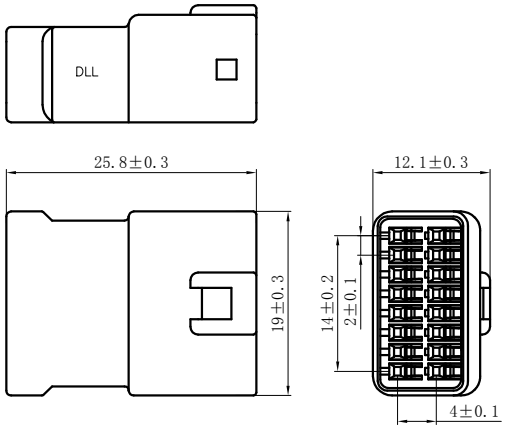


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° : ± 3.0°	PRODUCT NAME: DL20023-R-750-BK		TITLE: 2.0 mm Pitch Wire To Wire Receptacle Housing	
.XX: ± 0.15	.X° : ± 2.0°				
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Chen Quan Long	DATE:21/08/01	PART NO:	
FINISH:		CHKD:Wu Hui	DATE:21/08/01	SCALE: N/A	PAGE:2/2
DRAWING NO:		APPD:Ren An De	DATE:21/08/01	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-2AS-750

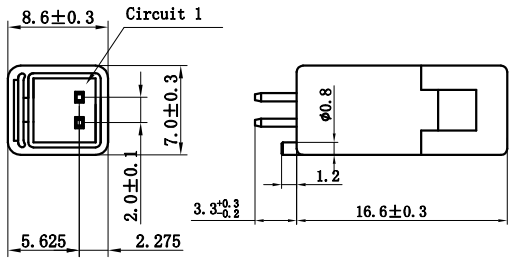


DL20023-6AS-750

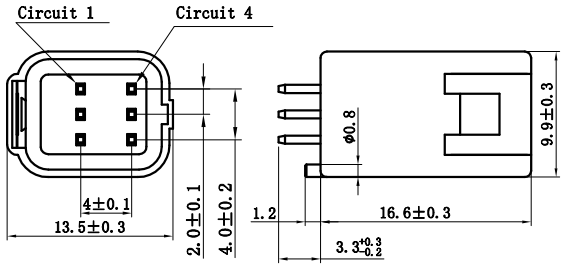


DL20023-3AS-750

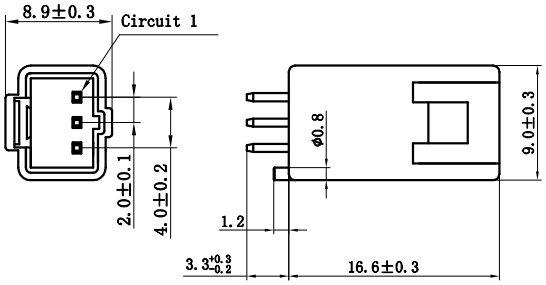


DL20023-8AS-750

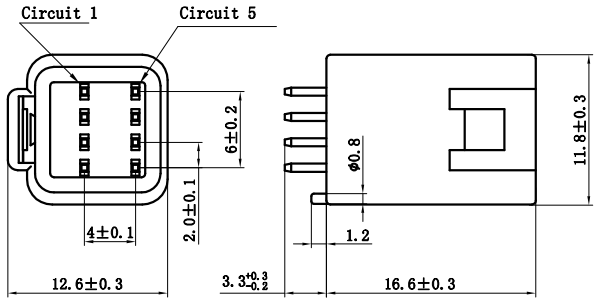

DL20023-4AS-750

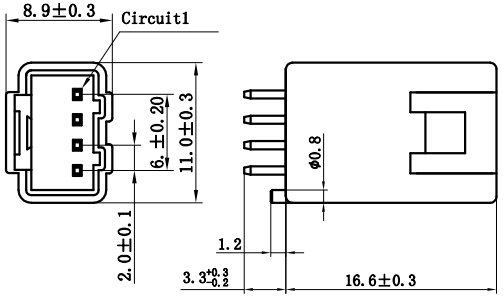

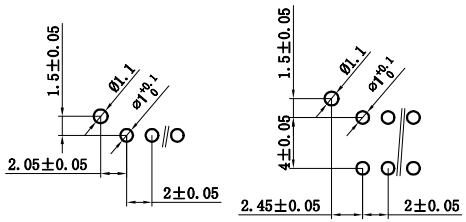

PCB LAYOUT


NOTES:

1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. Insulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD		
.X: ± 0.30	X° : ± 3.0°	PRODUCT NAME: DL20023-AS-750		TITLE: 2.0 mm Pitch Wire To Board Wafer
.XX: ± 0.15	.X° : ± 2.0°			
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Yuan Jun Rong	DATE:20.10.12	PART NO:
FINISH:		CHKD: Wu Hui	DATE:20.10.12	SCALE: N/A / PAGE:1/2
DRAWING NO:		APPD:Ren An De	DATE:20.10.12	UNITS: mm / REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-10AS-750

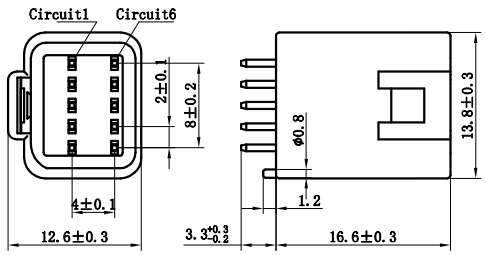


DL20023-12AS-750

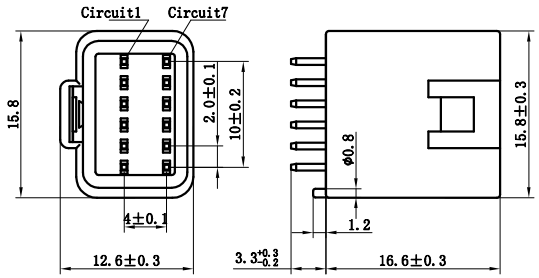

DL20023-14AS-750

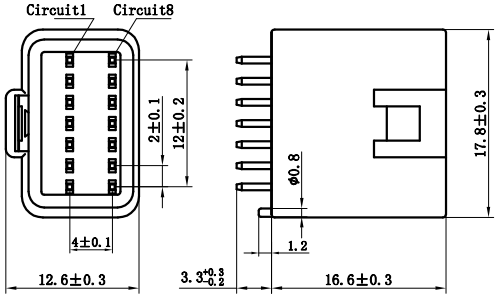


DL20023-16AS-750

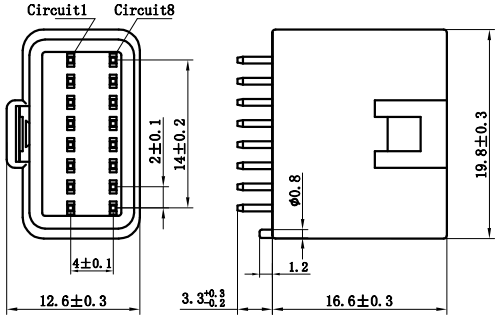

NOTES:

1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ⩽15 mΩ
4. lnsulation resistance: ⩾1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria




PCB LAYOUT


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° : ± 3.0°	PRODUCT NAME: DL20023-AS-750		TITLE: 2.0 mm Pitch Wire To Board Wafer	
.XX: ± 0.15	.X° : ± 2.0°				
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Yuan Jun Rong	DATE:20.10.12	PART NO:	
FINISH:		CHKD: Wu Hui	DATE:20.10.12	SCALE: N/A	PAGE:2/2
DRAWING NO:		APPD:Ren An De	DATE:20.10.12	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-2AS-750-YE

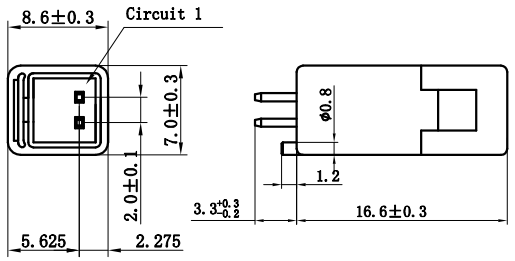


DL20023-6AS-750-YE

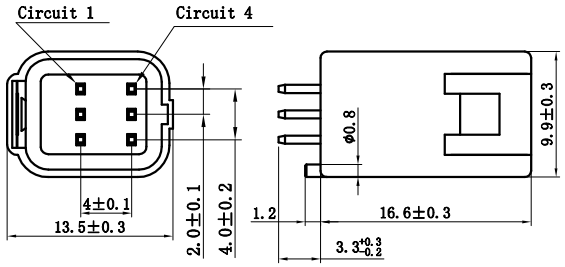


DL20023-3AS-750-YE

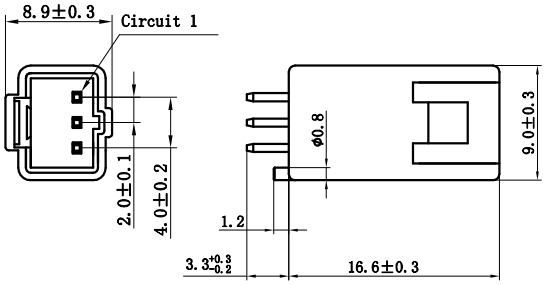


DL20023-8AS-750-YE

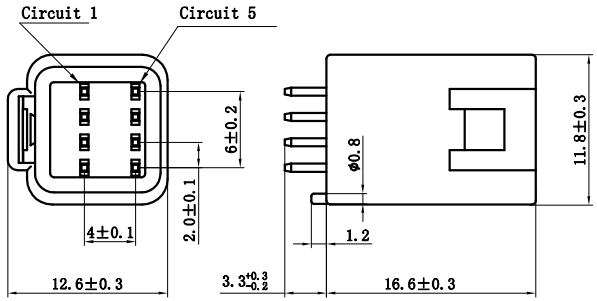

DL20023-4AS-750-YE

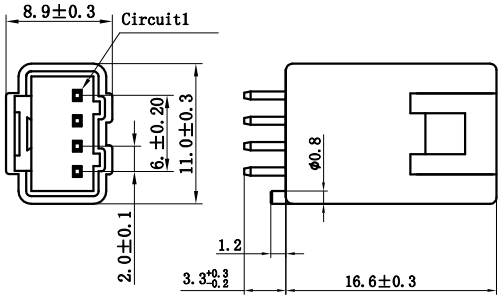

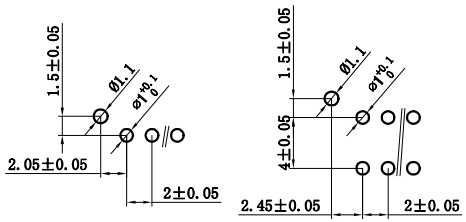


PCB LAYOUT

NOTES:
1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. Insulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria
9. Color: Yellow


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD		
.X: ± 0.30	X° : ± 3.0°	PRODUCT NAME: DL20023-AS-750-YE		TITLE: 2.0 mm Pitch Wire To Board Wafer
.XX: ± 0.15	.X° : ± 2.0°			
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Yuan Jun Rong	DATE:20.10.12	PART NO:
FINISH:		CHKD: Wu Hui	DATE:20.10.12	SCALE: N/A / PAGE:1/2
DRAWING NO:		APPD:Ren An De	DATE:20.10.12	UNITS: mm / REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-10AS-750-YE

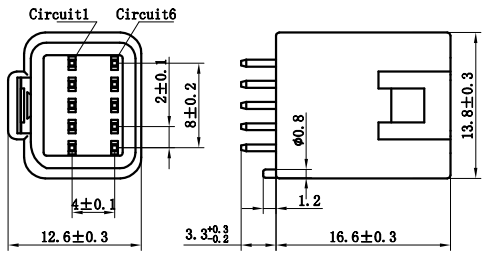


DL20023-12AS-750-YE

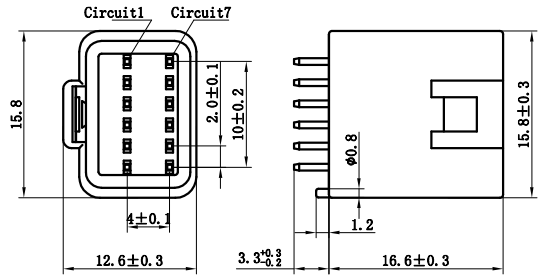

DL20023-14AS-750-YE

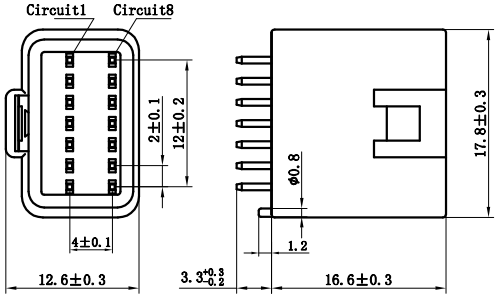


DL20023-16AS-750-YE

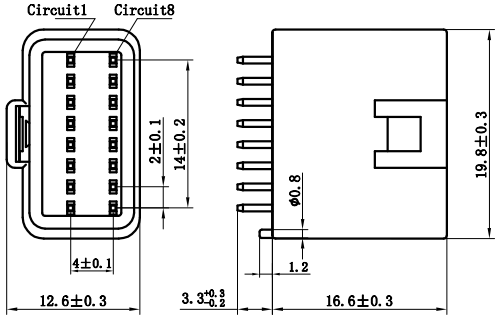

NOTES:

1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ⩽15 mΩ
4. lnsulation resistance: ⩾1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria
9. Color: Yellow




PCB LAYOUT


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° : ± 3.0°	PRODUCT NAME: DL20023-AS-750-YE		TITLE: 2.0 mm Pitch Wire To Board Wafer	
.XX: ± 0.15	.X° : ± 2.0°				
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Yuan Jun Rong	DATE:20.10.12	PART NO:	
FINISH:		CHKD: Wu Hui	DATE:20.10.12	SCALE: N/A	PAGE:2/2
DRAWING NO:		APPD:Ren An De	DATE:20.10.12	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-2AS-750-BK

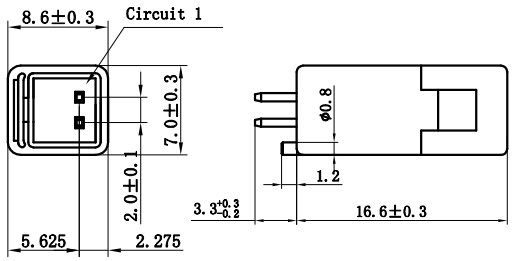


DL20023-6AS-750-BK

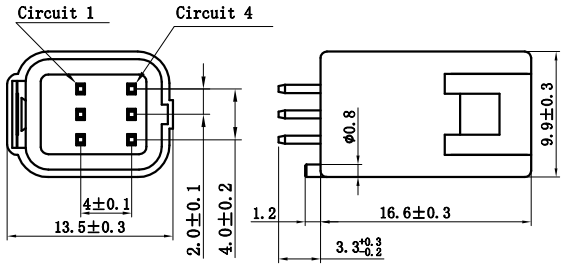


DL20023-3AS-750-BK

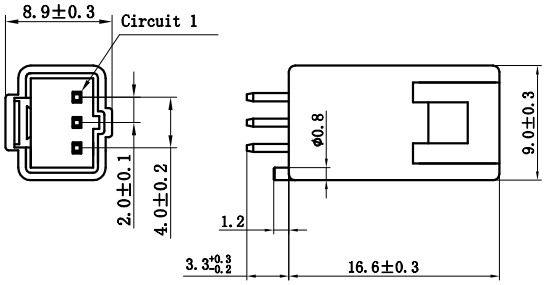


DL20023-8AS-750-BK

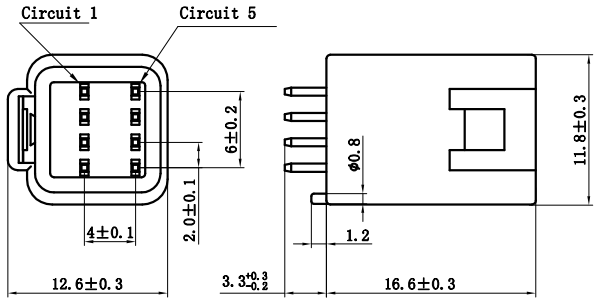

DL20023-4AS-750-BK

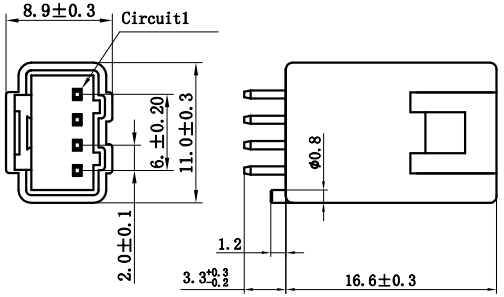

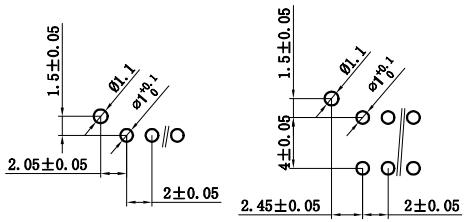


PCB LAYOUT

NOTES:
1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. Insulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria
9. Color: Black


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° : ± 3.0°	PRODUCT NAME: DL20023-AS-750-BK		TITLE: 2.0 mm Pitch Wire To Board Wafer	
.XX: ± 0.15	.X° : ± 2.0°				
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Yuan Jun Rong	DATE:20.10.12	PART NO:	
FINISH:		CHKD: Wu Hui	DATE:20.10.12	SCALE: N/A	PAGE:1/2
DRAWING NO:		APPD:Ren An De	DATE:20.10.12	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD


DL20023-10AS-750-BK

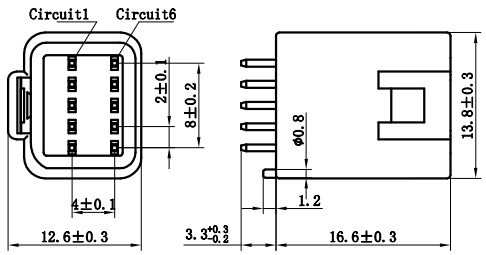


DL20023-12AS-750-BK

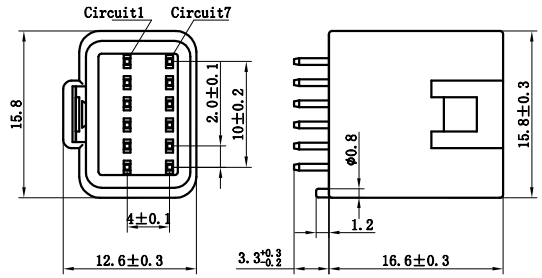

DL20023-14AS-750-BK

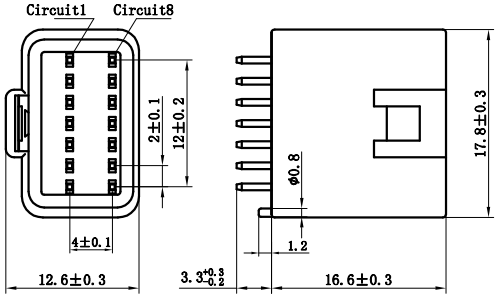


DL20023-16AS-750-BK

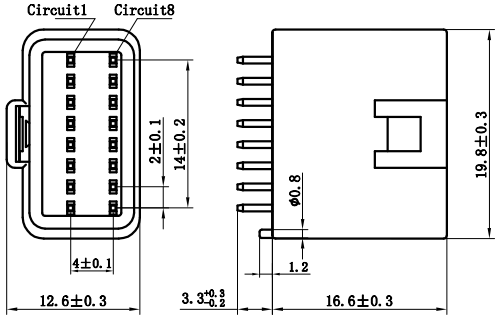

NOTES:


1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ⩽15 mΩ
4. lnsulation resistance: ⩾1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Materials: PA66 UL94V-0 750℃
8. Matched RoHS criteria
9. Color: Black



PCB LAYOUT

GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.30	X° : ± 3.0°	PRODUCT NAME: DL20023-AS-750-BK		TITLE: 2.0 mm Pitch Wire To Board Wafer	
.XX: ± 0.15	.X° : ± 2.0°				
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Yuan Jun Rong	DATE:20.10.12	PART NO:	
FINISH:		CHKD: Wu Hui	DATE:20.10.12	SCALE: N/A	PAGE:2/2
DRAWING NO:		APPD:Ren An De	DATE:20.10.12	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD

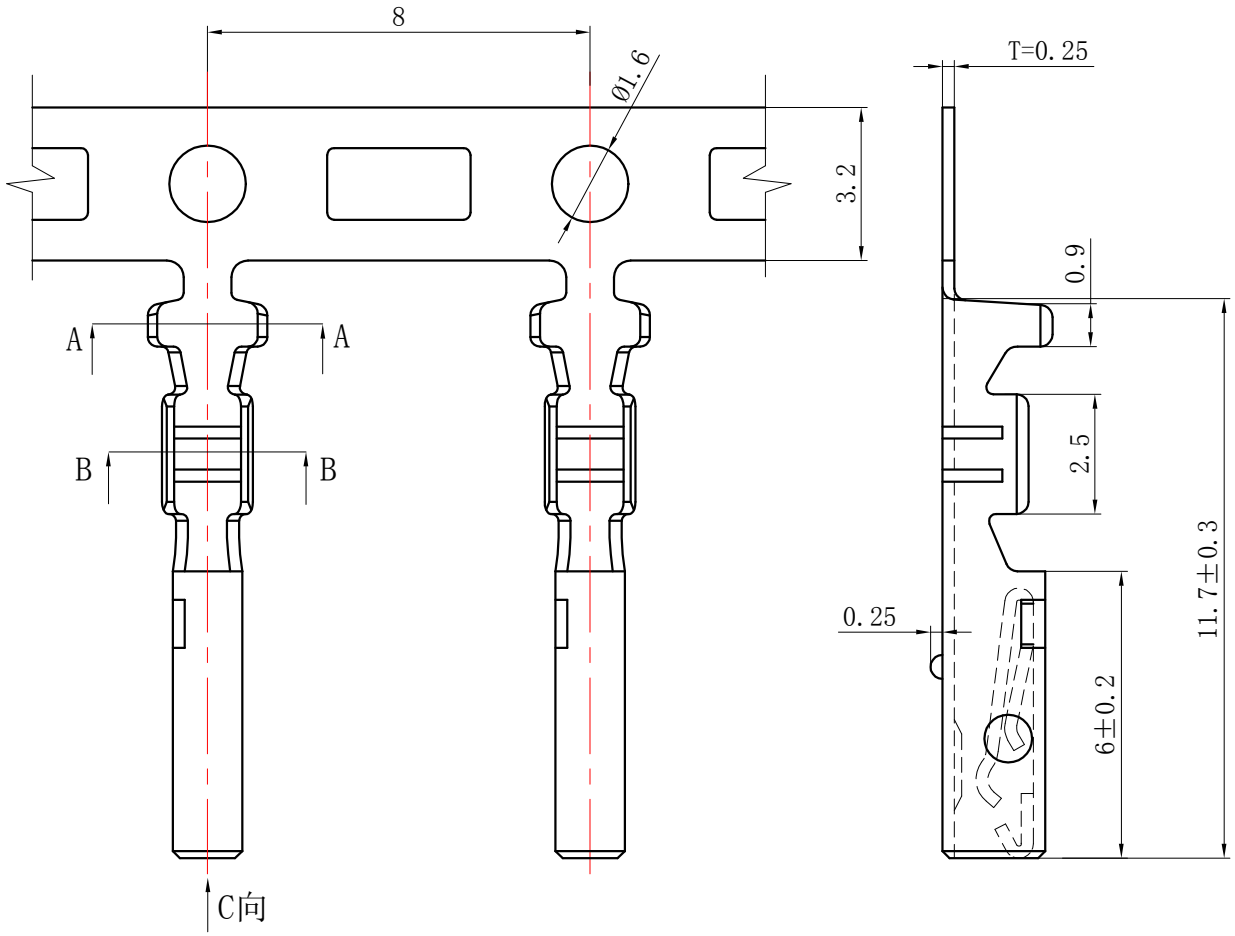


NOTES:


1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. Insulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Wire range：AWG#26～#22

Materials：


8. Terminal：Phosphor bronze,Tin plated



SECTION A-A




SECTION B-B



SECTION C-C

GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD			
.X: ± 0.25	X° : ± 3.0°	PRODUCT NAME: DL20023-T		TITLE: 2.00 mm Pitch Crimp Terminal	
.XX: ± 0.15	.X° : ± 2.0°	DR:Chen Quan Long	DATE:20/12/23	PART NO:	
.XXX: ± 0.01	.XX° : ± 1.0°	CHKD:Wu Hui	DATE:20/12/23	SCALE: N/A	PAGE: 1/1
FINISH:		APPD:Ren An De	DATE:20/12/23	UNITS: mm	REV.: A
DRAWING NO:					

REV.	REVISION DESCRIPTION	DATE	APPD

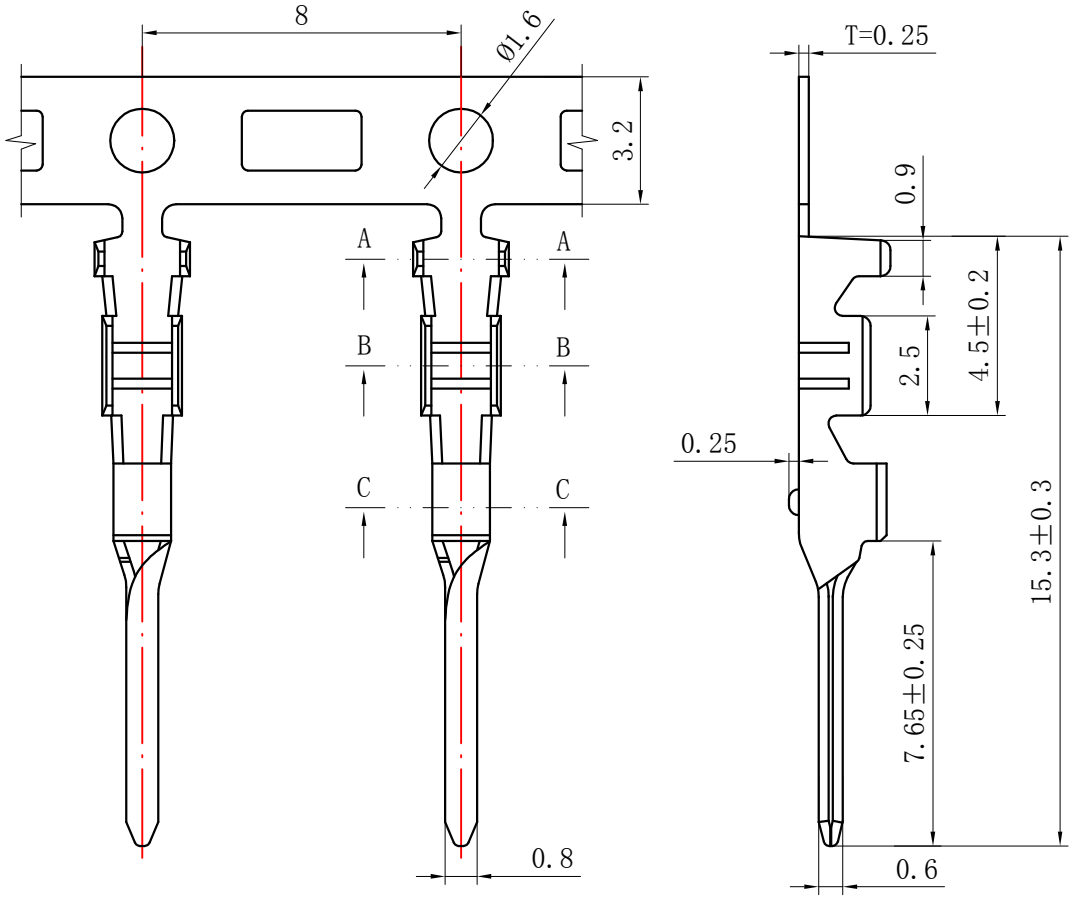


NOTES:


1. Rated voltage: 100V AC.DC
2. Rated current: 3A AC DC
3. Contact resistance: ≤15 mΩ
4. Insulation resistance: ≥1000 MΩ
5. Withstand voltage: 1000V AC/minute
6. Ambient temprature:-40℃～105℃
7. Wire range: AWG#26～#22

Materials:


8. Terminal: Phosphor bronze,Tin plated



SECTION A-A



SECTION B-B



SECTION C-C

GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO .,LTD		
.X: ± 0.25	X° : ± 3.0°	PRODUCT NAME: DL20023-RT		TITLE: 2.00 mm Pitch Wire To Wire Crimp Terminal
.XX: ± 0.15	.X° : ± 2.0°			
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Chen Quan Long	DATE:20/12/23	PART NO:
FINISH:		CHKD:Wu Hui	DATE:20/12/23	SCALE: N/A / PAGE: 1/1
DRAWING NO:		APPD:Ren An De	DATE:20/12/23	UNITS: mm / REV.: A