



* 所有原料材质,生产制程,电镀必须符合ROHS要求

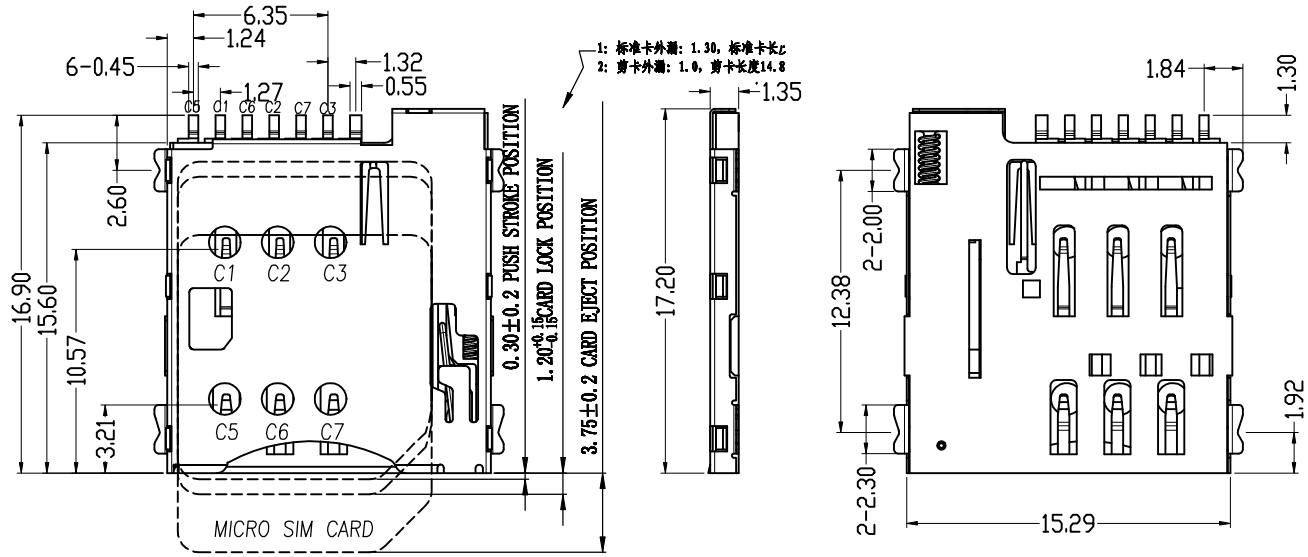

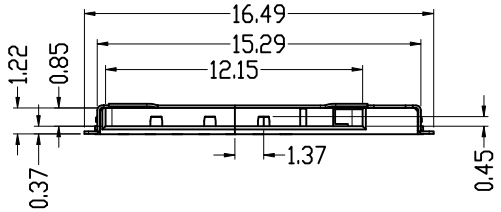



MICRO SIM CARD

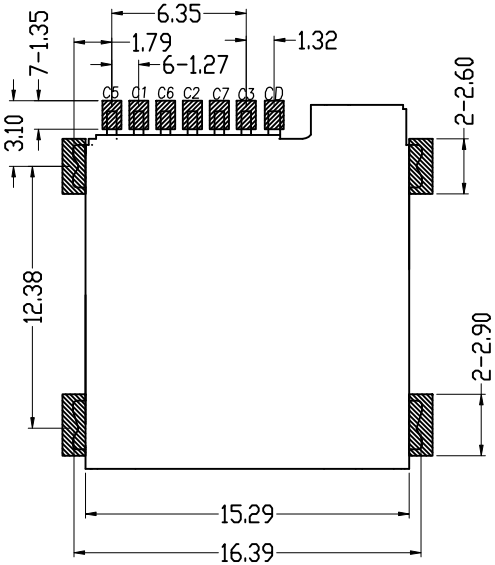

PCB 焊盘区

下沉避位区

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

SIM pin assignment	
PIN#	Name
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出

Specification

MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.
Contact: Copper Alloy
SHELL: SUS


PLATING:

Contact: Plated 50u'' Ni Overall Contact Au 1U
Shell: Plated 50u'' Ni Overall
Plated 1u"Au Selective Contact Area

Electrical:

Current Rating :0.5mA AC/DC max.
Voltage Rating :125V AC/DC
Ambient Temperature Range :-20° C~+60° C
Storage Temperature Range :-40° C~+70° C
Ambient Humidity Range :95% R.H. Max.
Contact Resistance:100m max. Ω
Insulation Resistance:1000M min./500VDC Ω
产品耐温温度: 260° C $^{+5}_{-5}$ C (SKL 70) C (SKL 70)+5 C
Mating Cycles:3000Min Insertions

CRICUIT DIAGRAM FOR CARD DETECT SWITCH




REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE


X.XX: ± 0.10
X.XXX: ± 0.05
ANGULAR: ± 1°


广东国连电子有限公司
GUANGDONG GUOLIAN ELECTRONICS CO.,LTD

PRODUCT NAME : MICRO-SIM 1.35H 7P无柱	DRAWING:	DATE:	
PRODUCT NO. : MIB5FW1072C1	CHECK:	DATE:	
DRAWING NO. :	APPROVED:	DATE:	
	SCALE: 1:1	DWG ID: C D	REV.: B
			PAGE: 1 OF 1


* 所有原料材质,生产制程,电镀必须符合ROHS要求

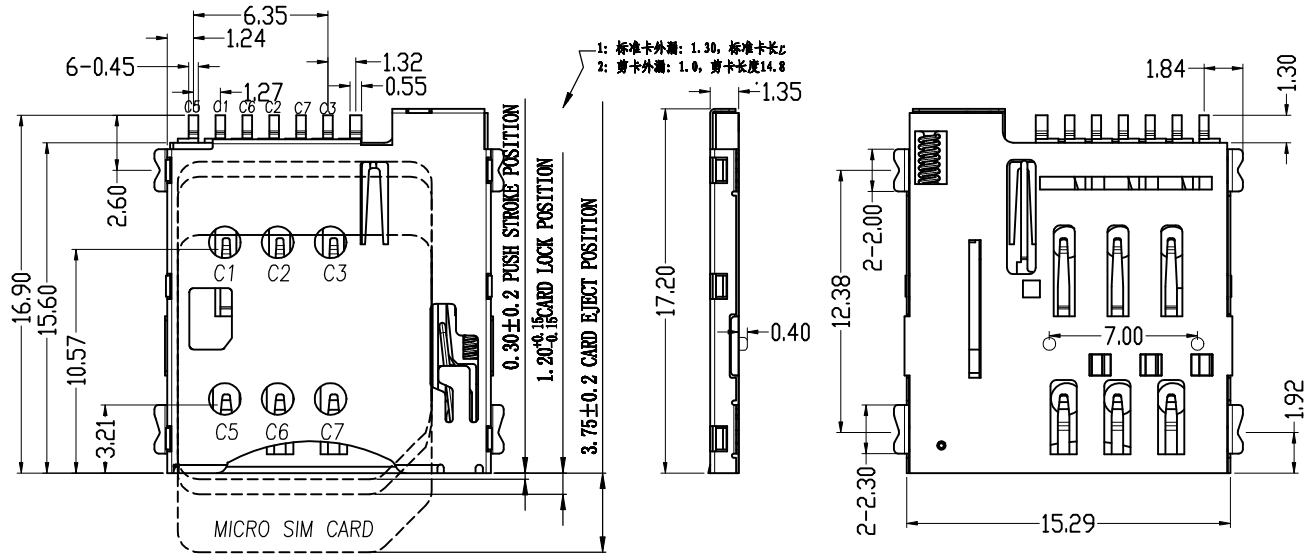

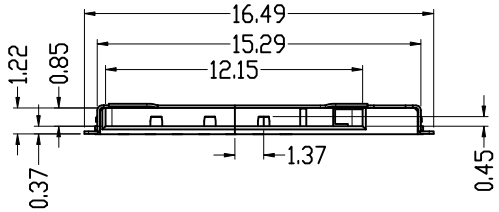



MICRO SIM CARD

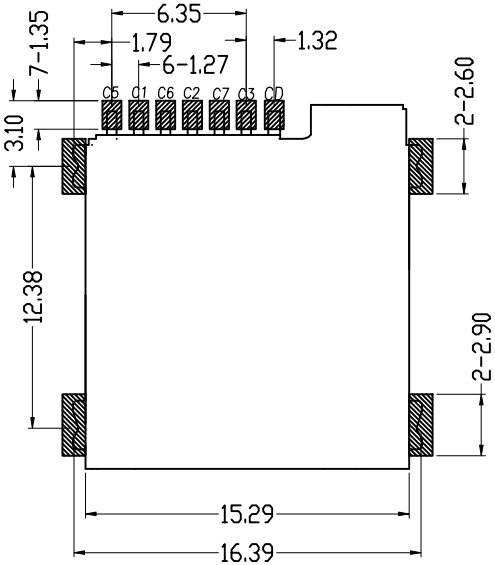

PCB 焊盘区

下沉避位区

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

SIM pin assignment	
PIN#	Name
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出

Specification

MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.
Contact: Copper Alloy
SHELL: SUS


PLATING:

Contact: Plated 50u'' Ni Overall Contact Au 1U
Shell: Plated 50u'' Ni Overall
Plated 1u"Au Selective Contact Area

Electrical:

Current Rating :0.5mA AC/DC max.
Voltage Rating :125V AC/DC
Ambient Temperature Range :-20° C~+60° C
Storage Temperature Range :-40° C~+70° C
Ambient Humidity Range :95% R.H. Max.
Contact Resistance:100m max. Ω
Insulation Resistance:1000M min./500VDΩ
产品耐温温度: 260° C $^{+5}_{-5}$ C (SKL.7D) C (SKL.7D+5 C)
Mating Cycles:3000Min Insertions

CRICUIT DIAGRAM FOR CARD DETECT SWITCH



REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE

X.XX: ± 0.10
X.XXX: ± 0.05
ANGULAR: ± 1°

广东国连电子有限公司
GUANGDONG GUOLIAN ELECTRONICS CO.,LTD

PRODUCT NAME : MICRO-SIM 1.35H 7P带柱	DRAWING:		DATE:
PRODUCT NO. : MIB5FW1072C1	CHECK:		DATE:
DRAWING NO. :	APPROVED:		DATE:
	SCALE: 1:1	DWG ID: C D	REV.: B
			PAGE: 1 OF 1