


Rev No.	Description of Revision	Date	Name	Approved	ECN No.
X					

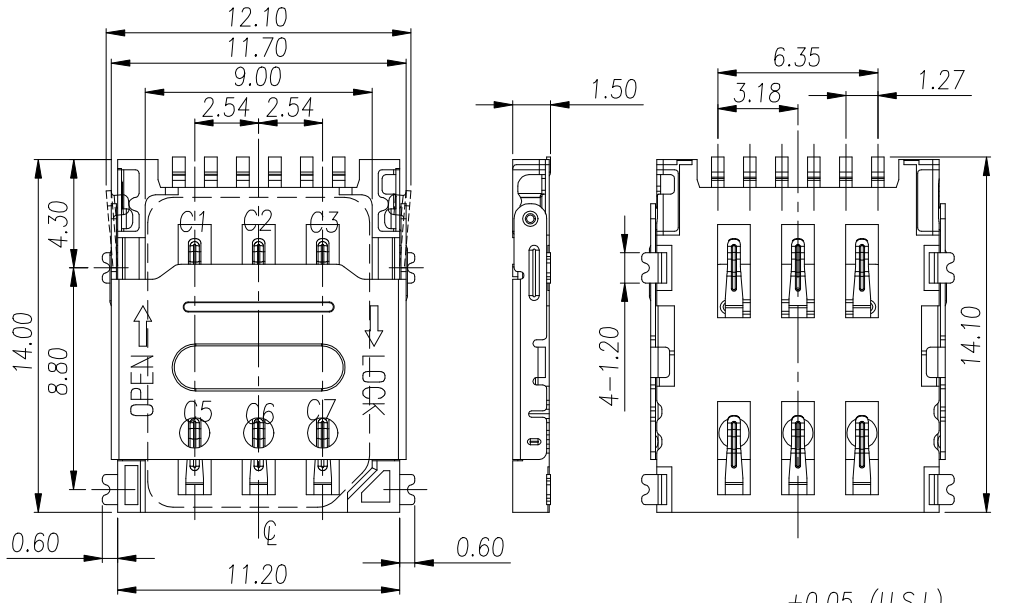


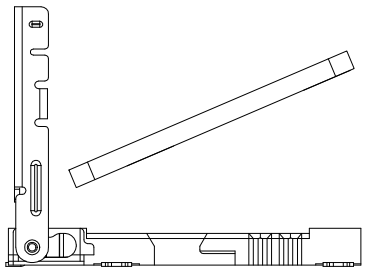


STEP 1 INSERT Micro-SIM CARD



STEP 2 PUSH THE SHELL




STEP 3 FINISH

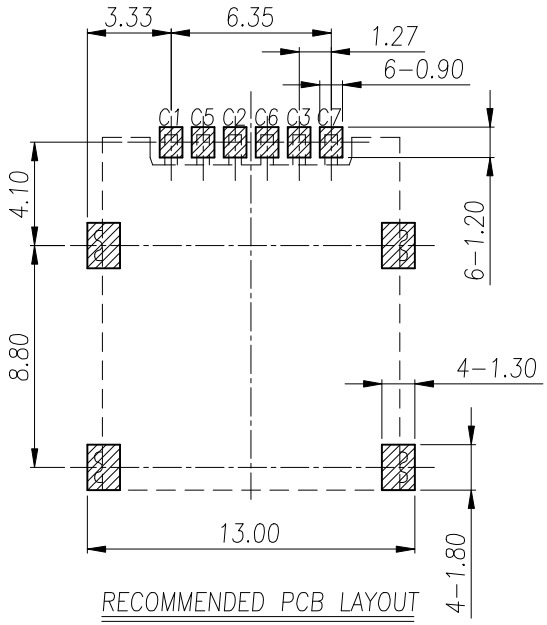

RECOMMENDED PCB LAYOUT
GENERAY TOLERANCE ±0.05

SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

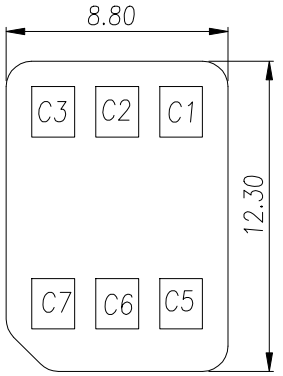

NANO SIM CARD

NOTES:

1. ELECTRICAL CHARACTERISTICS
   - 1-1. CONTACT RESISTANCE: 60 Milliohms Max
   - 1-2. INSULATION RESISTANCE: 1,000 Megohms Min.
   - 1-3. VOLTAGE RATING: 50V.
   - 1-4. CURRENT RATING: 1.0A.
2. MECHANICAL CHARACTERISTICS
   - 2-1. OPERATION TEMPERATURE RANGE: -20°C~+85°C
   - 2-2. DURABILITY: 5000 CYCLES
3. MATERIAL:
   - 3-1. HOUSING: THERMOPLASTIC,UL 94-V0
   - 3-2. TERMINAL: PHOSPHOR BRONZE,T=0.15
   - 3-3. SHELL: STAINLESS STEEL,T=0.20
4. FINISHED:
   - 4-1 1u" Au PLATED ON CONTACT AREA OR SOLDERING AREA 80u" NIECK PLATED OVER ALL,
   - 4-2 SHELL:80u" NIECK PLATED OVER ALL,

UNLESS OTHERWSE SPECIFED TOLERANCES		广东国连电子有限公司 GUANGDONG GUOLIAN ELECTRONICS CO.,LTD			
DECIMALS:	ANGLES	TITLE. NANO SIM 1.50H 掀盖式卡座			
X. ±0.20	X° ±2°	Drdwn. LIUCHUN	PART NO. NNB5FW1062E3		
X.X ±0.15	X.X° ±1°	Checked. LIUCHUN	SCALE. 3:10	UNIT. mm	PROJ.
X.XX ±0.10	X.XX° ±0.5°	Approved. LIUCHUN	SIZE. A4	SHEET. 1 OF 1	REV. A
X.XXX ±0.05		CUSTOMER COPY			