Silicon Epitaxial Planar Switching Diode

Features

- SOD-323 package
- Fast switching
- These diodes are also available in other case style including the DO-35 case with the type designation 1N4148, the MiniMELF case with the type designation LL4148 and the MicroMELF case with the type designation MCL4148.

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

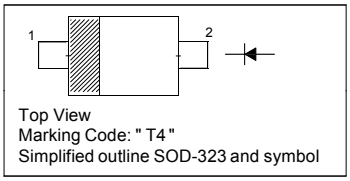

Top View
Marking Code: " T4 "
Simplified outline SOD-323 and symbol

Absolute Maximum Ratings (T_a = 25 °C)

Parameter	Symbol	Value	Unit
Peak Reverse Voltage	V_{RM}	100	V
Reverse Voltage	V_R	75	V
Average Rectified Forward Current	$I_{F(AV)}$	150	mA
Surge Forward Current (t < 1 s, T_j = 25°C)	I_{FSM}	350	mA
Power Dissipation	P_{tot}	200	mW
Thermal Resistance from Junction to Ambient Air	$R_{\theta JA}$	625	°C/W
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	- 65 to + 150	°C

Characteristics at T_a = 25 °C

Parameter	Symbol	Min.	Max.	Unit
Reverse Breakdown Voltage at I_R = 10 µA	$V_{(BR)R}$	75	-	V
Forward Voltage at I_F = 1 mA at I_F = 10 mA at I_F = 50 mA at I_F = 150 mA	V_F	 - - - -	 0.715 0.855 1 1.25	V
Peak Reverse Current at V_R = 75 V at V_R = 20 V at V_R = 75 V, T_J = 150 °C at V_R = 25 V, T_J = 150 °C	I_R	 - - - -	 1 25 50 30	 µA nA µA µA
Total Capacitance at V_R = 0 V, f = 1 MHz	C_T	-	2	pF
Reverse Recovery Time at I_{rr} = 0.1 X I_R, I_F = I_R = 10 mA, R_L = 100 Ω	t_{rr}	-	4	ns

Copyright © All right reserved： Heyuan China Base Electronics Technology Co., Ltd.

Forward characteristics

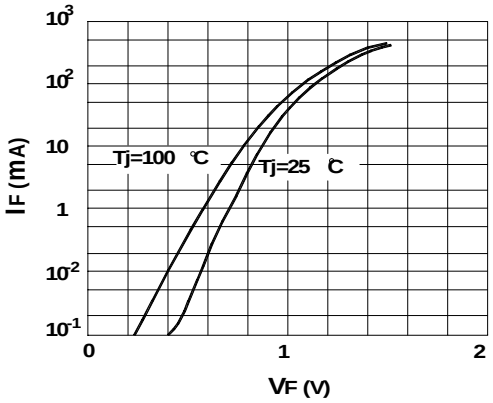

Dynamic forward resistance vs. forward current

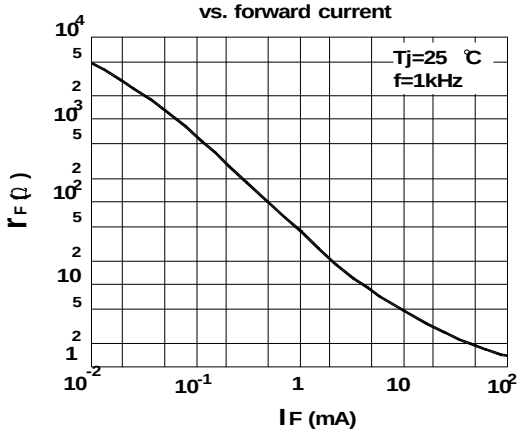

Reverse capacitance vs. reverse voltage

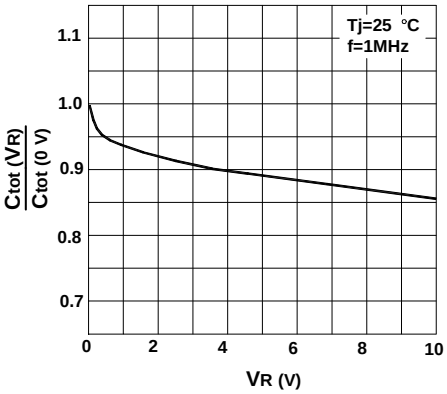

Amissible repetitive peak forward current vs. pulse duration

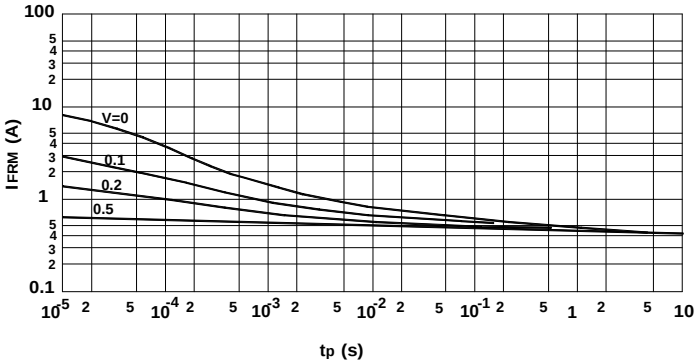

Copyright © All right reserved： Heyuan China Base Electronics Technology Co., Ltd.