TRANSISTOR (NPN)

FEATURES

Complementary to S9015

MARKING: J6

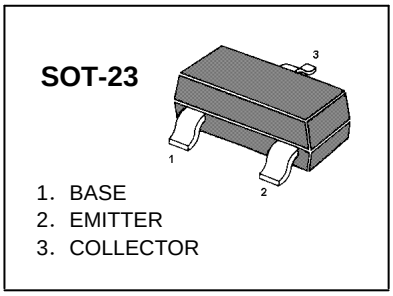

MAXIMUM RATINGS (T_A=25℃ unless otherwise noted)

Symbol	Parameter	value	units
V_{CBO}	Collector-Base Voltage	50	V
V_{CEO}	Collector-Emitter Voltage	45	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current-Continuous	0.1	A
P_C	Collector Power Dissipation	0.2	W
T_J	Junction Temperature	150	℃
T_{STG}	Storage Temperature	-55-150	℃

ELECTRICAL CHARACTERISTICS (Tamb=25℃ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	I_C= 100μA, I_E=0	50			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	I_C= 0.1mA, I_B=0	45			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	I_E=100μA, I_C=0	5			V
Collector cut-off current	I_{CBO}	V_{CB}=50V, I_E=0			0.1	μA
Collector cut-off current	I_{CEO}	V_{CE}=35V, I_B=0			1	μA
Emitter cut-off current	I_{EBO}	V_{EB}= 3V, I_C=0			0.1	μA
DC current gain	h_{FE}	V_{CE}=5V, I_C= 1mA	200		450	
Collector-emitter saturation voltage	V_{CE}(sat)	I_C=100 mA, I_B= 5mA			0.3	V
Base-emitter saturation voltage	V_{BE}(sat)	I_C=100 mA, $_B$= 5mA			1	V
Transition frequency	f_T	V_{CE}=5V, I_C= 10mA f=30MHz	150			MHz

Copyright © All right reserved: Heyuan China Base Electronics Technology Co., Ltd.

Typical Characteristics S9014

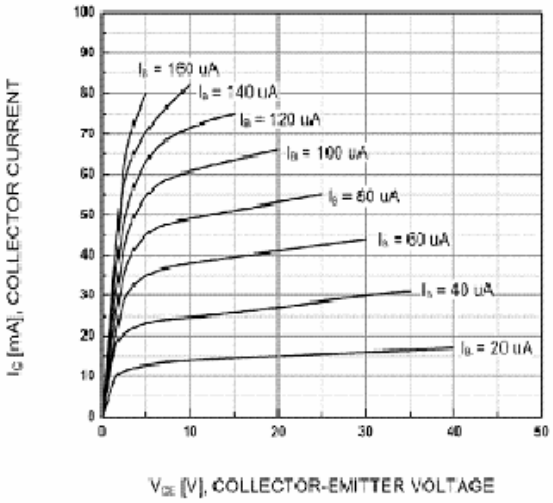

Static Characteristic

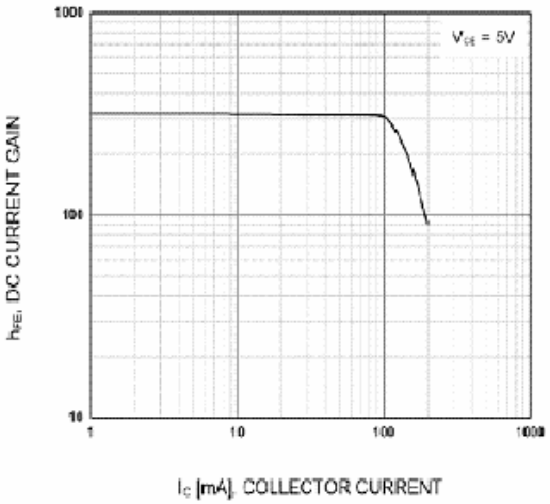

DC current Gain

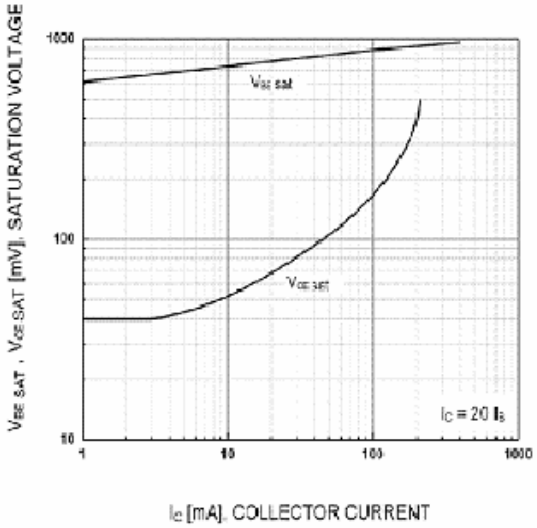

Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

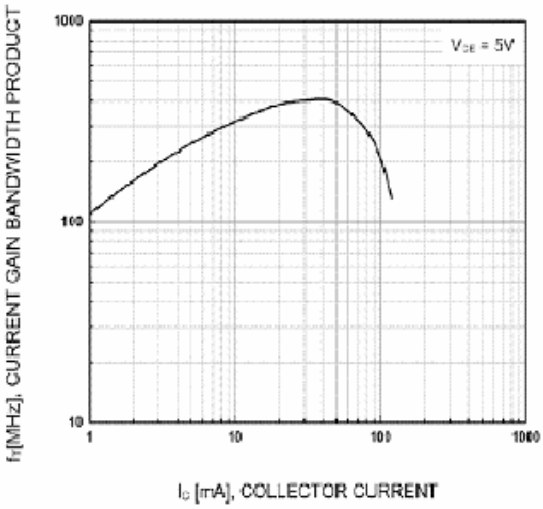

Current Gain Bandwidth Product

Copyright © All right reserved: Heyuan China Base Electronics Technology Co., Ltd.