
SOT-23 Plastic-Encapsulate Diodes


FEATURES

- Dual Swithching Diode
- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion
- For General Purpose Switching Applications

SOT-23

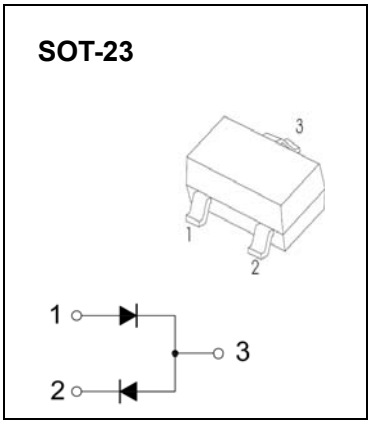

MARKING: M5C



M5C= Device code

Maximum Ratings@Ta=25℃


Parameter	Symbol	Limits	Unit
Non-Repetitive Peak Reverse Voltage	V_{RM}	100	V
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage	V_{RRM} V_{RWM}	75	V
RMS Reverse Voltage	$V_{R(RMS)}$	53	V
Average Rectified Output Current	I_O	200	mA
Non-Repetitive Peak Forward Surge Current @ t =8.3 ms	I_{FSM}	2	A
Power Dissipation	P_D	225	mW
Thermal Resistance,Junction to Ambient	$R_{\theta JA}$	556	℃/W
Operation Junction and Storage Temperature Range	T_J,T_{STG}	-55~+150	℃

ELECTRICAL CHARACTERISTICS (Ta=25℃ unless otherwise specified)


Parameter	Symbol	Test conditions	Min	Max	Unit
Reverse breakdown voltage	$V_{(BR)}$	I_R=100μA	100		V
Reverse voltage leakage current	I_R	V_R=50V V_R=100V		1.0 3.0	μA
Forward voltage	V_F	I_F=1mA I_F=10mA I_F=100mA	0.55 0.67 0.75	0.7 0.82 1.1	V
Diode capacitance	C_T	V_R=0V,f =1.0MHz		2	pF
Reverse recovery time	t_{rr}	I_F=I_R=10mA, Irr=0.1 x IR,RL=100Ω		4	ns

Typical Characteristics


Forward Characteristics

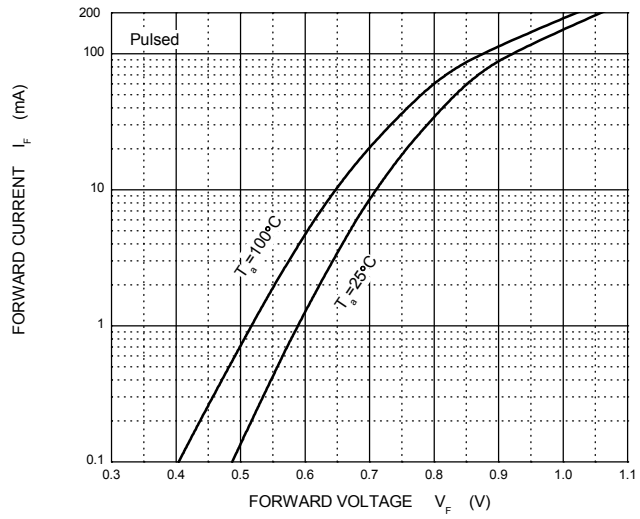


Reverse Characteristics

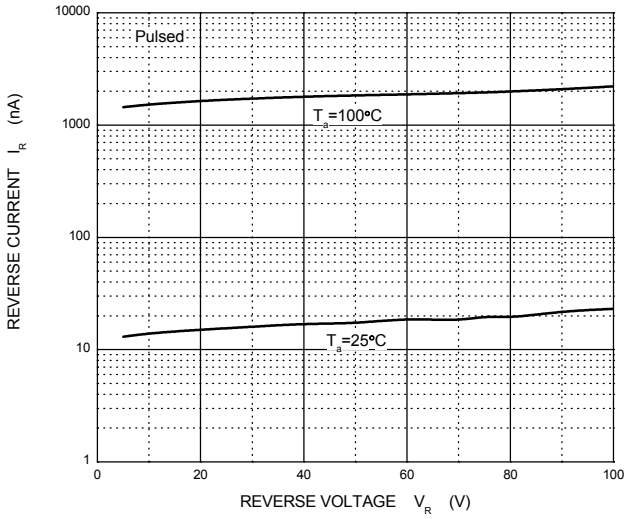


Capacitance Characteristics

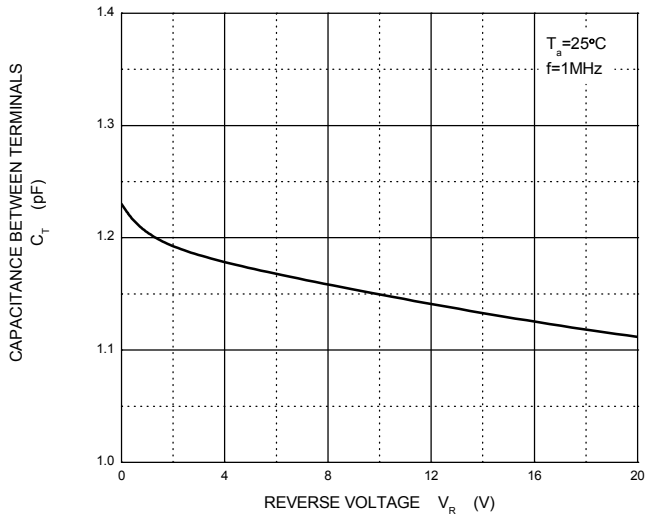



Power Derating Curve

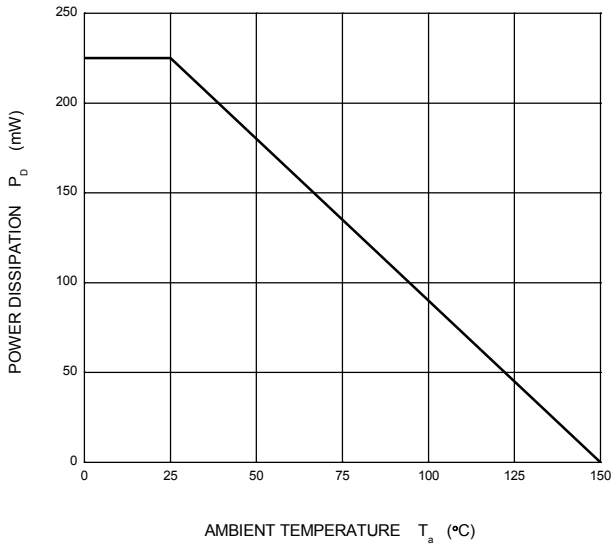

SOT-23 Package Outline Dimensions








Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout



Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.