



Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

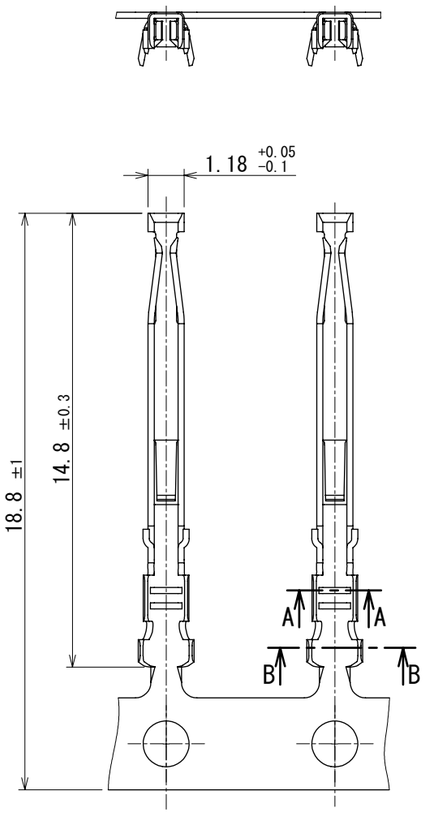


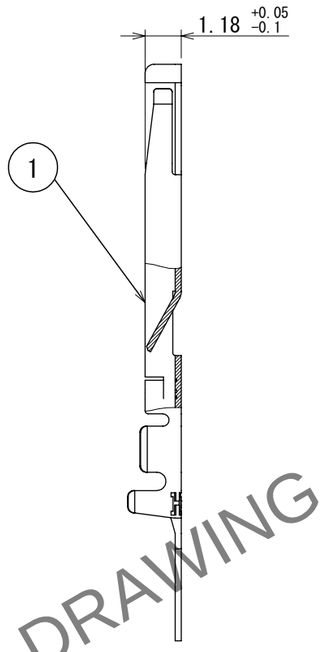


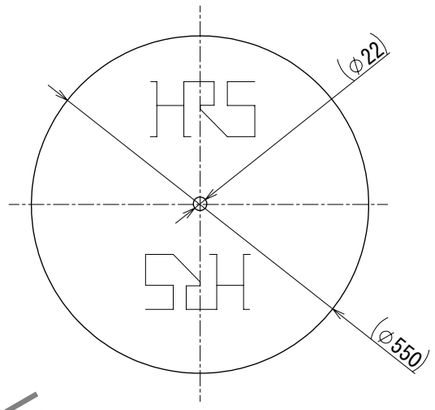

Reel (1 : 10)

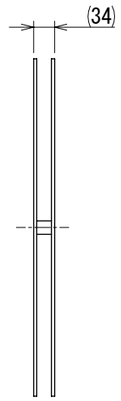


HRS DRAWING FOR REFERENCE

Notes 1 Applicable wire : AWG#24 to 28 (Insulation diameter : φ1.15 MAX)
2 Applicable crimp contact extraction tool : RP6-SC-TP (CL150-0039-0)
3 Per reel : 10,000 contacts

△3 CAD change

| NO. | MATERIAL | FINISH , REMARKS | NO. | MATERIAL | FINISH , REMARKS |
|---|---|---|---|---|---|
| 1 | Phosphor bronze | Contact portion : Gold plating 0.2μm min.<br>Underplating : Nickel plating 1μm min. | | | |

| UNITS | SCALE | | COUNT | DESCRIPTION OF REVISIONS | DESIGNED | CHECKED | DATE |
|---|---|---|---|---|---|---|---|
| mm | 5:1 | △3 | 1 | DIS-C-00018212 | TR.YAMANOUE | HY.KOBAYASHI | 2024.08.23 |

HIROSE ELECTRIC CO.,LTD.

| | | |
|---|---|---|
| APPROVED | TP.KOMATSU | 2022.05.17 |
| CHECKED | EJ.KUNII | 2022.05.17 |
| DESIGNED | SH.KOYAMA | 2022.05.17 |
| DRAWN | MK.WADA | 2022.05.17 |

| | |
|---|---|
| DRAWING NO. | EDC-396720-00-00 |
| PART NO. | HR22-SC1-221 |
| CODE NO. | CL0122-0095-0-00 |

△3 1/1