编码(Coding)：JK/JXD260528001

南京时恒电子科技有限公司

Nanjing Shiheng Electronics Co.,Ltd.

产品承认书

APPROVAL SHEET

客户名称 CUSTOMER：	
产品名称 PART NAME：	MF52 测温型 NTC 热敏电阻器 MF52 Series Temp Measurement NTC Thermistor
产品型号 PART NUMBER：	MF52A 103F3950(A1)
版次 REV.NO：	C0
日期 DATE：	2026-5-28

南京时恒电子科技有限公司
NANJING SHIHENG ELECTRONICS CO.,LTD.
地址：南京市江宁区湖熟镇金阳路 18 号
Address: No.18 Jinyang Road Hushu Town Jiangning District Nanjing China
邮编 Postcode：211121
TEL: 025-52121868
Http: //www.shiheng.com.cn E-MAIL: sales@shiheng.com.cn

变更登记表

REVISED RECORD SHEET

版次 REV. NO	变更日期 REV.DATE	变更内容 CHANGE CONTENT	申请人 APPLICANT	批准人 APPROVED
A0	2015/10/11	版本制定。 Version formulation.	鞠晓丽	李少媛
B0	2022/4/1	更新规格书版本格式，增加版次管控，细化规格纸。 Update for version form of data sheet, add to management and control for number of edition, refine to PN and draw.	吴迎丽	李少媛
C0	2025/12/01	更新规格书版本格式，去掉：产品图纸此一页的变更履历表。 Update for version form of data sheet, Remove: Change history table on this page of the product drawing.	刘星月	李少媛

1、产品型号说明 Product model specification

MF52	A	103	F	3950	(A1)
①	②	③	④	⑤	⑥

① MF52：测温型 NTC 热敏电阻器系列 (Series Temp Measurement NTC Thermistor)

② A：指引线为镀锡线 (Refers to tinned lead)

③ 103：25℃的零功率电阻值 10kΩ (Zero Power Resistance at 25℃is 10kΩ)

④ F：阻值精度代码 F-±1% G-±2% H-±3% J-±5% (Resistance precision code F-±1% G-±2% H-±3% J-±5%)

⑤ 3950：$B_{25/50}$ 值 3950K ($B_{25/50}$:3950K)

⑥ (A1)：线材规格：引线外径Φ0.3mm (Wire dimension: The outer diameter of lead wire is Φ0.3mm)


2、电气性能 Electrical Characteristics

No.	项目 Item	符号 Symbol	测试条件 Test conditions	单位 Unit	性能要求 Requirements
2.1	25℃的零功率电阻值 Zero Power Resistance at 25℃	R_{25}	Ta=25±0.5℃ (测试功率≤0.1mW 空气中测试) (Test Power≤0.1mW，in air)	kΩ	10kΩ±1%
2.2	B 值 B-value	$B_{25/50}$	$B=[(T_a\times T_b)/(T_b-T_a)]\times \ln(R_a/R_b)$ T_a=25±0.01℃ T_b=50±0.01℃	K	3950K±1%
2.5	耗散系数 Thermal dissipation Coefficient	δ	静止空气中 In still air	mW/℃	约 2
2.6	时间常数 Thermal time constant	τ	静止空气中 In still air	sec	约 12
2.8	绝缘电阻 Insulation resistance	/	100V/DC 1min	MΩ	≥100
2.9	工作温度范围 Operating temperature range	/	/	℃	-40~ 125
2.10	最大额定功率 Maximum rated power	Pmax	/	mW	50
2.11	阻温特性 R&T-table	/	/	/	见附表 I See attached table I
2.12	阻值误差&B 值误差 Resistance tolerance& B-value tolerance	/	/	/	见附表 II See attached table II

3、产品图纸 Product drawing

产品图纸 Product drawing		客户确认 Customer confirm	客户名称 Customer：			
			确认 Confirm		日期 DATE	
产品型号 MODEL NO.	MF52A 103F3950(A1)		审核 Approve:		日期 DATE	

尺寸 Dimensions： （Unit：mm）

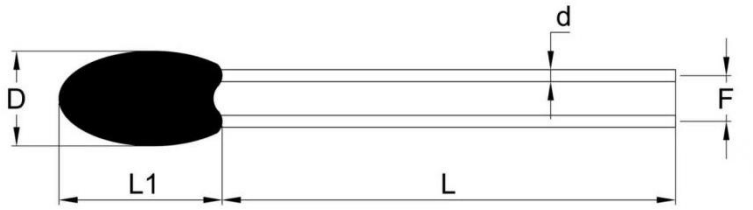

DMax	L1Max	LMin	d±0.05	F±0.5
2.5	4.0	25	0.3	1.7

技术要求 Technical requirements：

1) 零功率阻值：R_{25}：10kΩ±1% (Zero Power Resistance: R_{25}：10kΩ±1%)；
2) $B_{25/50}$ 数值：3950K±1% (B-value:$B_{25/50}$: 3950K±1%)；
3) 线材：φ0.3 镀锡铜包钢线 (Φ0.3 tinned copper-weld steel wire)；
4) 封装：黑色环氧树脂包封 (Black Epoxy)；
5) 符合 RoHS 环保要求 (Meet environmental protection requirements:RoHS)。

4、可靠性 Reliability

No.	项目 Test Item	试验标准 Test Standard	试验条件及方法 Test Conditions / Methods	性能要求 Acceptance Criteria
4.1	引出端强度 Terminal strength	IEC60068-2-21	固定电阻端，拉力：5±1 N，时间：10±1 秒 Fixed resistor end, Pull strength: 5±1 N, time: 10±1 sec	无可见性损伤 No obvious damage $\|\Delta R_{25}/R_{25}\|\leqslant 2\%$
4.2	可焊性 Solder ability	IEC60068-2-20	温度：245±5℃，时间：2-3 秒 temperature: 245±5℃, for 2-3 sec	着锡面积≥95% Coverage area≥95%
4.3	耐焊接热 Withstand weiling temp	IEC60068-2-20	锡锅温度：260±5℃，浸入深度距电阻体 6mm，时间 5±1 秒 Temperature of tin pot: 260±5℃, insert deepth from body of resistance 6mm, time 5±1 senconds	无可见性损伤 No obvious damage $\|\Delta R_{25}/R_{25}\|\leqslant 2\%$
4.4	稳态湿热 Steady humidity and heat	IEC60068-2-78	温度：40℃±2℃，湿度：93±2%，时间：500 小时 Temp: 40℃±2℃, humidity: 93±2%, Time: 500 hrs	无可见性损伤 No obvious damage $\|\Delta R_{25}/R_{25}\|\leqslant 2\%$
4.5	温度快速变化 Rapid changes in temperature	IEC60068-2-14	-55℃ 30min→25℃ 5min→125℃ 30min→25℃ 5min, 5 cycles	无可见性损伤 No obvious damage $\|\Delta R_{25}/R_{25}\|\leqslant 2\%$
4.6	高温储存 High temperature storage	IEC60068-2-2	温度：125℃±5℃ 时间：1000 小时 Temp: 125℃±5℃, Time: 1000 hrs	无可见性损伤 No obvious damage $\|\Delta R_{25}/R_{25}\|\leqslant 2\%$
4.7	低温储存 Low temperature storage	IEC60068-2-1	温度：-55℃，时间：1000 小时 Temp: -55℃, Time: 1000 hrs	无可见性损伤 No obvious damage $\|\Delta R_{25}/R_{25}\|\leqslant 2\%$


▲注： 1）稳态湿热及温度快速变化试验结束后，样品需在常温环境下静置 2 小时后再做性能测试；

▲Note：1）After the test of steady-state humid heat and rapid temperature change, the sample should be kept for 2 hours at room temperature before performance test；


2）高温存储结束后，需随测试环境自然恢复至常温，再取出做性能测试。

2）After the test of high-temperature storage is complete, and then take it out for performance test when the test environment naturally regain to normal temperature.

5、推荐波峰焊曲线 Recommended wave soldering profile

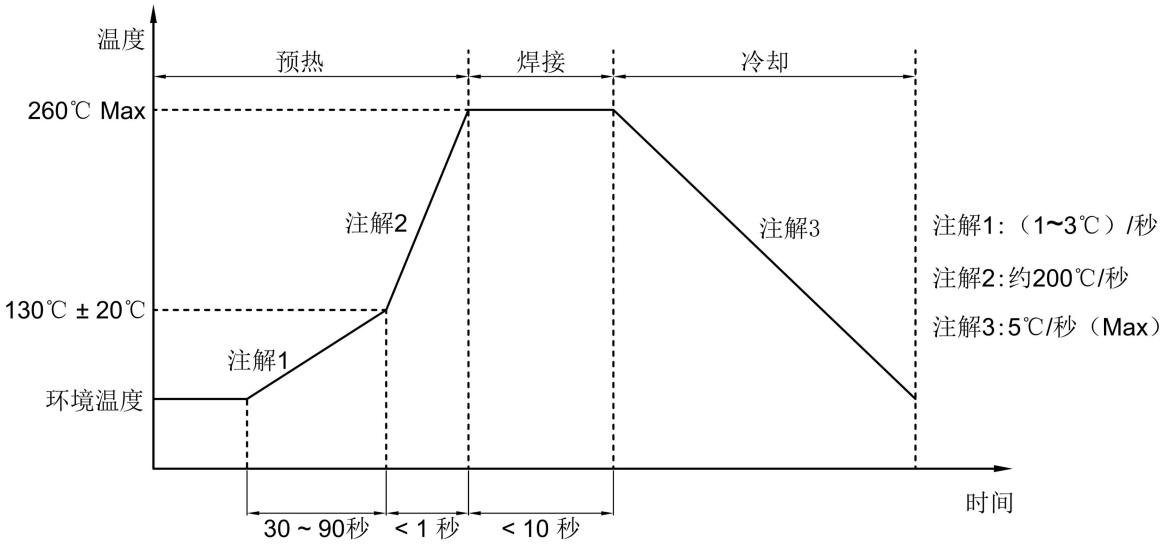

6、降功耗曲线 Power Derating Curve

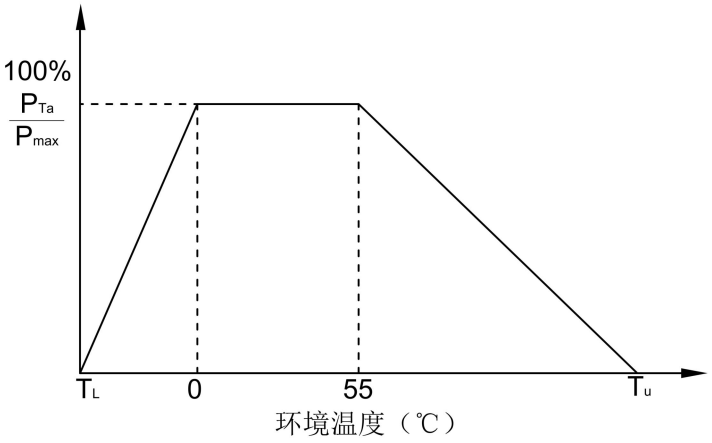

例如：
环境温度（T_a）=90℃
最大工作温度(T_u)=125℃
For example:
Ambient temperature（T_a）=90℃
Maximum operating temperature（T_u）=125℃

$$P_{Ta} = \frac{T_u - T_a}{T_u - 55} \times P_{max} = 50\%P_{max}$$

7、产品包装 Product packaging

7.1 包装方式 Packing Type

☑ 散装方式 Bulk Type　　☐编编带方式 Reel Type

7.2 包装规格 Packing specification

No.	包装规格 Packing specification	包装材料、尺寸 Packing material, size	产品数量 Quantity
1	包装袋 Packing bag	自封口袋(self sealing bag) W×H=11cm×12cm	
2	编编带包装盒 reel packing box	包装盒 packing box W×G×H=335mm×240mm×50mm	

8、安装&使用注意事项 Installation & Use precautions

8.1 本产品的用途：温度测量与控制；
Usage of this product: Temperature measurement and control；
8.2 避免过大的电流引起元件自身发热而产生测量误差；
To avoid of testing tolerance caused by huge current upon the self-heat of component；
8.3 烙铁焊接时，焊接处距包封头部距离至少 2mm，焊接温度应低于 360℃，焊接时间＜3ses；
When soldering by soldering iron, the distance between the welding place and the coating head should be at least 2mm, the welding temperature should be lower than 360℃, and the welding time should be less than 3sec;
8.4 储存温度：-10℃～40℃；储存湿度：≤75% RH；
Storage temperature: -10℃～40℃; storage humidity: ≤75% RH；
8.5 避免存放在具有腐蚀性气体及光照的环境下；
To avoid of leaving with such environment as corrosive gases and illumination；
8.6 包装打开后需重新密封保存，贮存期 1 年，超过贮存期，可按本标准规定的项目重新检验，如符合要求仍可使用；
The packing need to be resealed since opened, storage period 1 year once valid, it should be retest according to regulated of criterion and can be still used if meet the requirement；
8.7 如在加工过程中需使用热缩管，热缩管热缩时不可使用电吹风进行吹制，建议热缩工艺，将套好热缩管后的产品放入恒温烘箱中，按 110℃/10-12min 进行热缩；
If the heat shrinkable tube is used in the manufacturing process, do not use a hair dryer to shrink the tube. This is a recommended heat shrinkable process that puts the product covered shrinkable tube into a constant temperature oven, and shrink them at 110℃/10 ~ 12min；
8.8 对于 MF52A、B、C、D 等型号的测温型 NTC 热敏电阻器，其均为径向引出线结构，不得将其两引线拉成 180° 轴向使用；
For the MF52A, B, C, D Type NTC thermistors, they are all radial lead-out structure, shall not be used to pull its two leads into 180° axial；
8.9 芯片为陶瓷半导体，在使用过程中避免挤压或对环氧端头物理撞击，以免造成产品损伤。
The core chip of the product is a ceramic semiconductor. Avoid extrusion or physical impact on the epoxy end in the process of use, so as not to cause product damage。

8、产品认证 Product certification

No.	项目 Projects	产品认证 Product certification
8.1	质量管理体系认证 Quality Management System Certification	ISO9001:2015
		IATF16949：2016
8.2	环境管理体系认证 Environmental Management System Certification	ISO14001:2015
8.3	知识产权管理体系认证 Intellectual Property Management System Certification	GB/T29490-2013
8.4	环保检测报告 Environmental test report	RoHS 2.0
8.5	CQC 认证（CQC07001019009） CQC certificate（CQC07001019009）	
8.6	TUV 认证（R50245892） TUV certificate（R50245892）	
8.7	UL/cUL 认证（E240991） UL/cUL certificate（E240991）	

附表 I Attachment I

南京时恒阻温特性表 SHIHENG R-T Table

R_{25}=10kΩ 精度:±1% $B_{25/50}$=3950K 精度:±1% (P477-4B)


温度(℃)	电阻(kΩ)			电阻精度(%)		温度精度(℃)	
	最小值	中心值	最大值	△R	-△R	△T	-△T
-55	709.352	749.200	789.047	5.318	-5.318	0.721	-0.721
-54	662.784	699.508	736.232	5.249	-5.249	0.717	-0.717
-53	619.595	653.455	687.316	5.181	-5.181	0.714	-0.714
-52	579.499	610.733	641.966	5.114	-5.114	0.710	-0.710
-51	542.246	571.067	599.888	5.046	-5.046	0.706	-0.706
-50	507.611	534.215	560.819	4.980	-4.980	0.702	-0.702
-49	475.391	499.957	524.524	4.913	-4.913	0.698	-0.698
-48	445.403	468.095	490.787	4.847	-4.847	0.694	-0.694
-47	417.480	438.448	459.415	4.782	-4.782	0.690	-0.690
-46	391.470	410.851	430.232	4.717	-4.717	0.686	-0.686
-45	367.234	385.154	403.073	4.652	-4.652	0.682	-0.682
-44	344.643	361.217	377.791	4.588	-4.588	0.678	-0.678
-43	323.579	338.913	354.247	4.524	-4.524	0.674	-0.674
-42	303.931	318.123	332.315	4.461	-4.461	0.669	-0.669
-41	285.600	298.739	311.878	4.398	-4.398	0.665	-0.665
-40	268.491	280.660	292.828	4.335	-4.335	0.660	-0.660
-39	252.517	263.791	275.064	4.273	-4.273	0.656	-0.656
-38	237.598	248.046	258.494	4.212	-4.212	0.651	-0.651
-37	223.660	233.346	243.032	4.150	-4.150	0.647	-0.647
-36	210.632	219.615	228.598	4.090	-4.090	0.642	-0.642
-35	198.452	206.785	215.119	4.030	-4.030	0.637	-0.637
-34	187.058	194.792	202.525	3.970	-3.970	0.632	-0.632
-33	176.396	183.576	190.755	3.910	-3.910	0.627	-0.627
-32	166.415	173.082	179.749	3.851	-3.851	0.622	-0.622
-31	157.067	163.260	169.453	3.793	-3.793	0.617	-0.617
-30	148.307	154.062	159.817	3.735	-3.735	0.612	-0.612
-29	140.096	145.446	150.795	3.677	-3.677	0.607	-0.607
-28	132.395	137.369	142.343	3.620	-3.620	0.602	-0.602
-27	125.169	129.795	134.421	3.563	-3.563	0.596	-0.596
-26	118.386	122.689	126.993	3.507	-3.507	0.591	-0.591
-25	112.015	116.020	120.024	3.451	-3.451	0.586	-0.586
-24	106.028	109.756	113.483	3.396	-3.396	0.580	-0.580
-23	100.400	103.870	107.341	3.341	-3.341	0.574	-0.574
-22	95.106	98.338	101.570	3.286	-3.286	0.569	-0.569

-21	90.125	93.135	96.145	3.231	-3.231	0.563	-0.563
-20	85.434	88.238	91.043	3.177	-3.177	0.557	-0.557
-19	81.017	83.629	86.242	3.124	-3.124	0.551	-0.551
-18	76.853	79.288	81.723	3.070	-3.070	0.545	-0.545
-17	72.928	75.197	77.467	3.017	-3.017	0.539	-0.539
-16	69.226	71.341	73.456	2.965	-2.965	0.533	-0.533
-15	65.732	67.704	69.676	2.912	-2.912	0.527	-0.527
-14	62.433	64.272	66.111	2.860	-2.860	0.521	-0.521
-13	59.318	61.032	62.747	2.809	-2.809	0.514	-0.514
-12	56.374	57.972	59.571	2.757	-2.757	0.508	-0.508
-11	53.591	55.082	56.572	2.706	-2.706	0.502	-0.502
-10	50.959	52.350	53.740	2.655	-2.655	0.495	-0.495
-9	48.470	49.766	51.062	2.604	-2.604	0.488	-0.488
-8	46.113	47.322	48.531	2.554	-2.554	0.482	-0.482
-7	43.883	45.010	46.137	2.504	-2.504	0.475	-0.475
-6	41.770	42.821	43.872	2.454	-2.454	0.468	-0.468
-5	39.768	40.748	41.728	2.404	-2.404	0.461	-0.461
-4	37.871	38.785	39.699	2.355	-2.355	0.454	-0.454
-3	36.073	36.925	37.776	2.306	-2.306	0.447	-0.447
-2	34.368	35.161	35.955	2.257	-2.257	0.440	-0.440
-1	32.750	33.489	34.229	2.208	-2.208	0.433	-0.433
0	31.356	32.049	32.743	2.164	-2.164	0.425	-0.425
1	29.757	30.399	31.041	2.111	-2.111	0.419	-0.419
2	28.374	28.972	29.570	2.063	-2.063	0.411	-0.411
3	27.060	27.617	28.174	2.015	-2.015	0.404	-0.404
4	25.812	26.330	26.849	1.968	-1.968	0.396	-0.396
5	24.627	25.109	25.591	1.920	-1.920	0.389	-0.389
6	23.500	23.948	24.397	1.873	-1.873	0.381	-0.381
7	22.429	22.846	23.263	1.826	-1.826	0.373	-0.373
8	21.410	21.798	22.186	1.779	-1.779	0.366	-0.366
9	20.442	20.802	21.163	1.732	-1.732	0.358	-0.358
10	19.521	19.856	20.190	1.685	-1.685	0.350	-0.350
11	18.644	18.955	19.266	1.639	-1.639	0.342	-0.342
12	17.811	18.099	18.388	1.593	-1.593	0.333	-0.333
13	17.017	17.285	17.552	1.547	-1.547	0.325	-0.325
14	16.262	16.510	16.758	1.501	-1.501	0.317	-0.317
15	15.543	15.773	16.002	1.455	-1.455	0.308	-0.308
16	14.858	15.071	15.284	1.410	-1.410	0.300	-0.300
17	14.207	14.403	14.600	1.364	-1.364	0.291	-0.291
18	13.586	13.767	13.949	1.319	-1.319	0.282	-0.282

19	12.994	13.162	13.330	1.274	-1.274	0.272	-0.272
20	12.431	12.585	12.740	1.229	-1.229	0.262	-0.262
21	11.894	12.036	12.179	1.185	-1.185	0.252	-0.252
22	11.382	11.513	11.645	1.140	-1.140	0.240	-0.240
23	10.894	11.015	11.136	1.096	-1.096	0.225	-0.225
24	10.429	10.540	10.651	1.052	-1.052	0.199	-0.199
25	9.900	10.000	10.100	1.000	-1.000	0.190	-0.190
26	9.556	9.656	9.756	1.034	-1.034	0.297	-0.297
27	9.145	9.245	9.345	1.078	-1.078	0.276	-0.276
28	8.754	8.853	8.953	1.121	-1.121	0.279	-0.279
29	8.381	8.479	8.578	1.164	-1.164	0.286	-0.286
30	8.025	8.123	8.221	1.207	-1.207	0.295	-0.295
31	7.686	7.783	7.880	1.250	-1.250	0.305	-0.305
32	7.362	7.459	7.555	1.293	-1.293	0.316	-0.316
33	7.054	7.149	7.245	1.335	-1.335	0.327	-0.327
34	6.760	6.854	6.949	1.377	-1.377	0.338	-0.338
35	6.479	6.573	6.666	1.419	-1.419	0.349	-0.349
36	6.212	6.304	6.396	1.461	-1.461	0.361	-0.361
37	5.956	6.047	6.138	1.502	-1.502	0.373	-0.373
38	5.712	5.802	5.892	1.544	-1.544	0.384	-0.384
39	5.480	5.568	5.656	1.585	-1.585	0.396	-0.396
40	5.258	5.345	5.432	1.626	-1.626	0.409	-0.409
41	5.046	5.131	5.217	1.667	-1.667	0.421	-0.421
42	4.843	4.927	5.011	1.707	-1.707	0.433	-0.433
43	4.650	4.733	4.815	1.748	-1.748	0.446	-0.446
44	4.465	4.546	4.628	1.788	-1.788	0.458	-0.458
45	4.289	4.368	4.448	1.828	-1.828	0.471	-0.471
46	4.120	4.198	4.277	1.867	-1.867	0.483	-0.483
47	3.959	4.036	4.113	1.907	-1.907	0.496	-0.496
48	3.805	3.880	3.956	1.946	-1.946	0.509	-0.509
49	3.658	3.732	3.806	1.985	-1.985	0.522	-0.522
50	3.517	3.590	3.662	2.024	-2.024	0.535	-0.535
51	3.382	3.453	3.525	2.063	-2.063	0.548	-0.548
52	3.253	3.323	3.393	2.101	-2.101	0.561	-0.561
53	3.130	3.199	3.267	2.139	-2.139	0.575	-0.575
54	3.012	3.079	3.147	2.177	-2.177	0.588	-0.588
55	2.900	2.965	3.031	2.215	-2.215	0.601	-0.601
56	2.792	2.856	2.920	2.253	-2.253	0.615	-0.615
57	2.688	2.751	2.814	2.290	-2.290	0.628	-0.628
58	2.589	2.651	2.713	2.327	-2.327	0.642	-0.642

59	2.494	2.555	2.615	2.364	-2.364	0.656	-0.656
60	2.404	2.463	2.522	2.401	-2.401	0.670	-0.670
61	2.317	2.375	2.432	2.437	-2.437	0.684	-0.684
62	2.233	2.290	2.347	2.473	-2.473	0.698	-0.698
63	2.153	2.209	2.264	2.510	-2.510	0.712	-0.712
64	2.077	2.131	2.185	2.545	-2.545	0.726	-0.726
65	2.003	2.056	2.110	2.581	-2.581	0.740	-0.740
66	1.933	1.985	2.037	2.616	-2.616	0.754	-0.754
67	1.865	1.916	1.967	2.652	-2.652	0.769	-0.769
68	1.800	1.850	1.900	2.687	-2.687	0.783	-0.783
69	1.738	1.787	1.836	2.722	-2.722	0.798	-0.798
70	1.679	1.726	1.774	2.756	-2.756	0.812	-0.812
71	1.621	1.668	1.714	2.791	-2.791	0.827	-0.827
72	1.566	1.612	1.657	2.825	-2.825	0.842	-0.842
73	1.513	1.558	1.602	2.859	-2.859	0.857	-0.857
74	1.462	1.506	1.550	2.893	-2.893	0.872	-0.872
75	1.414	1.456	1.499	2.926	-2.926	0.887	-0.887
76	1.367	1.408	1.450	2.960	-2.960	0.902	-0.902
77	1.322	1.362	1.403	2.993	-2.993	0.917	-0.917
78	1.278	1.318	1.358	3.026	-3.026	0.932	-0.932
79	1.237	1.276	1.315	3.059	-3.059	0.947	-0.947
80	1.196	1.235	1.273	3.091	-3.091	0.963	-0.963
81	1.158	1.195	1.233	3.124	-3.124	0.978	-0.978
82	1.121	1.157	1.194	3.156	-3.156	0.993	-0.993
83	1.085	1.121	1.156	3.188	-3.188	1.009	-1.009
84	1.050	1.085	1.120	3.220	-3.220	1.025	-1.025
85	1.017	1.052	1.086	3.252	-3.252	1.040	-1.040
86	0.985	1.019	1.052	3.283	-3.283	1.056	-1.056
87	0.955	0.987	1.020	3.315	-3.315	1.072	-1.072
88	0.925	0.957	0.989	3.346	-3.346	1.088	-1.088
89	0.896	0.928	0.959	3.377	-3.377	1.104	-1.104
90	0.869	0.899	0.930	3.408	-3.408	1.120	-1.120
91	0.842	0.872	0.902	3.439	-3.439	1.136	-1.136
92	0.816	0.846	0.875	3.469	-3.469	1.153	-1.153
93	0.792	0.820	0.849	3.500	-3.500	1.169	-1.169
94	0.768	0.796	0.824	3.530	-3.530	1.185	-1.185
95	0.745	0.772	0.800	3.560	-3.560	1.202	-1.202
96	0.723	0.749	0.776	3.590	-3.590	1.218	-1.218
97	0.701	0.727	0.754	3.620	-3.620	1.235	-1.235
98	0.680	0.706	0.732	3.650	-3.650	1.251	-1.251

99	0.660	0.685	0.711	3.680	-3.680	1.268	-1.268
100	0.641	0.666	0.690	3.709	-3.709	1.285	-1.285
101	0.622	0.646	0.670	3.739	-3.739	1.302	-1.302
102	0.604	0.628	0.651	3.768	-3.768	1.319	-1.319
103	0.586	0.610	0.633	3.797	-3.797	1.336	-1.336
104	0.569	0.592	0.615	3.826	-3.826	1.353	-1.353
105	0.553	0.575	0.597	3.855	-3.855	1.370	-1.370
106	0.537	0.559	0.581	3.884	-3.884	1.387	-1.387
107	0.522	0.543	0.564	3.912	-3.912	1.404	-1.404
108	0.507	0.528	0.549	3.941	-3.941	1.422	-1.422
109	0.493	0.513	0.533	3.969	-3.969	1.439	-1.439
110	0.479	0.499	0.519	3.998	-3.998	1.457	-1.457
111	0.465	0.485	0.504	4.026	-4.026	1.474	-1.474
112	0.452	0.471	0.490	4.054	-4.054	1.492	-1.492
113	0.439	0.458	0.477	4.083	-4.083	1.509	-1.509
114	0.427	0.445	0.464	4.111	-4.111	1.527	-1.527
115	0.415	0.433	0.451	4.139	-4.139	1.545	-1.545
116	0.404	0.421	0.439	4.167	-4.167	1.563	-1.563
117	0.392	0.410	0.427	4.194	-4.194	1.581	-1.581
118	0.382	0.398	0.415	4.222	-4.222	1.599	-1.599
119	0.371	0.388	0.404	4.250	-4.250	1.617	-1.617
120	0.361	0.377	0.393	4.278	-4.278	1.635	-1.635
121	0.351	0.367	0.383	4.305	-4.305	1.653	-1.653
122	0.341	0.357	0.372	4.333	-4.333	1.671	-1.671
123	0.332	0.347	0.362	4.360	-4.360	1.690	-1.690
124	0.323	0.338	0.352	4.388	-4.388	1.708	-1.708
125	0.314	0.329	0.343	4.415	-4.415	1.727	-1.727

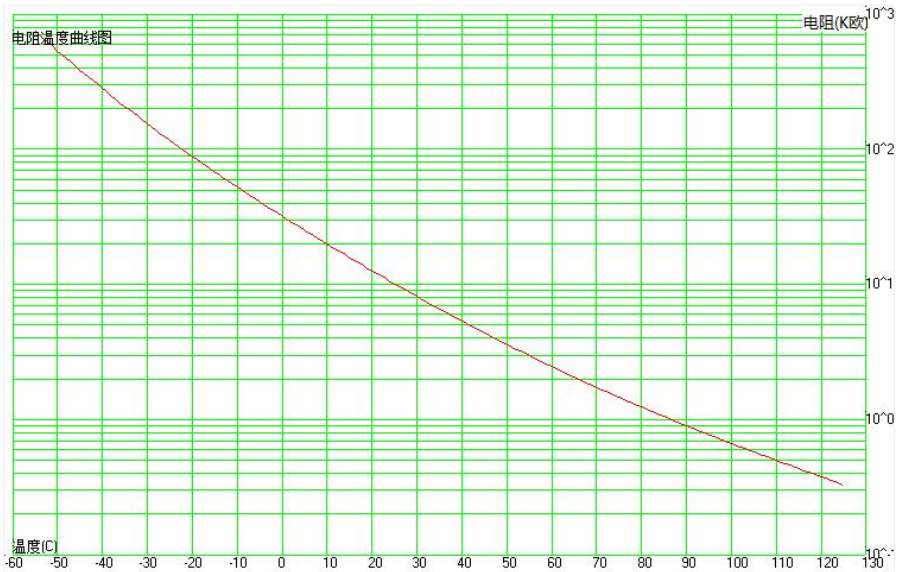

附表 II Attachment II

