



www.dzyjzj.com Tel:0755-27575531 Fax:0755-27576267

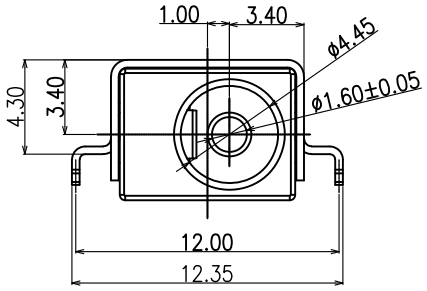





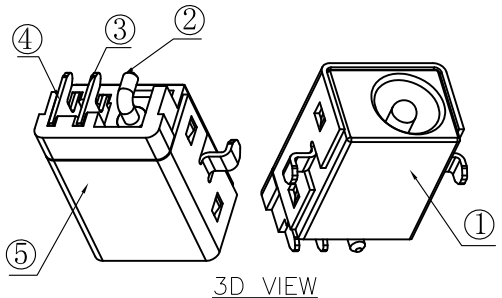


3D VIEW

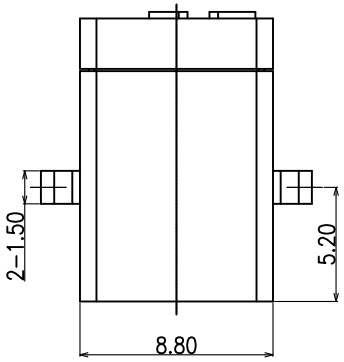

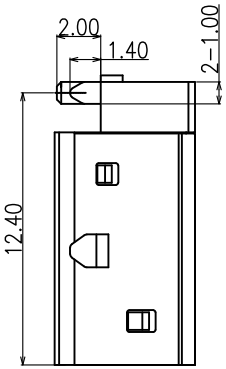


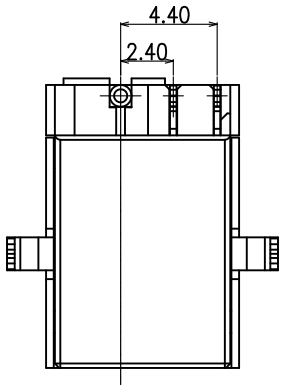

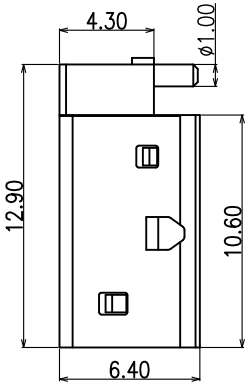


SPECIFICATIONS:


1. ELECTRICAL CHARACTERISTICS:
   - 1-1. RATING: 24V 3A
   - 1-2. CONTACT RESISTANCE: 50mΩ MAX.(INITIAL)
   - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
   - 1-4. INSULATION RESISTANCE: 100MΩ MIN.
2. MECHANICAL CHARACTERISTICS:
   - 2-1. INSERTION FORCE : 7~30 N
   - 2-2. WITHDRAWAL FORCE : 7~30 N
3. LIFE TEST: 5,000 CYCLES MIN.

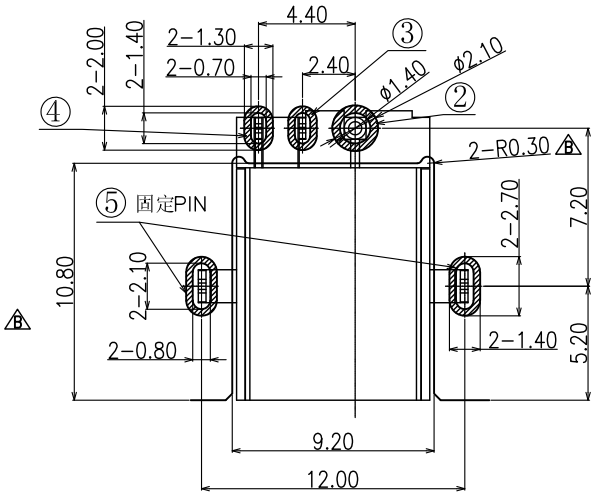

P.C.B LAYOUT TOP VIEW

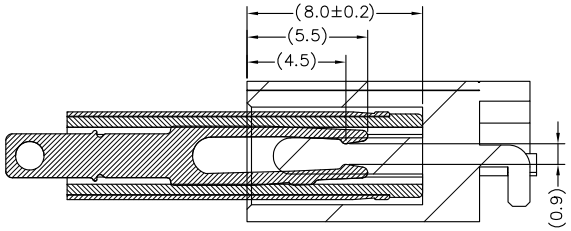

Plug insertion diagram



SCHEMATIC

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
5	TERMINAL	1	COPPER ALLOY;; THE BOTTOM OF THE NICKEL; THE WHOLE SILVER PLATING.	T=0.20mm
4	TERMINAL	1	COPPER ALLOY;; THE BOTTOM OF THE NICKEL; THE WHOLE SILVER PLATING.	T=0.30mm
3	TERMINAL	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE SILVER PLATING.	T=0.35mm
2	TERMINAL	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE SILVER PLATING.	
1	HOUSING	1	HIGHT TEMPERATURE PLASTIC COLOR BLACK	

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-023D
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCW-DC023D-160B
UNIT: mm [inch]			MOLD NO.
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2610150953
SCALE:1:1	SIZE: A4		SHEET NO. 1 OF 1