WG9435C

Features:

- ☐ Advanced Trench Technology.
- ☐ Excellent Switching Characteristics.
- ☐ Extended Safe Operating Area.
- ☐ Unrivalled Gate Charge :Qg= 11nC (Typ.).
- ☐ BVDSS=-30V,I_D=-5.1A
- ☐ R_{DS}(on) : 44mΩ (Typ.) @V_G=10V
- ☐ 100% Avalanche Tested

SOP-8

RoHS COMPLIANT





1. Gate (G)
2. Drain (D)
3. Source (S)

Schematic diagram

Absolute Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Symbol	Parameter		Value	Units
V_{DS}	Drain-to-Source Voltage		-30	V
V_{GS}	Gate-to-Source Voltage		±20	V
I_D	Continuous Drain Current	T_A = 25°C	-5.1	A
		T_A = 100°C	-3.2	
I_{DM}	Pulsed Drain Current (1)		-20	A
E_{AS}	Single Pulsed Avalanche Energy (2)		12	mJ
P_D	Power Dissipation	T_A = 25°C	1.4	W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient(3)		89	°C/W
T_J, T_{STG}	Junction & Storage Temperature Range		-55 to 150	°C

WildGoose Semiconductor

Electrical Characteristics (T_J = 25°C unless otherwise specified)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Off Characteristics						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	I_D = -250μA, V_{GS} = 0V	-30	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = -30V, V_{GS} = 0V	-	-	-1.0	μA
I_{GSS}	Gate-Body Leakage Current	V_{DS} = 0V, V_{GS} = ±20V	-	-	±100	nA
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = -250μA	-1.0	-1.6	-2.5	V
$R_{DS(ON)}$	Static Drain-Source ON-Resistance(4)	V_{GS} = -10V, I_D = -5A	-	44	45.5	mΩ
		V_{GS} = -4.5V, I_D =-4.5A	-	60	65	mΩ
Dynamic Characteristics						
C_{iss}	Input Capacitance	V_{GS} = 0V, V_{DS} = -15V, f = 1MHz	-	540	-	pF
C_{oss}	Output Capacitance		-	75	-	pF
C_{rss}	Reverse Transfer Capacitance		-	57	-	pF
Q_g	Total Gate Charge	V_{GS} = 0 to -10V V_{DS} = -15V, I_D = -2A	-	11	-	nC
Q_{gs}	Gate Source Charge		-	2	-	nC
Q_{gd}	Gate Drain("Miller") Charge		-	2	-	nC
Switching Characteristics						
$t_{d(on)}$	Turn-On DelayTime	V_{GS} = -10V, V_{DD} = -15V I_D= -2A, R_{GEN} = 3Ω	-	3	-	ns
t_r	Turn-On Rise Time		-	2	-	ns
$t_{d(off)}$	Turn-Off DelayTime		-	26	-	ns
t_f	Turn-Off Fall Time		-	15	-	ns
Drain-Source Diode Characteristics and Max Ratings						
I_S	Maximum Continuous Drain to Source Diode Forward Current		-	-	-5.1	A
I_{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	-20	A
V_{SD}	Drain to Source Diode Forward Voltage	V_{GS} = 0V, I_S = -5.1A	-	-	-1.2	V
trr	Body Diode Reverse Recovery Time	I_F = -2A, di/dt = 100A/us	-	9	-	ns
Qrr	Body Diode Reverse Recovery Charge		-	3	-	nC

Notes:

1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature.
2. EAS condition: Starting T_J=25C, V_{DD}=-15V, V_G=-10V, R_G=25ohm, L=0.5mH, I_{AS}=-7A
3. $R_{\theta JA}$ is measured with the device mounted on a 1inch^2 pad of 2oz copper FR4 PCB
4. Pulse Test: Pulse Width≤300μs, Duty Cycle≤0.5%.

WildGoose Semiconductor

Typical Performance Characteristics

Figure 1: Output Characteristics

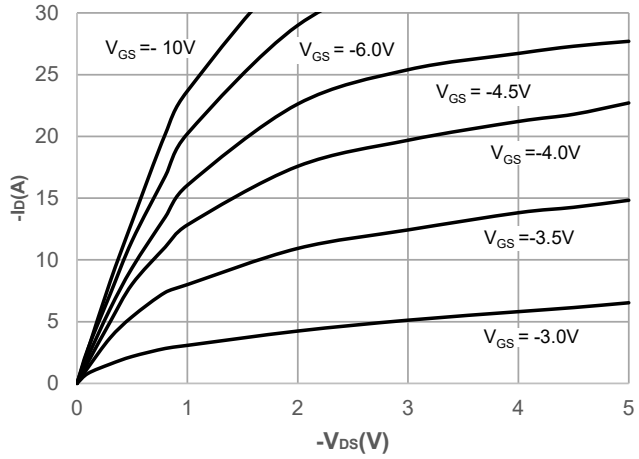

Figure 2: Typical Transfer Characteristics

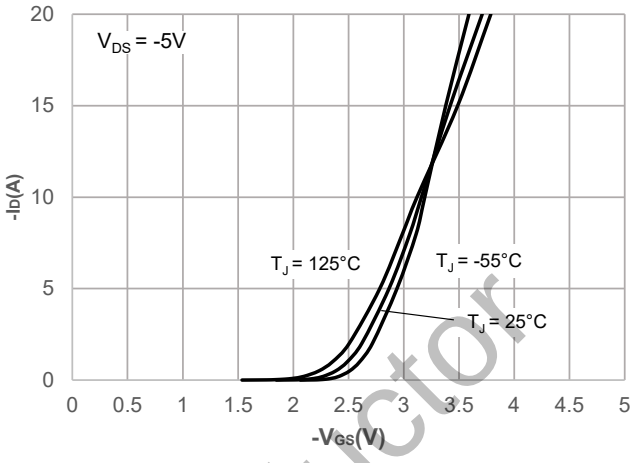

Figure 3: On-resistance vs. Drain Current

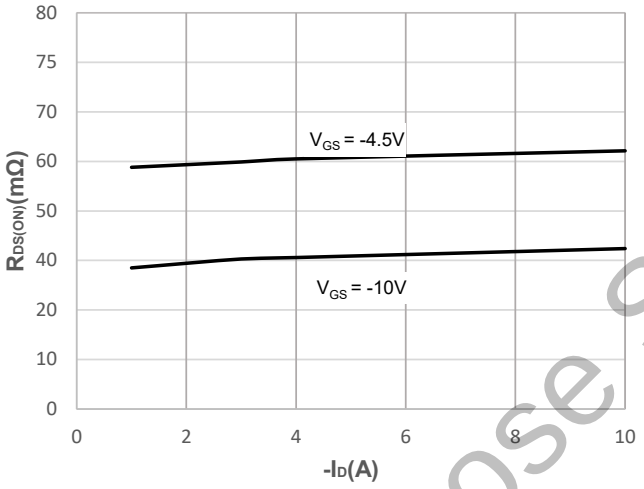

Figure 4: Body Diode Characteristics

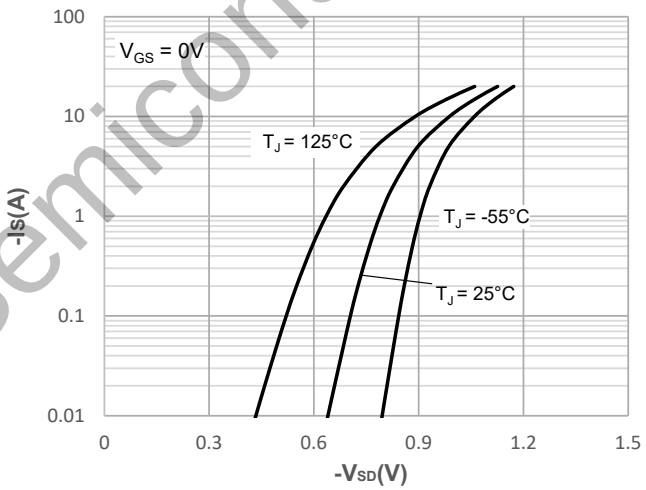

Figure 5: Gate Charge Characteristics

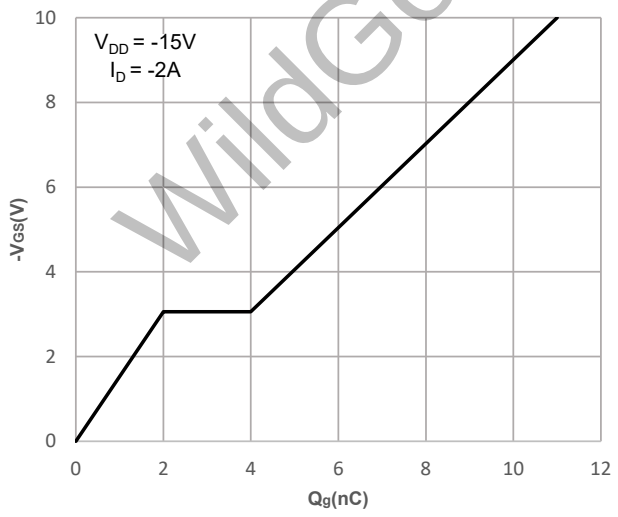

Figure 6: Capacitance Characteristics

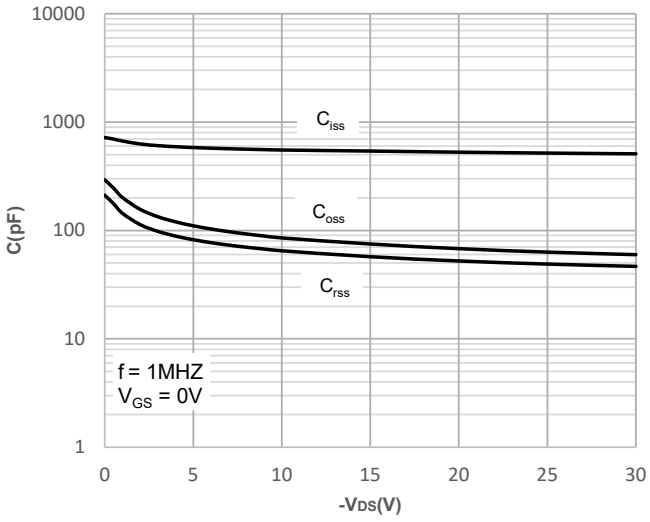

WildGoose Semiconductor

Typical Performance Characteristics

Figure 7: Normalized Breakdown voltage vs. Junction Temperature

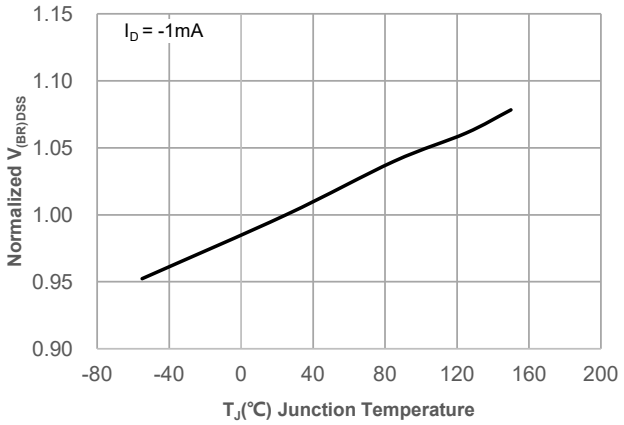

Figure 8: Normalized on Resistance vs. Junction Temperature

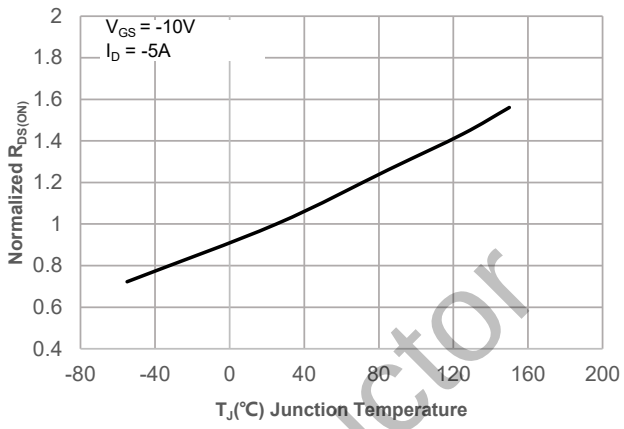

Figure 9: Maximum Safe Operating Area

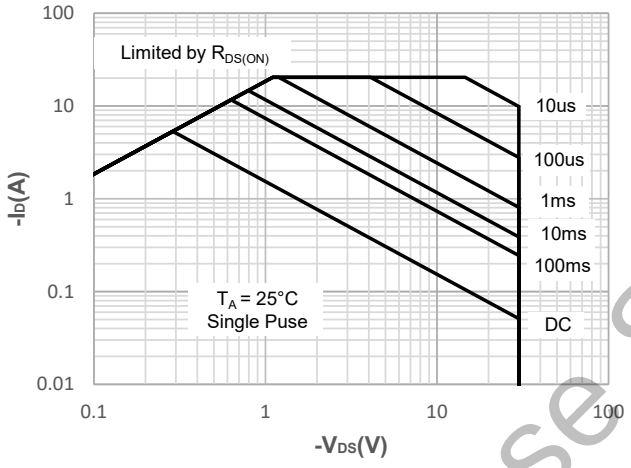

Figure 10: Maximum Continuous Drian Current vs. Ambient Temperature

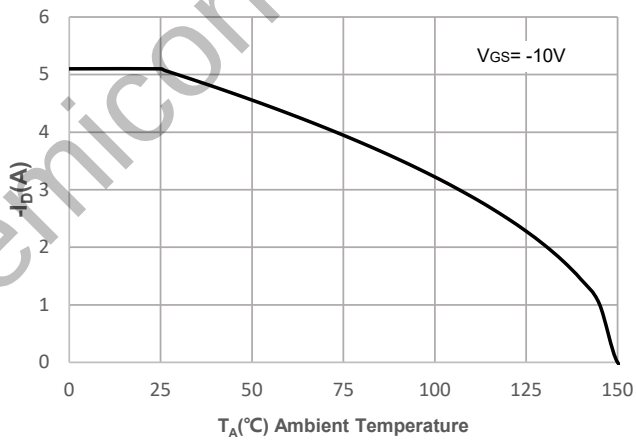

Figure 11: Normalized Maximum Transient Thermal Impedance

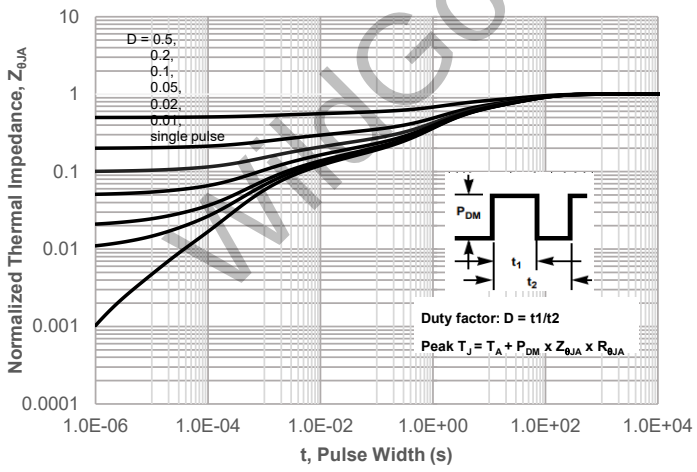

Figure 12: Peak Current Capacity

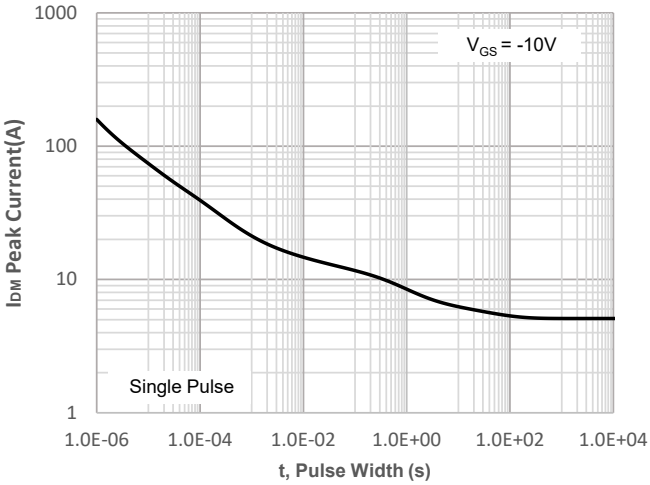

WildGoose Semiconductor

Test Circuit

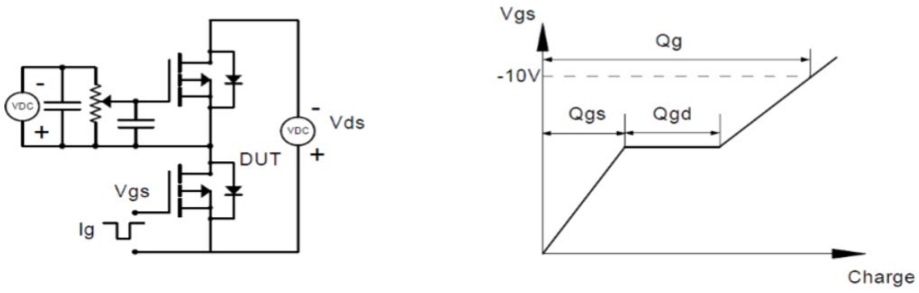

Figure 1: Gate Charge Test Circuit & Waveform

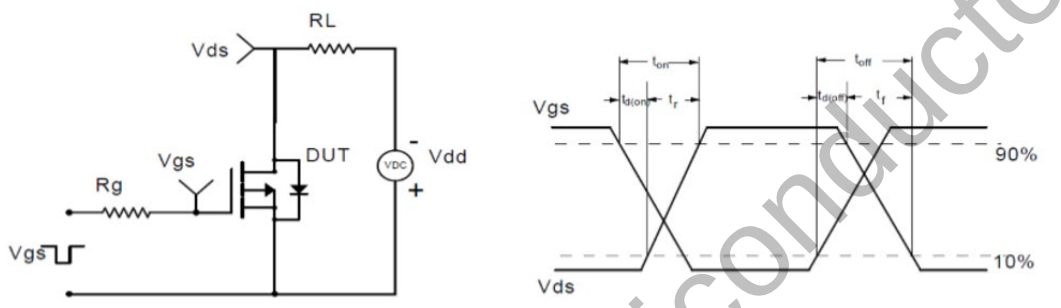

Figure 2: Resistive Switching Test Circuit & Waveform

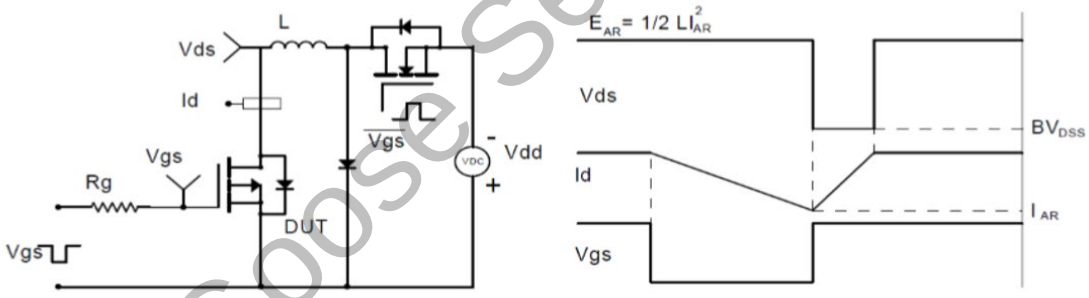

Figure 3: Unclamped Inductive Switching Test Circuit& Waveform

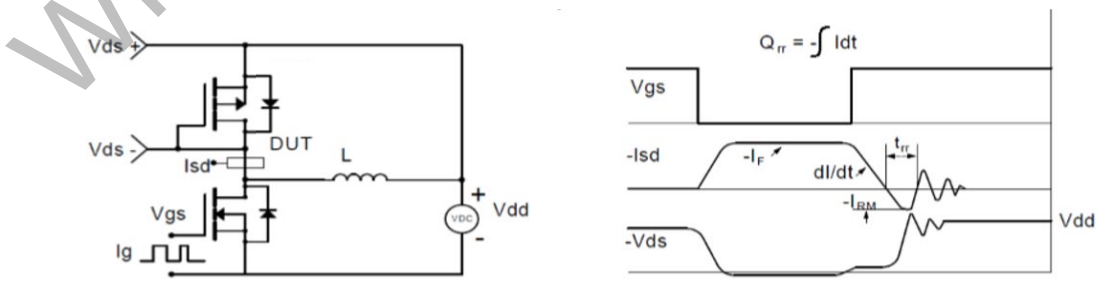

Figure 4: Diode Recovery Test Circuit & Waveform

WildGoose Semiconductor

Package Dimension

SOP-8

Unit: mm

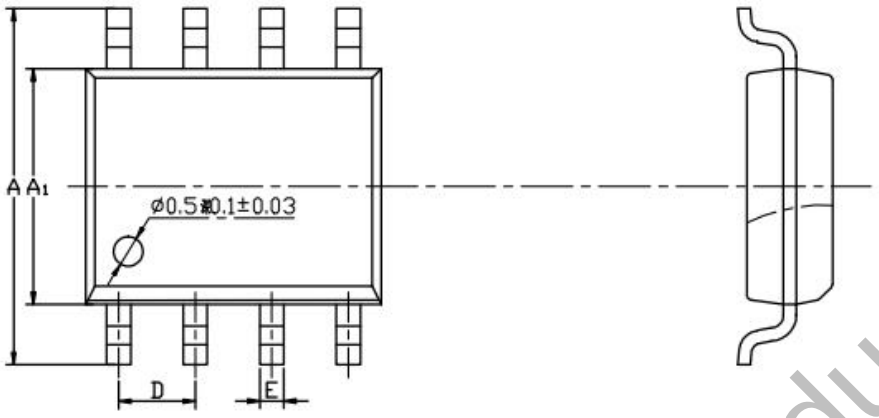

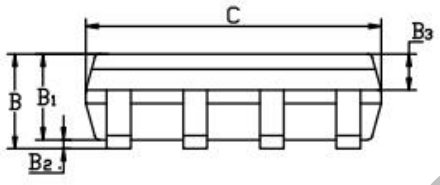

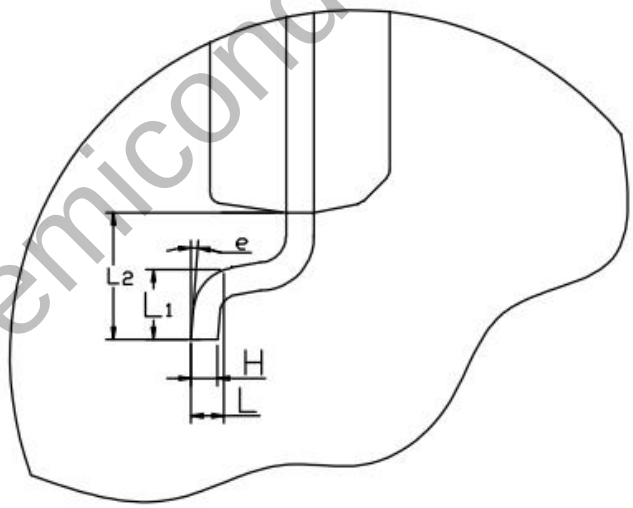

尺寸数据：			单位：mm	
标注	Min	Nom	Max	备注
A	5.80	6.00	6.20	跨度
A1	3.70	3.90	4.10	
B	1.50	1.60	1.75	
B1	1.30	1.40	1.50	
B2	0.05	0.125	0.2	站高
B3	0.60	0.70	0.75	
C	4.75	4.85	5.05	
D	1.27BSC			
E	0.39	0.44	0.49	
H	0.10	0.20	0.25	
L	0.25BSC			
L1	0.40	0.6	0.8	
L2	0.95	1.05	1.20	脚长
e	0	4°	8°	

WildGoose Semiconductor