
SOP-8


RoHS COMPLIANT



WGM13V40

Features:

- ☐ High power and current handing capability
- ☐ Lead free product is acquired
- ☐ Surface mount package
- ☐ Unrivalled Gate Charge :Qg= 32.5 nC (Typ.).
- ☐ BVDSS=40V,I_D=9A
- ☐ R_{DS}(on) :13mΩ (Typ) @V_G=10V
- ☐ 100% Avalanche Tested

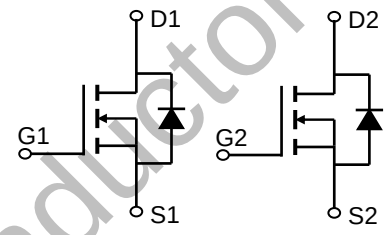

Schematic Diagram

WildGoose Semiconductor

Absolute Maximum Ratings (T_C=25℃unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	40	V
Gate-Source Voltage	V_{GS}	±20	V
Drain Current-Continuous	I_D	9	A
Drain Current-Continuous(T_C=100℃)	I_D (100℃)	6.4	A
Pulsed Drain Current	I_{DM}	40	A
Maximum Power Dissipation	P_D	2	W
Operating Junction and Storage Temperature Range	T_J,T_{STG}	-55 To 150	℃

Thermal Characteristic

Thermal Resistance,Junction-to-Ambient (Note 2)	$R_{\theta JA}$	62.5	℃/W

N-CH Electrical Characteristics (T_A=25℃unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V I_D=250μA	40	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=40V,V_{GS}=0V	-	-	1	μA
Gate-Body Leakage Current	I_{GSS}	V_{GS}=±20V,V_{DS}=0V	-	-	±100	nA
On Characteristics (Note 3)						
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}=V_{GS},I_D=250μA	1	1.5	2.0	V
Drain-Source On-State Resistance	$R_{DS(ON)}$	V_{GS}=10V, I_D=8A	-	13	16	mΩ
		V_{GS}=4.5V, I_D=4A	-	18.9	24	mΩ
Forward Transconductance	g_{FS}	V_{DS}=5V,I_D=8A	33	-	-	S
Dynamic Characteristics (Note4)						
Input Capacitance	C_{lss}	V_{DS}=20V,V_{GS}=0V, F=1.0MHz	-	964	-	PF
Output Capacitance	C_{oss}		-	109	-	PF
Reverse Transfer Capacitance	C_{rss}		-	96	-	PF
Switching Characteristics (Note 4)						
Turn-on Delay Time	$t_{d(on)}$	V_{DD}=20V, R_L=2.5Ω V_{GS}=10V,R_{GEN}=3Ω	-	5.5	-	nS
Turn-on Rise Time	t_r		-	14	-	nS
Turn-Off Delay Time	$t_{d(off)}$		-	24	-	nS
Turn-Off Fall Time	t_f		-	12	-	nS
Total Gate Charge	Q_g	V_{DS}=20V,I_D=8A, V_{GS}=10V	-	22.9	-	nC
Gate-Source Charge	Q_{gs}		-	3.5	-	nC
Gate-Drain Charge	Q_{gd}		-	5.3	-	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage (Note 3)	V_{SD}	V_{GS}=0V,I_S=9A	-	0.8	1.2	V

WildGoose Semiconductor

N- Channel Typical Electrical and Thermal Characteristics (Curves)

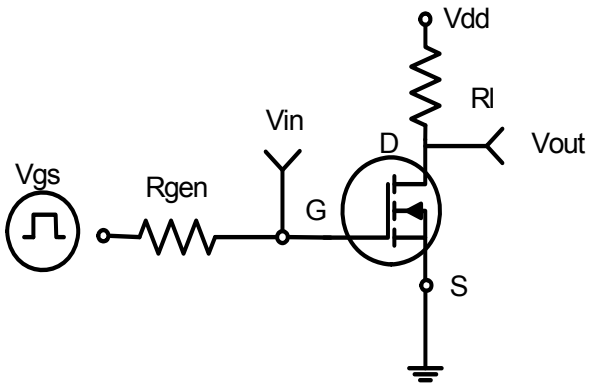


Figure 1:Switching Test Circuit

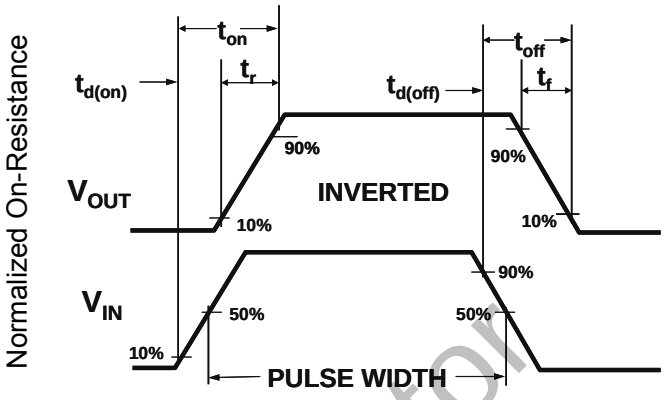


Figure 2:Switching Waveforms

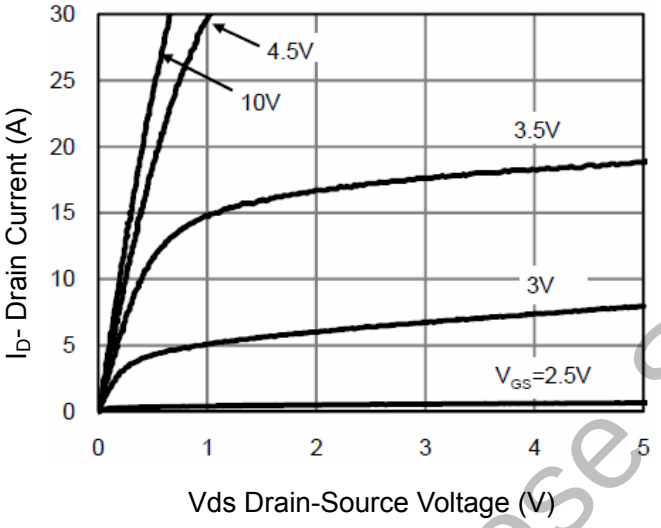


Figure 3 Output Characteristics

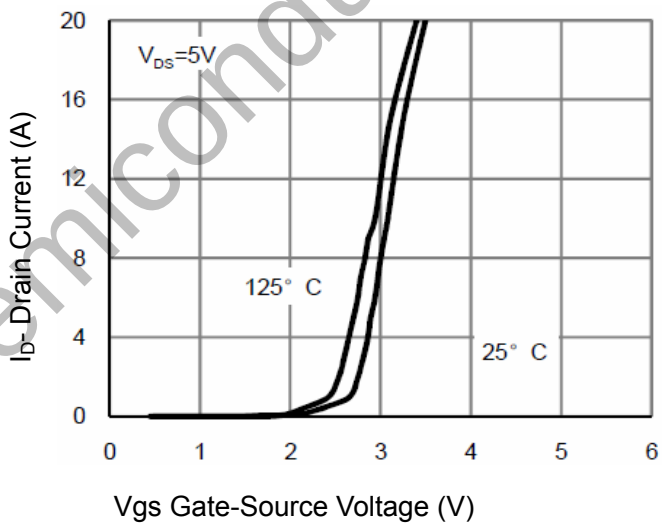


Figure 4 Transfer Characteristics

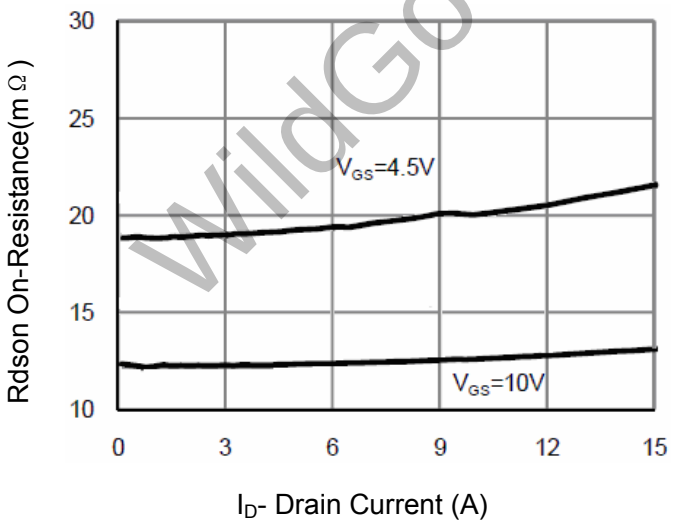


Figure 5 Drain-Source On-Resistance

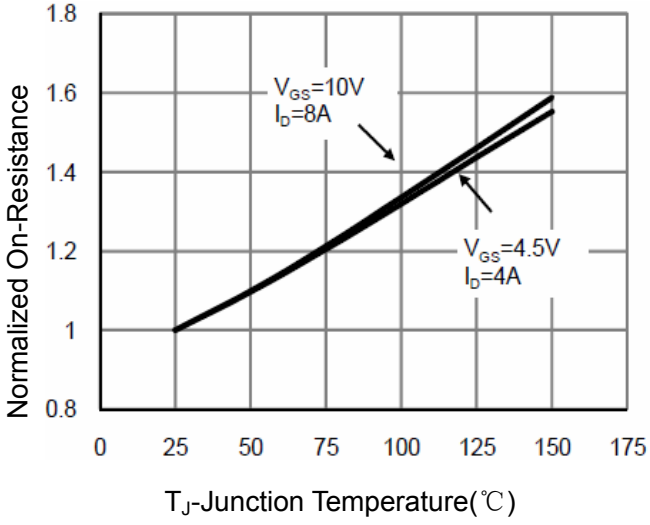


Figure 6 Drain-Source On-Resistance

WildGoose Semiconductor

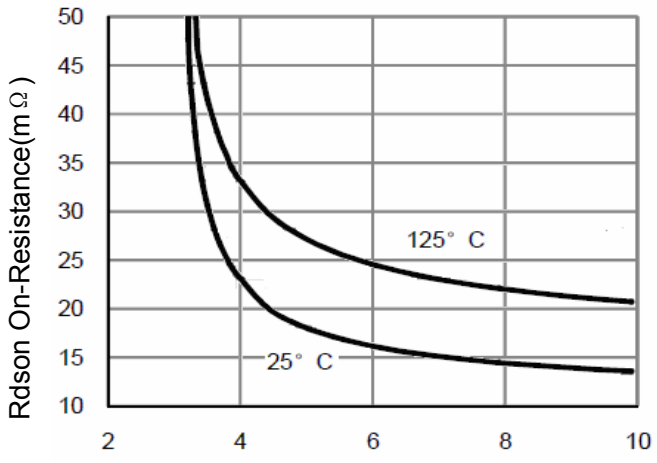


Figure7 Rdson vs Vgs

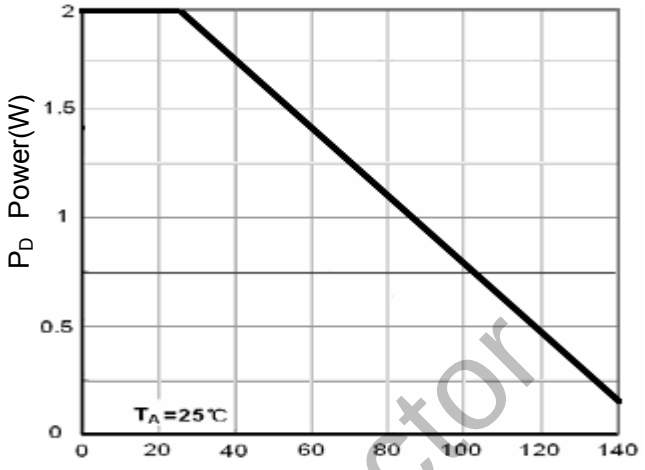


Figure 8 Power Dissipation

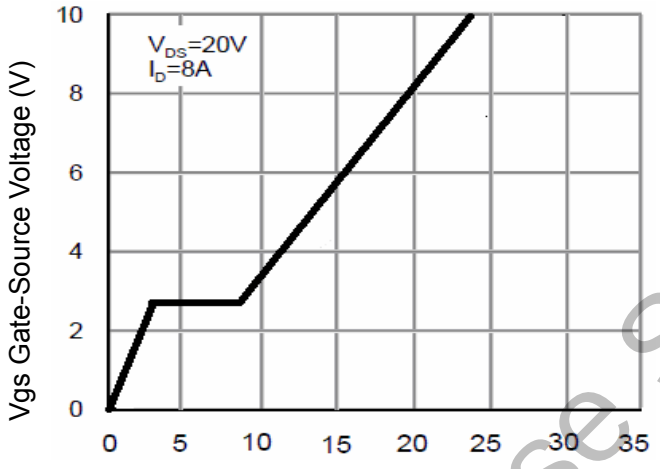


Figure 9 Gate Charge

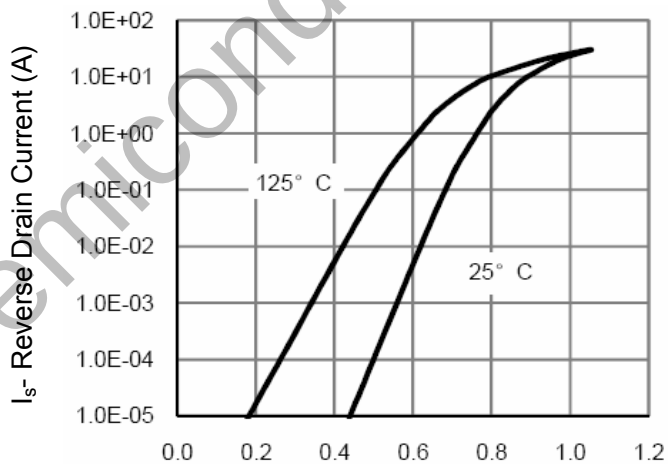


Figure 10 Source- Drain Diode Forward

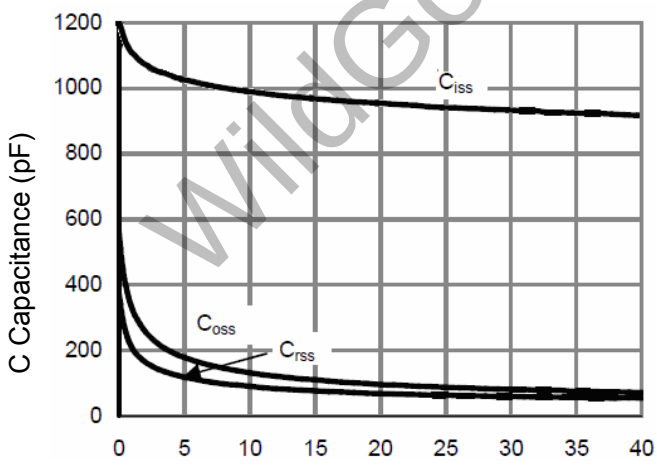


Figure 11 Capacitance vs Vds

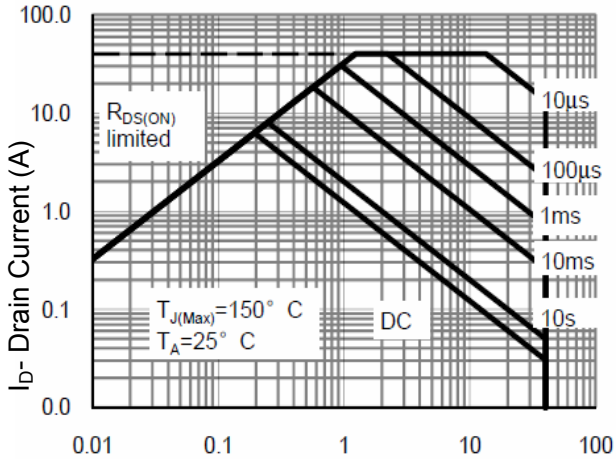


Figure 12 Safe Operation Area

WildGoose Semiconductor

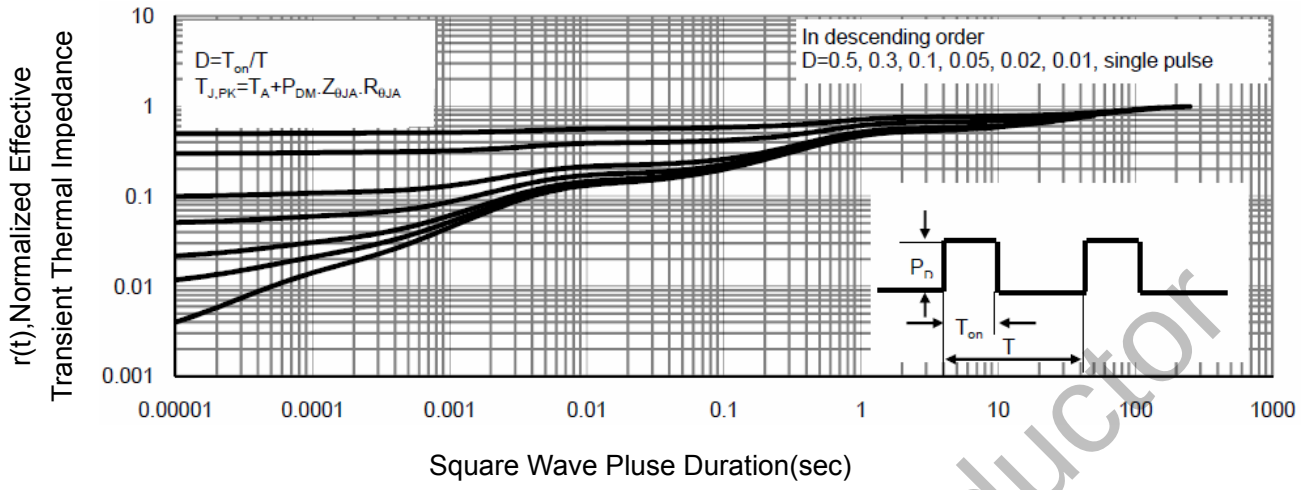



Figure 13 Normalized Maximum Transient Thermal Impedance


WildGoose Semiconductor


Package Dimension

SOP-8

Unit: mm

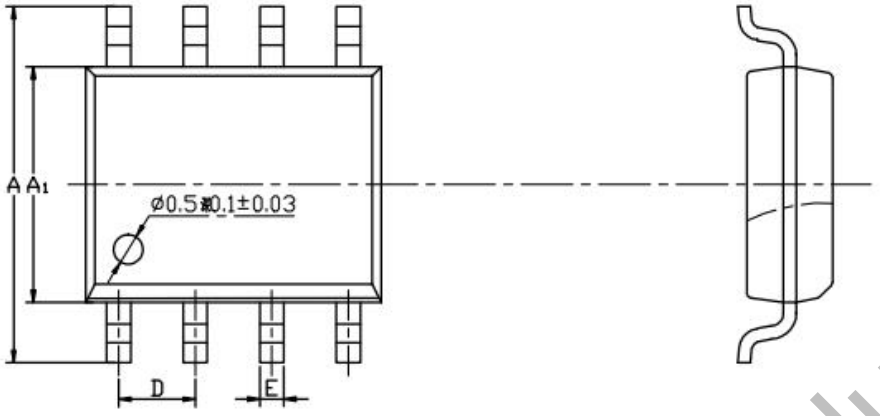

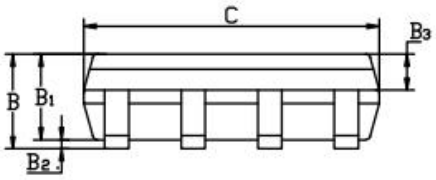

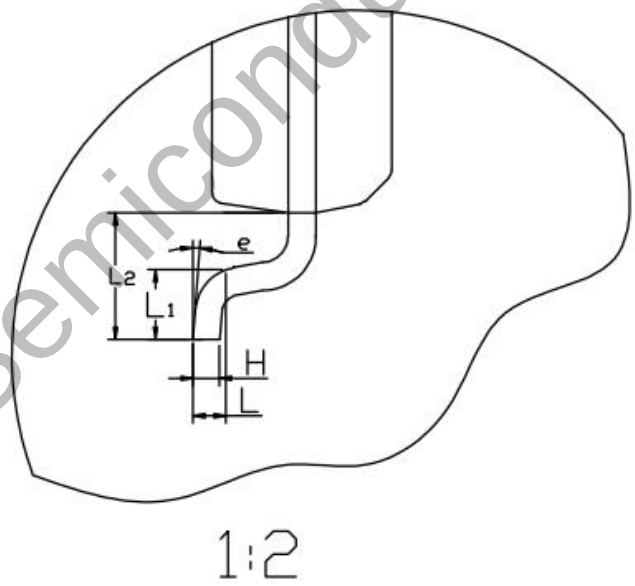

尺寸数据：			单位：mm	
标注	Min	Nom	Max	备注
A	5.80	6.00	6.20	跨度
A1	3.70	3.90	4.10	
B	1.50	1.60	1.75	
B1	1.30	1.40	1.50	
B2	0.05	0.125	0.2	站高
B3	0.60	0.70	0.75	
C	4.75	4.85	5.05	
D	1.27BSC			
E	0.39	0.44	0.49	
H	0.10	0.20	0.25	
L	0.25BSC			
L1	0.40	0.6	0.8	
L2	0.95	1.05	1.20	脚长
e	0	4°	8°	

WildGoose Semiconductor