集电通
JDT FUSE
为 您 的 产 品 保 驾 护 航

PRODUCT DATASHEET

NTC Devices

MF52A103F3950 (J1) NTC Devices

Electrical Characteristics

Item	Symbol	Conditions	Requirements
Rated zero-power resistance	R_{25}	Ta=25±0.5°C, (Test Power≤0.1mW， in air)	10kΩ±1%
B-value	$B_{25/50}$	B=[(Ta×Tb)/(Tb-Ta)]×ln(Ra/Rb)	3950K±1%
Thermal dissipationCoefficient	δ	Ta=25±0.01°C Tb=50±0.01°C	2 mW/°C
Thermal time constant	τ	In still air	8s
Operating temperature range	/	In still air	-30 to 105 ℃
Maximum rated power	P_{max}	/	10 mW

Physical Dimensions(mm.)

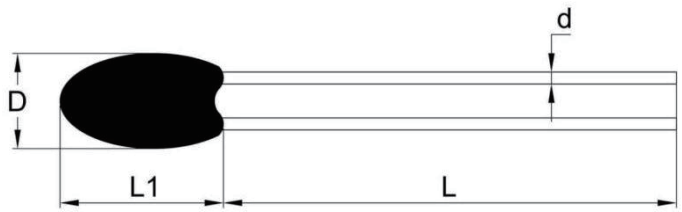

Dmax	L1max	L	d
3.0	4.5	23.5±2	0.3±0.05

Material List

N0	Material name	Specification
1	chip	10K 3950
2	Epoxy	FC505A/FC505B
3	Wire	φ0.3 CP

Reliability

Item	Testing method	Performance
Thermal Shock	Temperature：－40℃，＋80℃; Cycle：100，30min/cyc	｜△R25/ R25｜≤5% ｜△B/ B｜≤2%
High temperatureand high humidity	Temperature：40±2℃ 95% RH*1000HRS;	｜△R25/ R25｜≤5% ｜△B/ B｜≤5%
Low temperature storage	Temperature：：－40±2℃; Time：1000±24 h	｜△R25/ R25｜≤5% ｜△B/ B｜≤2%

Packaging Quantity

Model	Packing Type	Bag QTY
MF52A103F3950 (J1)	Bulk Type	500

Recommended wave soldering profile

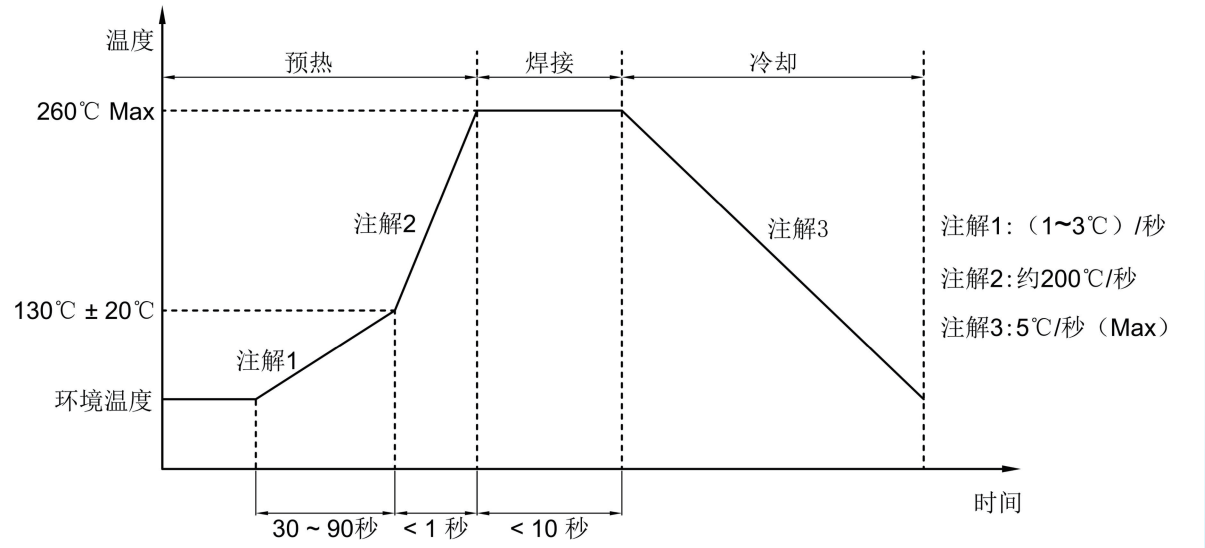

Application Notice

1. Usage of this product: Temperature measurement and control;
2. To avoid of testing tolerance caused by huge current upon the self-heat of component;
3. When soldering by soldering iron, the distance between the welding place and the coating head should be atleast 2mm, the welding temperature should be lower than 360℃, and the welding time should be less than 3sec;
4.Storage temperature: -10℃～ 40℃; storage humidity: ≤75% RH;
5.To avoid of leaving with such environment as corrosive gases and illumination;
6.The packing need to be resealed since opened, storage period 1 year once valid, it should be retest accordingto regulated of criterion and can be still used if meet the requirement;
7.If the heat shrinkable tube is used in the manufacturing process, do not use a hair dryer to shrink the tube. This is a recommended heat shrinkable process that puts the product covered shrinkable tube into a constant temperature oven, and shrink them at 110℃/10 ~ 12min;
8.For the MF52A, B, C, D Type NTC thermistors, they are all radial lead-out structure, shall not be used to pull itstwo leads into 180°axial;
9.The core chip of the product is a ceramic semiconductor. Avoid extrusion or physical impact on the epoxy endin the process of use, so as not to cause product damage。

R-T Table

Temp (℃)	Resistance (KΩ)		
	Max	Center	Min
-40	359.5644	343.6326	328.3739
-39	335.9504	321.2809	307.2213
-38	314.0464	300.5339	287.5741
-37	293.7175	281.2660	269.3154
-36	274.8405	263.3624	252.3384
-35	257.3023	246.7177	236.5449
-34	240.9996	231.2355	221.8447
-33	225.8377	216.8273	208.1555
-32	211.7294	203.4118	195.4013
-31	198.5951	190.9144	183.5124
-30	186.3613	179.2666	172.4247
-29	174.9608	168.4053	162.0793
-28	164.3317	158.2726	152.4218
-27	154.4170	148.8151	143.4022
-26	145.1643	139.9837	134.9746

R-T Table

Temp (℃)	Resistance (KΩ)		
	Max	Center	Min
-25	136.5254	131.7332	127.0964
-24	128.4558	124.0216	119.7285
-23	120.9146	116.8107	112.8348
-22	113.8640	110.0648	106.3818
-21	107.2691	103.7512	100.3387
-20	101.0977	97.8396	94.6771
-19	95.3201	92.3020	89.3705
-18	89.9088	87.1124	84.3946
-17	84.8385	82.2471	79.7268
-16	80.0856	77.6837	75.3463
-15	75.6284	73.4018	71.2336
-14	71.4468	69.3823	67.3708
-13	67.5220	65.6077	63.7412
-12	63.8370	62.0616	60.3295
-11	60.3755	58.7288	57.1212
-10	57.1228	55.5953	54.1032
-9	54.0651	52.6480	51.2629
-8	51.1895	49.8747	48.5889
-7	48.4842	47.2643	46.0705
-6	45.9381	44.8062	43.6978
-5	43.5409	42.4906	41.4615
-4	41.2831	40.3086	39.3531
-3	39.1559	38.2516	37.3644
-2	37.1508	36.3117	35.4880
-1	35.2603	34.4817	33.7169
0	33.4771	32.7547	32.0447
1	31.7945	31.1243	30.4652
2	30.2064	29.5847	28.9728
3	28.7068	28.1301	27.5623
4	27.2904	26.7556	26.2286
5	25.9521	25.4562	24.9672
6	24.6872	24.2274	23.7738
7	23.4912	23.0650	22.6443

R-T Table

Temp (C)	Resistance (KΩ)		
	Max	Center	Min
8	22.3599	21.9650	21.5750
9	21.2897	20.9239	20.5622
10	20.2768	19.9380	19.6028
11	19.3178	19.0041	18.6937
12	18.4096	18.1193	17.8318
13	17.5493	17.2807	17.0146
14	16.7340	16.4857	16.2394
15	15.9612	15.7317	15.5040
16	15.2284	15.0164	14.8059
17	14.5333	14.3376	14.1432
18	13.8738	13.6933	13.5139
19	13.2479	13.0816	12.9160
20	12.6537	12.5005	12.3479
21	12.0895	11.9485	11.8080
22	11.5535	11.4239	11.2946
23	11.0442	10.9252	10.8064
24	10.5602	10.4510	10.3419
25	10.1000	10.0000	9.9000
26	9.6709	9.5709	9.4710
27	9.2623	9.1626	9.0630
28	8.8732	8.7738	8.6747
29	8.5025	8.4037	8.3052
30	8.1494	8.0512	7.9534
31	7.8128	7.7154	7.6184
32	7.4919	7.3953	7.2993
33	7.1859	7.0903	6.9953
34	6.8940	6.7995	6.7056
35	6.6156	6.5221	6.4294
36	6.3498	6.2576	6.1660
37	6.0962	6.0051	5.9148
38	5.8540	5.7642	5.6752
39	5.6227	5.5342	5.4465
40	5.4018	5.3146	5.2283
41	5.1907	5.1049	5.0199
42	4.9890	4.9045	4.8210

R-T Table

Temp (℃)	Resistance (KΩ)		
	Max	Center	Min
43	4.7961	4.7130	4.6309
44	4.6117	4.5300	4.4494
45	4.4354	4.3551	4.2759
46	4.2667	4.1878	4.1100
47	4.1053	4.0278	3.9515
48	3.9508	3.8748	3.7999
49	3.8030	3.7283	3.6548
50	3.6614	3.5882	3.5161
51	3.5258	3.4540	3.3833
52	3.3960	3.3255	3.2562
53	3.2715	3.2025	3.1346
54	3.1523	3.0846	3.0181
55	3.0380	2.9717	2.9065
56	2.9285	2.8635	2.7996
57	2.8234	2.7597	2.6972
58	2.7227	2.6603	2.5990
59	2.6260	2.5649	2.5049
60	2.5333	2.4734	2.4147
61	2.4443	2.3856	2.3282
62	2.3589	2.3014	2.2452
63	2.2768	2.2206	2.1656
64	2.1981	2.1431	2.0892
65	2.1224	2.0686	2.0159
66	2.0498	1.9970	1.9455
67	1.9800	1.9283	1.8779
68	1.9129	1.8623	1.8130
69	1.8484	1.7989	1.7507
70	1.7864	1.7380	1.6908
71	1.7267	1.6794	1.6332
72	1.6694	1.6231	1.5779
73	1.6142	1.5689	1.5247
74	1.5612	1.5168	1.4736
75	1.5101	1.4667	1.4245
76	1.4610	1.4185	1.3772
77	1.4137	1.3722	1.3317

R-T Table

Temp (C)	Resistance (KΩ)		
	Max	Center	Min
78	1.3681	1.3275	1.2880
79	1.3243	1.2845	1.2458
80	1.2820	1.2431	1.2053
81	1.2413	1.2033	1.1663
82	1.2021	1.1649	1.1287
83	1.1644	1.1279	1.0926
84	1.1279	1.0923	1.0577
85	1.0928	1.0580	1.0241
86	1.0590	1.0249	0.9918
87	1.0264	0.9930	0.9606
88	0.9949	0.9623	0.9306
89	0.9646	0.9326	0.9016
90	0.9353	0.9040	0.8737
91	0.9070	0.8764	0.8468
92	0.8797	0.8498	0.8208
93	0.8534	0.8241	0.7958
94	0.8280	0.7994	0.7716
95	0.8035	0.7754	0.7483
96	0.7798	0.7523	0.7258
97	0.7569	0.7300	0.7041
98	0.7348	0.7085	0.6831
99	0.7134	0.6877	0.6628
100	0.6928	0.6676	0.6433
101	0.6728	0.6482	0.6244
102	0.6536	0.6295	0.6062
103	0.6349	0.6113	0.5885
104	0.6169	0.5938	0.5715
105	0.5995	0.5769	0.5550

Part Number System

MF52 A 103 F 3950 (J 1)

- 1:The outer diameter of lead wire is Φ0.3mm
- J:JDT
- 3950: $B_{25/50}$:3950K
- F: Resistance precision code F-±1% G-±2% H-±3% J-±5%
- 103: Zero Power Resistance at 25℃ is 10kΩ
- A:Refers to tinned lead
- MF52:Series Temp Measurement NTC Thermistor