

RAST | RAST 5 IDC Connectors

TE Internal #: 9-2232044-3 PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles



Connector System: Wire-to-Board

Number of Positions: **3**

Number of Rows: 1

Centerline (Pitch): 5 mm [.197 in]

PCB Mount Orientation: Vertical

Features

Connectivity

Product Type Features

Connector System	Wire-to-Board			
Header Type	Fully Shrouded			
Sealable	No			
Connector & Contact Terminates To	Printed Circuit Board			
PCB Connector Assembly Type	PCB Mount Header			
Configuration Features				
Number of Columns	3			
Number of Positions	3			
Number of Rows	1			
PCB Mount Orientation	Vertical			
Electrical Characteristics				
Operating Voltage	250 VAC			
Body Features				
Primary Product Color	Natural			

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



Contact Features

Contact Mating Area Length	8.5 mm[.33 in]
PCB Contact Termination Area Plating Material Thickness	1 μm[39.37 μin]
Contact Layout	Inline
Mating Tab Width	6.3 mm[.248 in]
Mating Tab Thickness	.8 mm[.032 in]
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Mating Area Plating Material Thickness	1 μm[39.37 μin]
PCB Contact Termination Area Plating Material Finish	Bright
Contact Shape & Form	Rectangular
Contact Mating Area Plating Material Finish	Bright
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Silver
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Silver
Contact Type	Tab
Contact Current Rating (Max)	20 A



Termination Features

Square Termination Post & Tail Dimension	.8 mm[.032 in]			
Termination Post & Tail Length	3.5 mm[.138 in]			
Termination Method to Printed Circuit Board	Through Hole - Solder			
Mechanical Attachment				
PCB Mount Alignment Type	Polarizing Pegs			
Mating Alignment Type	Keyed, Polarization			
Mating Retention	With			
Mating Retention Type	Latch			
Connector Mounting Type	Board Mount			
Mating Alignment	With			
PCB Mount Alignment	With			
PCB Mount Retention	Without			
Housing Features				
Housing Material	Nylon			

PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



Centerline (Pitch)	5 mm[.197 in]
Dimensions	
Connector Length	17.3 mm[.68 in]
Connector Height	12.8 mm[.503 in]
Connector Width	14.9 mm[.58 in]
PCB Thickness (Recommended)	1.5 mm[.06 in]
Usage Conditions	
Operating Temperature Range	-40 - 120 °C[-40 - 248 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
Agency/Standard	UL, VDE
Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	250
Packaging Type	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant Compliant	
EU ELV Directive 2000/53/EC		
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not reviewed for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent

PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors




chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts







Also in the Series | RAST 5 IDC Connectors

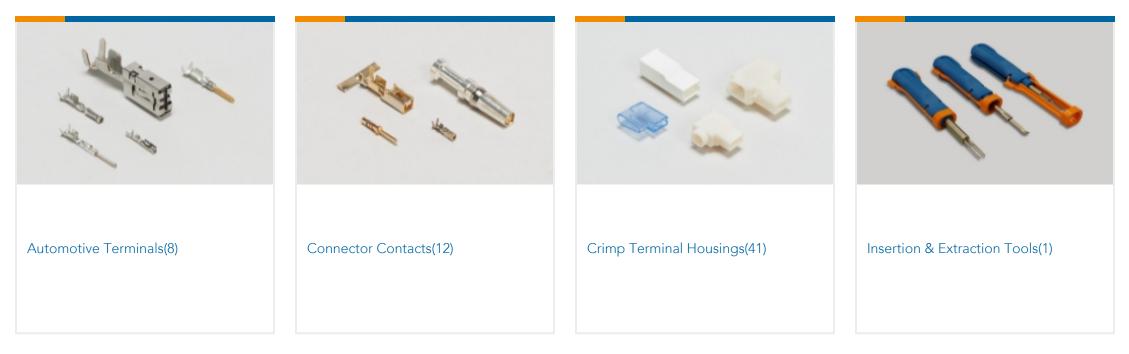


PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



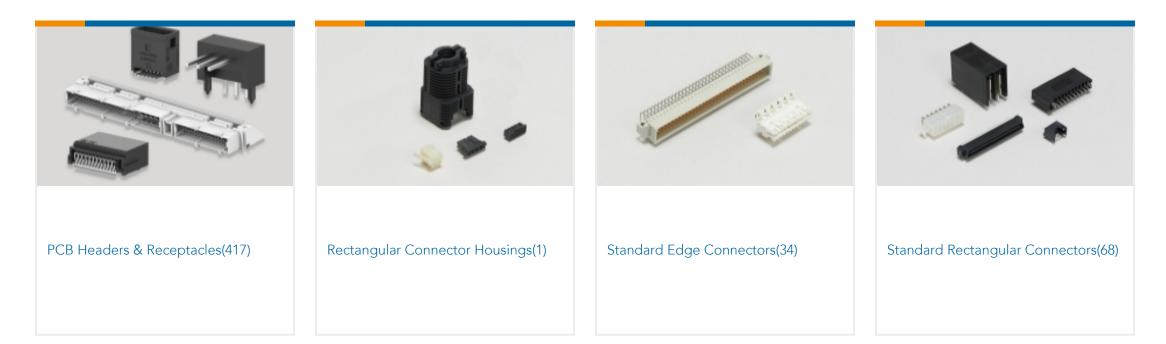

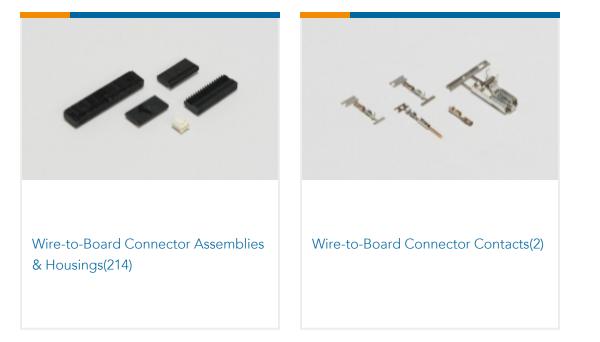

Customers Also Bought

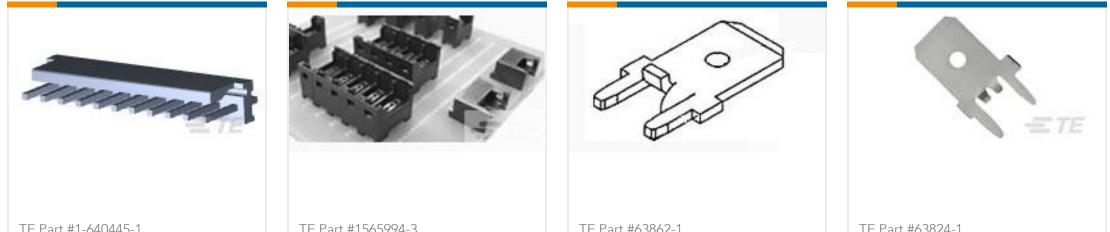

TE Part #1-640445-1 11P MTA156 HDR ASSY FL/STR SN	TE Part #1565994-3 RITS HDR ASSY R/A SMT TYPE 3P WITH BOSS	TE Part #63862-1 250 FASTON TAB TPBR	TE Part #63824-1 250 FASTON TAB TPBR
Str.			
TE Part #61795-3 RING 18-14 AWG TPBR	TE Part #1-1744037-2 12P EC PWR.200 CL HDR ASSY VRT	TE Part #1742303-1 250 FASTON,PCB TAB,TNBR	TE Part #63951-4 250 FASTON TAB TPBR



Documents

PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



Product Drawings 3P, RAST 5 Tab Header, THV English **CAD** Files 3D PDF 3D **Customer View Model** ENG_CVM_CVM_9-2232044-3_A_c-9-2232044-3-a.2d_dxf.zip English Customer View Model ENG_CVM_CVM_9-2232044-3_A_c-9-2232044-3-a.3d_igs.zip English Customer View Model ENG_CVM_CVM_9-2232044-3_A_c-9-2232044-3-a.3d_stp.zip English By downloading the CAD file I accept and agree to the **Terms and Conditions** of use **Product Specifications Product Specification**

English

Agency Approvals VDE Certificate

English