



Connectors > PCB Connectors > PCB Headers & Receptacles



Connector System: **Wire-to-Board**
Number of Positions: **10**
Number of Rows: **1**
Centerline (Pitch): **3.96 mm [.156 in]**
PCB Mount Orientation: **Right Angle**

Features

Product Type Features

Connector System	Wire-to-Board
Header Type	Partially Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header

Configuration Features

Connector Contact Load Condition	Fully Loaded
Number of Positions	10
Number of Rows	1
PCB Mount Orientation	Right Angle

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Body Features

Connector Profile	Low
-------------------	-----



Primary Product Color	White
-----------------------	-------

Contact Features

Contact Mating Area Length	8.6 mm[.33 in]
Mating Square Post Dimension	1.14 mm[.045 in]
PCB Contact Termination Area Plating Material Thickness	2.03 µm[80 µin]
Contact Layout	Inline
Contact Mating Area Plating Material Thickness	2.03 µm[80 µin]
Contact Shape & Form	Square
Contact Mating Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Mating Area Plating Material	Tin
Contact Type	Pin
Contact Current Rating (Max)	7.5 A

Termination Features

Square Termination Post & Tail Dimension	1.14 mm[.045 in]
Termination Post & Tail Length	3.6 mm[.146 in]
Termination Method to Printed Circuit Board	Through Hole - Solder

Mechanical Attachment

Mating Alignment Type	Polarization
Mating Retention	With
Panel Mount Feature	Without
Mating Retention Type	Latch
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	Without

Housing Features

Housing Material	Nylon 66
Centerline (Pitch)	3.96 mm[.156 in]

Dimensions

Connector Length	39.6 mm[1.55 in]
------------------	------------------



Connector Height	8.21 mm[.323 in]
Connector Width	15.57 mm[.613 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]

Usage Conditions

Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
Agency/Standard	UL
Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	1000
Packaging Type	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part












numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


 TE Part # 1-1744416-0 10 POS EP II HSG, GLOW WIRE	 TE Part # 1-1744498-0 10P EP-II HOUSING, BLACK	 TE Part # 1-1744544-0 EP II TPA 10P, BLACK	 TE Part # 1744525-5 EP RA 05P HEADER ASY NO 3 PIN
---	--	--	---

Also in the Series | Economy Power


 Connector Contacts(1)	 Insertion & Extraction Tools(1)	 PCB Headers & Receptacles(162)	 PCB Latches, Locks & Retainers(2)
 Power Contacts(8)	 Rectangular Connector Housings(1)	 Rectangular Power Connectors(302)	 Wire-to-Board Connector Assemblies & Housings(142)
 Wire-to-Board Connector Contacts(6)			

Customers Also Bought



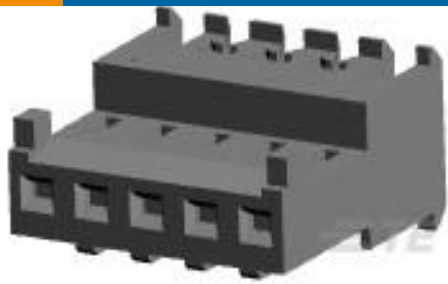

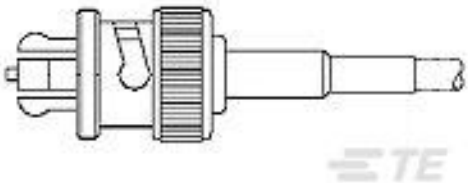

TE Part #3-644563-5
05P MTA100 CONN ASSY F/T 24AWG




TE Part #5051426-4
SAFE HIGH VOLTAGE PLUG




TE Part #1-2176412-6
5W XSM M/OX 5% 22R




TE Part #2-2176412-0
5W XSM M/OX 5% 33R




TE Part #3-2176412-0
5W XSM M/OX 5% 82R




TE Part #650992-5
096 ENHNCD EURO RECEPT AP ASSY




TE Part #4-640426-0
10P MTA156 CONN ASSY 18AWG
ORA

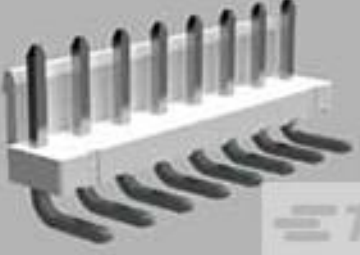

TE Part #1744428-2
3.96 EP HDR ASSY 2P R/A, GW



TE Part #382602-000
44A1121-24-0/2-9



TE Part #3-2176412-7
5W XSM M/OX 5% 160R

Documents

Product Drawings

3.96 EP HDR ASSY 10P R/A

English

CAD Files

Customer View Model

ENG_CVM_CVM_1-647676-0_B.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-647676-0_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-647676-0_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



1-1773885-9 Economy Power Connectors

English

Product Specifications

Application Specification

English

Application Specification

Japanese

Agency Approvals

UL Report

English