

### **Economy Power 2.5**

TE Internal #: 1969590-6

Housing, Receptacle, Wire-to-Panel / Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, White, Mating Retention,

Economy Power 2.5

View on TE.com >




Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings











Connector Product Type: Housing

Connector & Housing Type: Receptacle

Connector System: Wire-to-Panel, Wire-to-Wire

Number of Positions: 6

Centerline (Pitch): 2.5 mm [ .098 in ]

### **Features**

## **Product Type Features**

Connector Product Type Connector & Housing Type Receptacle Connector System Wire-to-Panel, Wire-to-Wire Sealable No Connector & Contact Terminates To Wire & Cable  Configuration Features Number of Positions Number of Rows 1  Electrical Characteristics Operating Voltage  Body Features  Primary Product Color  Wire & Cable  W		
Connector System  Sealable  No  Connector & Contact Terminates To  Wire & Cable  Configuration Features  Number of Positions  Number of Rows  1  Electrical Characteristics  Operating Voltage  Body Features	Connector Product Type	Housing
Sealable No  Connector & Contact Terminates To Wire & Cable  Configuration Features  Number of Positions 6  Number of Rows 1  Electrical Characteristics  Operating Voltage 250 VAC  Body Features	Connector & Housing Type	Receptacle
Connector & Contact Terminates To  Configuration Features  Number of Positions 6 Number of Rows 1  Electrical Characteristics Operating Voltage 250 VAC  Body Features	Connector System	Wire-to-Panel, Wire-to-Wire
Configuration Features  Number of Positions 6  Number of Rows 1  Electrical Characteristics  Operating Voltage 250 VAC  Body Features	Sealable	No
Number of Positions 6 Number of Rows 1  Electrical Characteristics Operating Voltage 250 VAC  Body Features	Connector & Contact Terminates To	Wire & Cable
Number of Rows 1  Electrical Characteristics  Operating Voltage 250 VAC  Body Features	Configuration Features	
Electrical Characteristics  Operating Voltage 250 VAC  Body Features	Number of Positions	6
Operating Voltage 250 VAC  Body Features	Number of Rows	1
Body Features	Electrical Characteristics	
	Operating Voltage	250 VAC
Primary Product Color White	Body Features	
	Primary Product Color	White



Contact Type	Pin
Contact Base Material	Brass
Contact Current Rating (Max)	7.5 A
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Strain Relief	Without
Panel Mount Feature	With
PCB Mount Retention	Without
Mating Retention Type	Latch
Mating Retention	With
Connector Mounting Type	Panel Mount
Housing Features	
Housing Entry Configuration	Both Ends Closed
Housing Material	Nylon - GF
Centerline (Pitch)	2.5 mm[.098 in]
Dimensions	
Connector Length	17.5 mm[.689 in]
Connector Height	6.6 mm[.26 in]
Connector Width	18.17 mm[.715 in]
Compatible Insulation Diameter Range	1.3 – 1.7 mm[.051 – .067 in]
Wire Size	.13 – .33 mm²
Usage Conditions	
Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	1000
Packaging Method	Bag



### Other

Discrete Wire Connector Comment	Panel Mount

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**





TE Part # 1969590-3 HSG, REC, PANEL MOUNT, SINGLE ROW,EP2.5









TE Part # 1969590-5 HSG, REC, PANEL MOUNT, SINGLE ROW,EP2.5




TE Part # 1969590-7 HSG, REC, PANEL MOUNT, SINGLE ROW,EP2.5



TE Part # 1969590-8 HSG, REC, PANEL MOUNT, SINGLE ROW,EP2.5



TE Part # 1969590-9 HSG, REC, PANEL MOUNT, SINGLE ROW,EP2.5

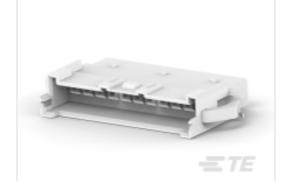

TE Part # 1-1969590-1 HSG, REC, PANEL MOUNT, SINGLE ROW,EP2.5



TE Part # 1-1969590-3 HSG, REC, PANEL MOUNT, SINGLE ROW,EP2.5



TE Part # 1-1969590-4 HSG, REC, PANEL MOUNT, SINGLE ROW,EP2.5



TE Part # 1-1969590-5 HSG, REC, PANEL MOUNT, SINGLE ROW,EP2.5



# Also in the Series | Economy Power 2.5



PCB Headers & Receptacles(494)




PCB Latches, Locks & Retainers(49)



Rectangular Power Connectors(43)



Wire-to-Board Connector Assemblies & Housings(311)

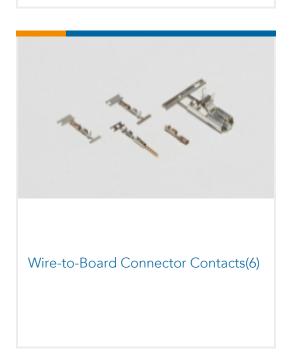

# Customers Also Bought





TE Part #1969442-6 EP 2.5 TPA Housing, 6 Pos



TE Part #1969442-4 EP 2.5 TPA Housing, 4 Pos



TE Part #1969442-5 EP 2.5 TPA Housing, 5 Pos



TE Part #1969590-3 HSG, REC, PANEL MOUNT, SINGLE ROW,EP2.5



TE Part #1969590-5 HSG, REC, PANEL MOUNT, SINGLE ROW,EP2.5



### **Documents**

### **Product Drawings**

HSG, REC, PANEL MOUNT, SINGLE ROW, EP2.5

English

### **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1969590-6\_C.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1969590-6\_C.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1969590-6\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## **Product Specifications**

**Application Specification** 

English

### **Instruction Sheets**

Instruction Sheet (U.S.)

English

### **Agency Approvals**

**UL Report** 

Housing, Receptacle, Wire-to-Panel / Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, White, Mating Retention, Economy Power 2.5



English