


4X Ø4.32

 REVISIONS

 REV
 ECO
 DESCRIPTION
 DATE
 BY
 APPR

 A1
 —
 RELEASE NUMBER
 30/NOV/18
 ROOKIE
 TOMMY

REQUIRES CONTACT
RETENTION WEDGE AW12P



12P RECEPTACLE, FLANGE MOUNT

AT04-12PX-L012

REV: A1

NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE SHEET 2 FOR KEY ARRANGEMENTS AND COLORS.

2. MATERIAL:

HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER

23.9

- 3. MODIFICATIONS: FLANGE
- 4. SPECIFICATIONS:
 - 4.1 CURRENT RATING: 13 AMPS
 - 4.2 OPERATING TEMPERATURE: -55°C TO +125°C.
 - 4.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 4.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25℃.

AMPHENOL STATEMENT STATEME

000000

45.0


- 4.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
- 4.6 MATING CYCLE DURABILITY: 100 CYCLES
- 4.7 RoHS COMPLIANT
- 5. MATING PART: AT06-12SX* PLUG. (X=A,B,C,D KEYS, * = MODIFICATIONS AND COLORS)
- 6. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

7 CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL	
SIZE	O.D.	O.D.	WIRE RANGE	
16	2.24 mm (.088 in)	3.68 mm (.145 in)	14 - 20 AWG	

	SEE S	HEET 2								
	PART NUMBER		IBER		DESCRIPTION		ITEM			
QUANTITY		- 1	MAT	ERI	RIALS LIST					
	WISE SPECIFIED	SIGN	IATURES	DATE			mnha	20	1	
1) All dimensions (2) Tolerances are (1 PL DEC ±0.30		DRAWN:	ROOKIE	30/NOV/18			mphe	\mathbf{HO}		
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:	ORION	30/NOV/18	//18 Sine Systems - www.amphenol-sine.com		_			
3) Note reference	-	ENGINEER:			44724 Morley Drive					
MATERIAL SPECIFICA	TIONS:	APPROVAL:	TOMMY	30/NOV/18			Clinton Township, MI 4803	00		
		CUSTOMER:				12	P RECEPTACLE, FLANGE	MOUNT		
			G IS SUPPLIED F							
		SPECIFICATION SHOWN HERE THE AMPHENIOF REPRODU	NS AND PERFO	RMANCE DATA ROPERTY OF DN. NO RIGHTS LIED. ALL	B	C-	AT04-12PX-	L012	PEN A	1 1
NEXT ASS'Y:			ING VARIATION		SCALE: NONE SHEET 1 OF 3		3			


		REVISIONS			
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE NUMBER	30/NOV/18	ROOKIE	TOMMY








KEY C CONFIGURATION STANDARD COLOR:GREEN

KEY D CONFIGURATION STANDARD COLOR:BROWN










12P RECEPTACLE, FLANGE MOUNT


DWG NO:


AT04-12PX-L012


REV: A1 SH:

~









KEY-A CONFIGURATION				
COLOR	PART NUMBER			
GREY	AT04-12PA-L012			

KEY-B CONFIGURATION				
COLOR PART NUMBER				
BL	ACK	AT04-12PB-L012		

KEY-C CONFIGURATION


COLOR PART NUMBER


GREEN AT04-12PC-L012


KEY-D CONFIGURATION				
COLOR PART NUMBER				
BROWN	AT04-12PD-L012			

	SEE S	HEET 2						
	PART N	IUMBER		PART NUMBER DESCRIPTION		DESCRIPTION		1
QUANTITY		ı	MAT	ERI	ALS LIST	•		
	WISE SPECIFIED	SIGN	IATURES	DATE			٦	
All dimensions (Tolerances are (1 PL DEC ±0.30		DRAWN:	ROOKIE	30/NOV/18	Amphenol			
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:	ORION	30/NOV/18	Sine Systems - www.amphenol-sine.com			
3) Note reference	- 🗴	ENGINEER:			44724 Morley Drive			
MATERIAL SPECIFICA	TIONS:	APPROVAL:	TOMMY	30/NOV/18	Clinton Township, MI 48036		_	
		CUSTOMER:		-	12P RECEPTACLE, FLANGE MOUNT			
PROCESS SPECIFICA	TIONIC.		G IS SUPPLIED F I ONLY. DESIGN		·			
PROCESS SPECIFICATIONS: SPECIFICATIONS AND I SHOWN HEREON ARE ' THE AMPHENOL CORP' OF REPRODUCTION AR DIMENSIONS ARE SUB-		ON ARE THE PR OL CORPORATIO CTION ARE IMPL	OPERTY OF ON. NO RIGHTS JED. ALL	B C- AT04-12PX-L012	A1	•		
NEXT ASSY:			ING VARIATIONS	S.	SCALE: NONE SHEET 2 OF		٦	

		REVISIONS			
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE NUMBER	30/NOV/18	ROOKIE	TOMMY
L AI	_	RELEASE NUMBER	30/110 1/16	ROOKIE	TOMMY

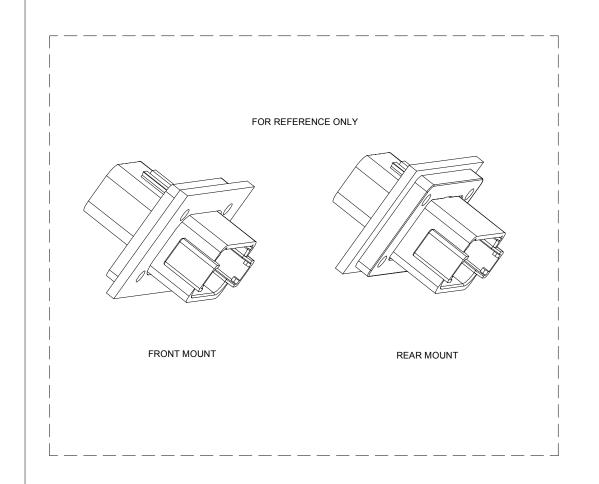

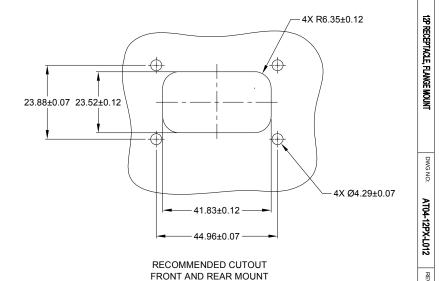

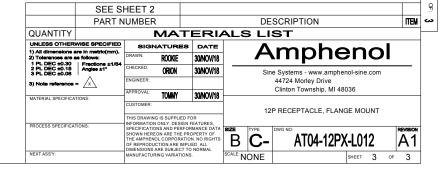

A

A Series™ - Contact Size 16 Options (Works with: AT, ATV, AHD-9, ARC, DuraMate and PanelMate Series)

	Machined Contacts, Sockets & Pins			
Part Number	Description	Size	AWG	Туре
AT60-215-1631	Male Contact - Pin, Gold-plated	16	14	Machined
AT62-209-1631	Female Contact - Socket, Gold-plated	16	14	Machined
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined
AT62-209-16141	Female Contact - Socket, Nickel-plated	16	14	Machined
AT60-202-1631	Male Contact - Pin, Gold-plated	16	16-20	Machined
AT62-201-1631	Female Contact - Socket, Gold-plated	16	16-20	Machined
AT60-202-16141	Male Contact - Pin, Nickel-plated	16	16-20	Machined
AT62-201-16141	Female Contact - Socket, Nickel-plated	16	16-20	Machined
AT60-202-1631-22	Male Contact - Pin, Gold-plated	16	22-24	Machined
AT62-201-1631-22	Female Contact - Socket, Gold-plated	16	22-24	Machined
AT60-202-16141-22	Male Contact - Pin, Nickel-plated	16	22-24	Machined
AT62-201-16141-22	Female Contact - Socket, Nickel-plated	16	22-24	Machined

Tooling - Machined Contacts						
Part Number	Description					
AUTK-20	Hand Crimp Tool, Size 20					
AUTK-100	Universal Heavy Duty Contact Crimping Tool Kit, Size 12/16/20					
CA-5D12	Universal Hand Crimp Tool, Size 12/16/20					
CA-5E12	Pneumatic Crimp Tool, Size 12/16/20					

Contact Removal Tools (For both Machined or Stamped & Formed Contacts)						
Part Number	Description					
ATRT-100	Contact and Wedgelock Extraction Tool					
AT11-310-1605	Contact Removal Tool, Plastic, Size 16					

Sealing Plugs (For both Machined or Stamped & Formed Contacts)					
Part Number	Description				
A114017	Sealing Plug, Size 16, White				
A114017-SR	Sealing Plug, Size 16, SR01 Series, Black				
AT13-217-1605	Locking Sealing Plug, Size 16, Grey				
AT13-217-1605-SR	Locking Sealing Plug, Size 16, SR01 Series, Red				

Stamped & Formed Contacts, Sockets & Pins				
Part Number	Description	Size	AWG	Туре
AT60-14-0144	Male Contact - Pin, Gold-plated	16	14-16	Stamped & Formed
AT62-14-0144	Female Contact - Socket, Gold-plated	16	14-16	Stamped & Formed
AT60-14-0122	Male Contact - Pin, Nickel-plated	16	14-16	Stamped & Formed
AT62-14-0122	Female Contact - Socket, Nickel-plated	16	14-16	Stamped & Formed
AT60-16-0144	Male Contact - Pin, Gold-plated	16	16-18	Stamped & Formed
AT62-16-0144	Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed
AT60-16-0122	Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed
AT62-16-0122	Female Contact - Socket, Nickel-plated	16	16-18	Stamped & Formed
AT60-16-0644	Male Contact - Pin, Gold-plated	16	18-20	Stamped & Formed
AT62-16-0644	Female Contact - Socket, Gold-plated	16	18-20	Stamped & Formed
AT60-16-0622	Male Contact - Pin, Nickel-plated	16	18-20	Stamped & Formed
AT62-16-0622	Female Contact - Socket, Nickel-plated	16	18-20	Stamped & Formed
AT60-16-0844	Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed
AT62-16-0844	Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed
AT60-16-0822	Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed
AT62-16-0822	Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed

Tooling - Stamped & Formed Contacts			
MFX-3950	Crimp Die - Size 16, 18-20AWG		
MFX-3953	Crimp Die - Size 16, 16-18AWG		
MFX-3975	Crimp Die - Size 16, 14-16AWG		
MFX-3990	Crimp Die - Size 16, 20-22AWG		
ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG		
ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG		
ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG		